



SPEC® CINT2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint®_rate2006 = 125

Asus P6T Deluxe (Intel Core i7-965 Extreme Edition)

SPECint_rate_base2006 = 117

CPU2006 license: 13


Test date: Oct-2008

Test sponsor: Intel Corporation

Hardware Availability: Nov-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

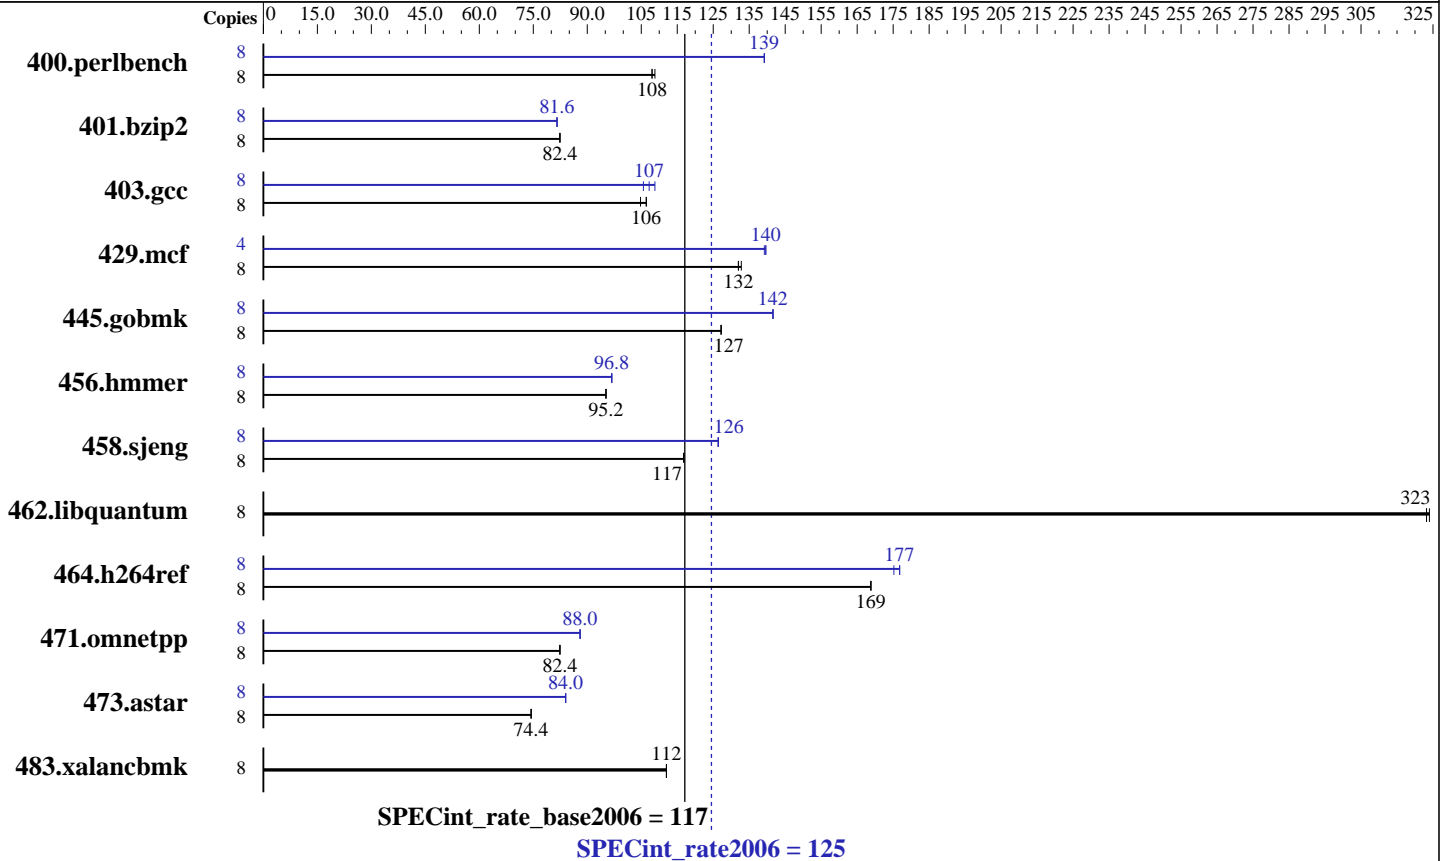

Hardware

CPU Name: Intel Core i7-965 Extreme Edition
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 12 GB (6 x 2GB Samsung M378B5673DZ1-CF8 DDR3-1066 CL7)
 Disk Subsystem: 80 GB Intel X-25M SATA Solid-State Drive
 Other Hardware: None

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None
 SmartHeap Library Version 8.1 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 125

Asus P6T Deluxe (Intel Core i7-965 Extreme Edition)

SPECint_rate_base2006 = 117

CPU2006 license: 13

Test date: Oct-2008

Test sponsor: Intel Corporation

Hardware Availability: Nov-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<u>725</u>	<u>108</u>	720	109	725	108	8	562	139	563	139	<u>562</u>	<u>139</u>
401.bzip2	8	940	82.4	<u>939</u>	<u>82.4</u>	938	82.4	8	943	81.6	946	81.6	<u>945</u>	<u>81.6</u>
403.gcc	8	607	106	615	105	<u>607</u>	<u>106</u>	8	<u>601</u>	<u>107</u>	608	106	594	109
429.mcf	8	551	133	<u>552</u>	<u>132</u>	554	132	4	262	139	<u>262</u>	<u>140</u>	261	140
445.gobmk	8	661	127	<u>660</u>	<u>127</u>	660	127	8	592	142	594	142	<u>593</u>	<u>142</u>
456.hammer	8	<u>783</u>	<u>95.2</u>	783	95.2	783	95.2	8	772	96.8	772	96.8	<u>772</u>	<u>96.8</u>
458.sjeng	8	828	117	<u>828</u>	<u>117</u>	827	117	8	765	126	765	126	<u>765</u>	<u>126</u>
462.libquantum	8	512	324	<u>513</u>	<u>323</u>	513	323	8	512	324	<u>513</u>	<u>323</u>	513	323
464.h264ref	8	1049	169	<u>1048</u>	<u>169</u>	1048	169	8	<u>1001</u>	<u>177</u>	1011	175	1001	177
471.omnetpp	8	608	82.4	<u>608</u>	<u>82.4</u>	608	82.4	8	568	88.0	568	88.0	<u>568</u>	<u>88.0</u>
473.astar	8	<u>753</u>	<u>74.4</u>	753	74.4	754	74.4	8	668	84.0	669	84.0	<u>669</u>	<u>84.0</u>
483.xalanbmk	8	493	112	492	112	<u>492</u>	<u>112</u>	8	493	112	492	112	<u>492</u>	<u>112</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
System was configured with nVidia GTX 280 discrete graphics card
Binaries were built on Windows Vista Ultimate (32-bit)

Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99

C++ benchmarks:
icl -Qvc9

Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalanbmk: -Qoption, cpp, --no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 125

Asus P6T Deluxe (Intel Core i7-965 Extreme Edition)

SPECint_rate_base2006 = 117

CPU2006 license: 13

Test date: Oct-2008

Test sponsor: Intel Corporation

Hardware Availability: Nov-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

401.bzp2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
/F512000000

458.sjeng: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

473.astar: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 125

Asus P6T Deluxe (Intel Core i7-965 Extreme Edition)

SPECint_rate_base2006 = 117

CPU2006 license: 13

Test date: Oct-2008

Test sponsor: Intel Corporation

Hardware Availability: Nov-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

473.astar (continued):

`-link /FORCE:MULTIPLE`

483.xalancbmk: basepeak = yes

Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.html>

<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.xml>

<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Mar 3 13:59:30 2009 by SPEC CPU2006 PS/PDF formatter v6197.