



# SPEC® CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

### SPECfp®\_rate2006 = 78.9

### Asus P6T Deluxe (Intel Core i7-920)

### SPECfp\_rate\_base2006 = 76.0

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

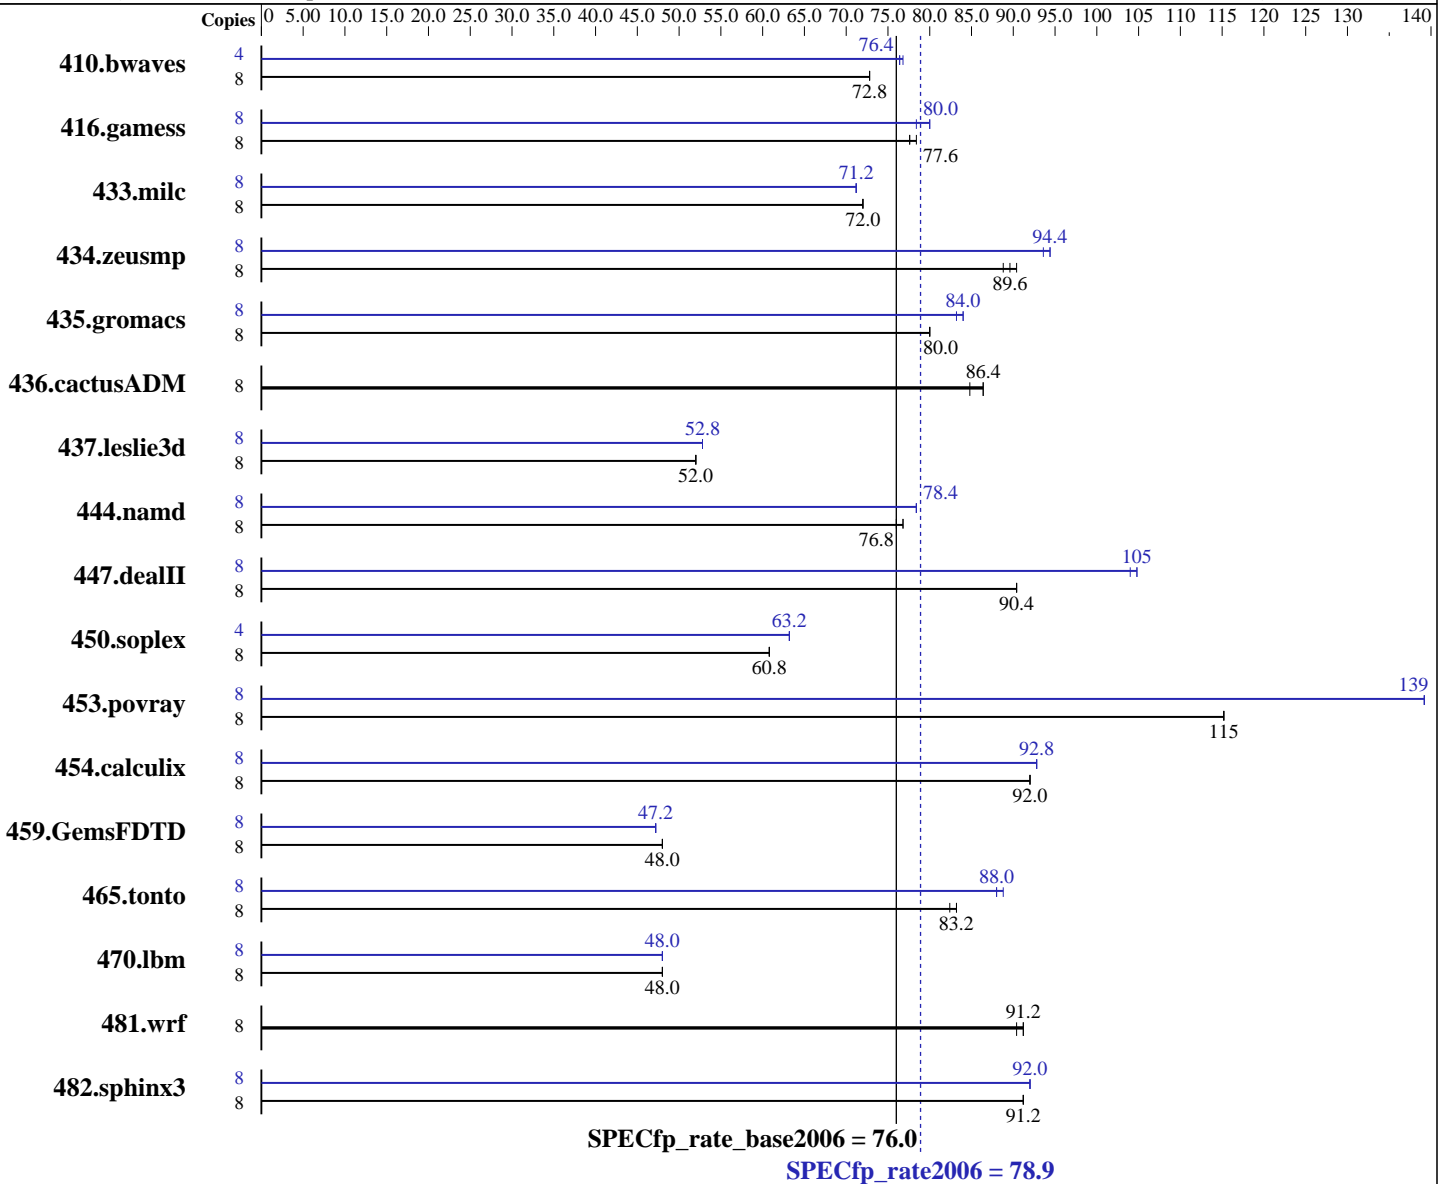

#### Hardware

CPU Name: Intel Core i7-920  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)  
 Compiler: Intel C++ Compiler Professional 11.0 for IA32  
 Build 20080930 Package ID: w\_cproc\_p\_11.0.054  
 Intel Visual Fortran Compiler Professional 11.0 for IA32  
 Build 20080930 Package ID: w\_cprof\_p\_11.0.054  
 Microsoft Visual Studio 2008 (for libraries)  
 Auto Parallel: No  
 File System: NTFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECfp\_rate2006 = **78.9**

## Asus P6T Deluxe (Intel Core i7-920)

SPECfp\_rate\_base2006 = **76.0**

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

### Hardware (Continued)

### Software (Continued)

L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 12 GB (6 x 2GB Samsung M378B5673DZ1-CF8 DDR3-1066 CL7)  
 Disk Subsystem: 80 GB Intel X-25M SATA Solid-State Drive  
 Other Hardware: None

System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1489	72.8	1488	72.8	<b>1488</b>	<b>72.8</b>	4	710	76.4	<b>710</b>	<b>76.4</b>	709	76.8
416.gamess	8	1994	78.4	2017	77.6	<b>2013</b>	<b>77.6</b>	8	<b>1965</b>	<b>80.0</b>	2001	78.4	1965	80.0
433.milc	8	1025	72.0	1025	72.0	<b>1025</b>	<b>72.0</b>	8	<b>1026</b>	<b>71.2</b>	1026	71.2	1026	71.2
434.zeusmp	8	<b>813</b>	<b>89.6</b>	821	88.8	804	90.4	8	<b>774</b>	<b>94.4</b>	776	93.6	773	94.4
435.gromacs	8	717	80.0	<b>715</b>	<b>80.0</b>	714	80.0	8	686	83.2	682	84.0	<b>683</b>	<b>84.0</b>
436.cactusADM	8	1133	84.8	<b>1107</b>	<b>86.4</b>	1104	86.4	8	1133	84.8	<b>1107</b>	<b>86.4</b>	1104	86.4
437.leslie3d	8	<b>1437</b>	<b>52.0</b>	1437	52.0	1437	52.0	8	1433	52.8	<b>1433</b>	<b>52.8</b>	1433	52.8
444.namd	8	843	76.0	<b>838</b>	<b>76.8</b>	838	76.8	8	820	78.4	<b>819</b>	<b>78.4</b>	819	78.4
447.dealII	8	1013	90.4	<b>1012</b>	<b>90.4</b>	1012	90.4	8	874	105	879	104	<b>874</b>	<b>105</b>
450.soplex	8	<b>1100</b>	<b>60.8</b>	1100	60.8	1099	60.8	4	528	63.2	<b>528</b>	<b>63.2</b>	527	63.2
453.povray	8	<b>369</b>	<b>115</b>	368	115	370	115	8	<b>306</b>	<b>139</b>	306	139	306	139
454.calculix	8	717	92.0	<b>716</b>	<b>92.0</b>	715	92.0	8	710	92.8	709	92.8	<b>709</b>	<b>92.8</b>
459.GemsFDTD	8	1776	48.0	1771	48.0	<b>1771</b>	<b>48.0</b>	8	<b>1786</b>	<b>47.2</b>	1784	47.2	1795	47.2
465.tonto	8	<b>949</b>	<b>83.2</b>	948	83.2	955	82.4	8	<b>891</b>	<b>88.0</b>	890	88.8	891	88.0
470.lbm	8	2303	48.0	<b>2303</b>	<b>48.0</b>	2303	48.0	8	<b>2303</b>	<b>48.0</b>	2303	48.0	2303	48.0
481.wrf	8	985	90.4	<b>981</b>	<b>91.2</b>	980	91.2	8	985	90.4	<b>981</b>	<b>91.2</b>	980	91.2
482.sphinx3	8	1703	91.2	<b>1703</b>	<b>91.2</b>	1705	91.2	8	1697	92.0	1698	92.0	<b>1697</b>	<b>92.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## General Notes

Tested systems can be used with Shin-G ATX case,  
 PC Power and Cooling 1200W power supply  
 System was configured with nVidia GTX 280 discrete graphics card  
 Binaries were built on Windows Vista Ultimate (32-bit)



# SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp\_rate2006 = 78.9

Asus P6T Deluxe (Intel Core i7-920)

SPECfp\_rate\_base2006 = 76.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

## Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qc99 ifort

## Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F1000000000 shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

Benchmarks using both Fortran and C:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

## Peak Optimization Flags

C benchmarks:

433.milc: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa /F1000000000

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp\_rate2006 = 78.9

Asus P6T Deluxe (Intel Core i7-920)

SPECfp\_rate\_base2006 = 76.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

470.lbm: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F1000000000

482.sphinx3: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

### C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE

447.dealII: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias  
-Qscalar-rep- /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE

450.soplex: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE

453.povray: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000  
shlw32m.lib -link /FORCE:MULTIPLE

### Fortran benchmarks:

410.bwaves: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F1000000000

416.gamess: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias  
-Qscalar-rep- /F1000000000

434.zeusmp: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- /F1000000000

437.leslie3d: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

459.GemsFDTD: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch  
/F1000000000

465.tonto: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

### Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp\_rate2006 = 78.9

Asus P6T Deluxe (Intel Core i7-920)

SPECfp\_rate\_base2006 = 76.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.html>

<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.xml>

<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Mar 3 14:11:14 2009 by SPEC CPU2006 PS/PDF formatter v6197.