



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECfp[®]_rate2006 = 96.4

3DBOXX WORKSTATION 8400

SPECfp_rate_base2006 = 88.2

CPU2006 license: 3314


Test date: Nov-2008

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Nov-2008

Tested by: BOXX Technologies, Inc.

Software Availability: Nov-2008

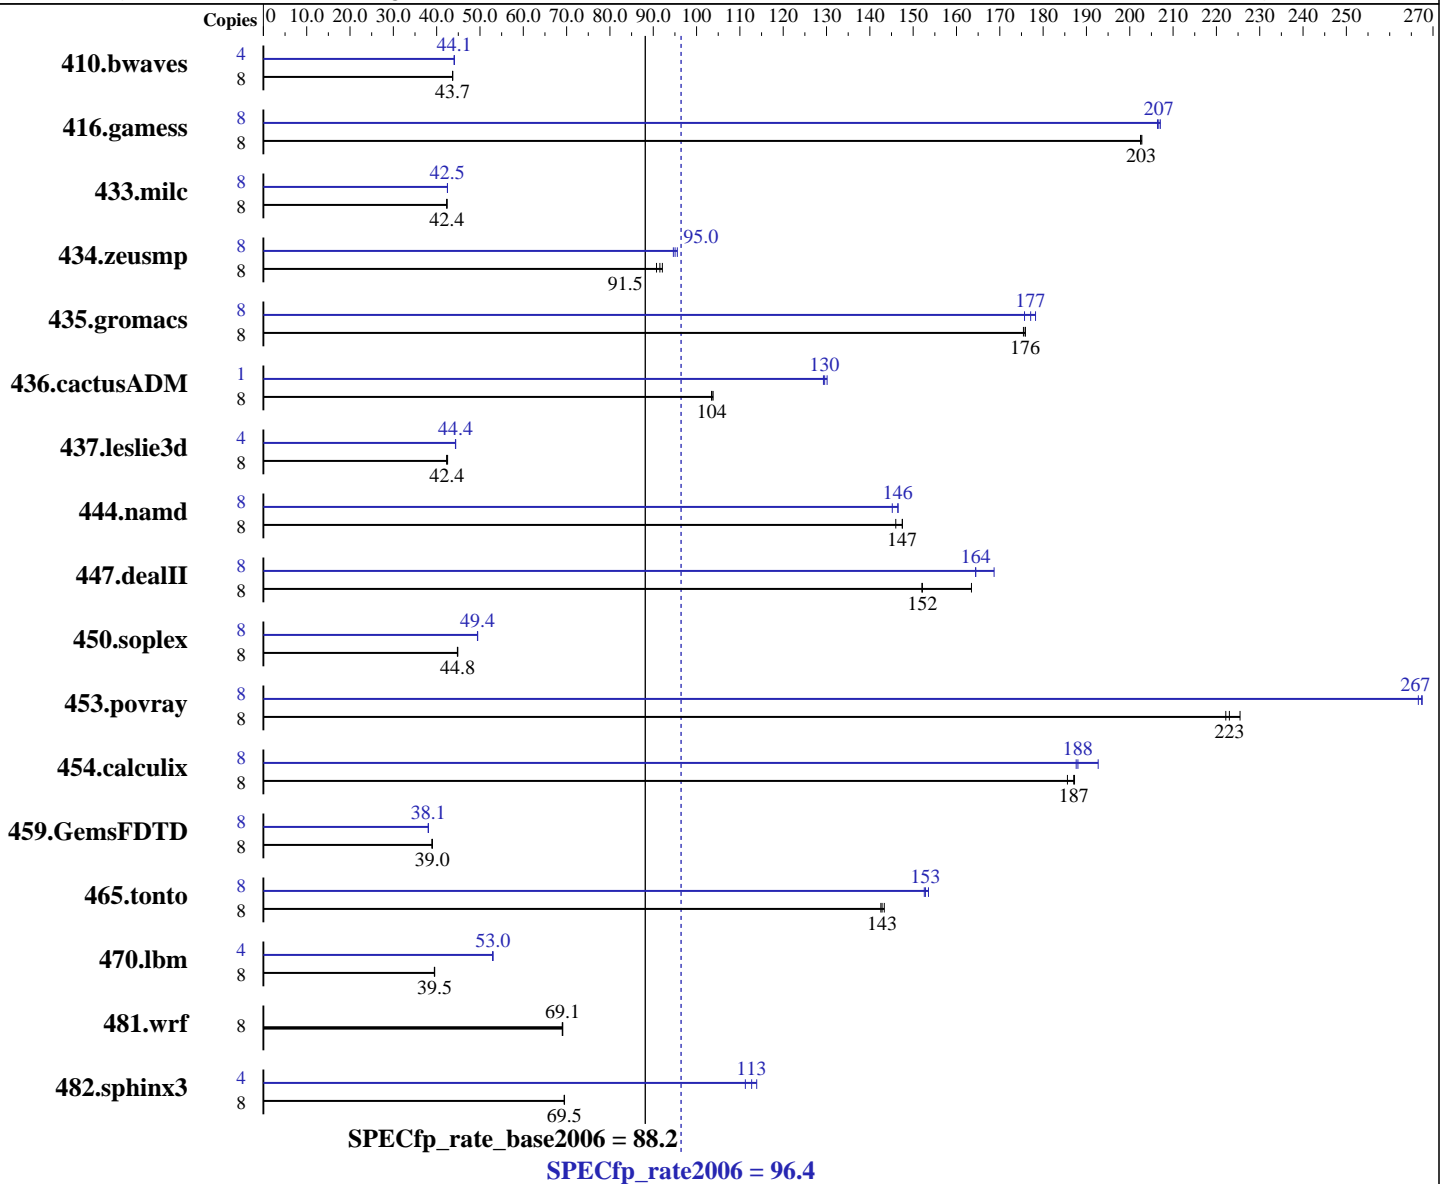

Hardware

CPU Name: Intel Xeon X5492
 CPU Characteristics: 1600 MHz Bus speed
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECfp_rate2006 = 96.4

3DBOXX WORKSTATION 8400

SPECfp_rate_base2006 = 88.2

CPU2006 license: 3314

Test date: Nov-2008

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Nov-2008

Tested by: BOXX Technologies, Inc.

Software Availability: Nov-2008

L3 Cache: None
 Other Cache: None
 Memory: 32 GB (8 x 4GB ECC PC2-6400,CL5,FBDIMM)
 Disk Subsystem: 300 GB SATA, 10000RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	2488	43.7	2490	43.7	<u>2488</u>	<u>43.7</u>	4	1233	44.1	1234	44.1	<u>1233</u>	<u>44.1</u>
416.gamess	8	<u>773</u>	<u>203</u>	774	202	772	203	8	<u>758</u>	<u>207</u>	759	206	756	207
433.milc	8	1734	42.4	1734	42.4	<u>1734</u>	<u>42.4</u>	8	1728	42.5	1728	42.5	<u>1728</u>	<u>42.5</u>
434.zeusmp	8	<u>795</u>	<u>91.5</u>	802	90.8	790	92.1	8	769	94.6	<u>766</u>	<u>95.0</u>	762	95.6
435.gromacs	8	<u>325</u>	<u>176</u>	325	176	326	175	8	325	176	<u>322</u>	<u>177</u>	320	178
436.cactusADM	8	924	103	<u>923</u>	<u>104</u>	921	104	1	91.8	130	<u>92.2</u>	<u>130</u>	92.4	129
437.leslie3d	8	1768	42.5	1777	42.3	<u>1775</u>	<u>42.4</u>	4	847	44.4	848	44.3	<u>848</u>	<u>44.4</u>
444.namd	8	<u>435</u>	<u>147</u>	435	148	439	146	8	442	145	<u>438</u>	<u>146</u>	438	147
447.dealII	8	560	163	602	152	<u>602</u>	<u>152</u>	8	557	164	543	169	<u>557</u>	<u>164</u>
450.soplex	8	1490	44.8	<u>1488</u>	<u>44.8</u>	1487	44.9	8	1350	49.4	1349	49.5	<u>1350</u>	<u>49.4</u>
453.povray	8	192	222	189	225	<u>191</u>	<u>223</u>	8	159	268	160	267	<u>159</u>	<u>267</u>
454.calculix	8	352	187	356	186	<u>353</u>	<u>187</u>	8	<u>351</u>	<u>188</u>	352	188	342	193
459.GemsFDTD	8	2181	38.9	2175	39.0	<u>2178</u>	<u>39.0</u>	8	<u>2228</u>	<u>38.1</u>	2230	38.1	2228	38.1
465.tonto	8	549	143	<u>551</u>	<u>143</u>	552	143	8	513	154	516	153	<u>515</u>	<u>153</u>
470.lbm	8	2785	39.5	2781	39.5	<u>2781</u>	<u>39.5</u>	4	<u>1037</u>	<u>53.0</u>	1037	53.0	1039	52.9
481.wrf	8	1293	69.1	<u>1294</u>	<u>69.1</u>	1295	69.0	8	1293	69.1	<u>1294</u>	<u>69.1</u>	1295	69.0
482.sphinx3	8	2243	69.5	2245	69.5	<u>2245</u>	<u>69.5</u>	4	685	114	<u>692</u>	<u>113</u>	701	111

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 taskset was used to bind processes to cores except
 for 436.cactusADM peak

General Notes

OMP_NUM_THREADS set to number of processors
 KMP_AFFINITY set to "physical,0"
 KMP_STACKSIZE set to 64M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECfp_rate2006 = 96.4

3DBOXX WORKSTATION 8400

SPECfp_rate_base2006 = 88.2

CPU2006 license: 3314

Test date: Nov-2008

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Nov-2008

Tested by: BOXX Technologies, Inc.

Software Availability: Nov-2008

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECfp_rate2006 = 96.4

3DBOXX WORKSTATION 8400

SPECfp_rate_base2006 = 88.2

CPU2006 license: 3314

Test date: Nov-2008

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Nov-2008

Tested by: BOXX Technologies, Inc.

Software Availability: Nov-2008

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
             -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
             -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
            -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
            -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/ifort
              -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
              -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECfp_rate2006 = 96.4

3DBOXX WORKSTATION 8400

SPECfp_rate_base2006 = 88.2

CPU2006 license: 3314

Test date: Nov-2008

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Nov-2008

Tested by: BOXX Technologies, Inc.

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

BOXX Technologies, Inc.

SPECfp_rate2006 = 96.4

3DBOXX WORKSTATION 8400

SPECfp_rate_base2006 = 88.2

CPU2006 license: 3314

Test date: Nov-2008

Test sponsor: BOXX Technologies, Inc.

Hardware Availability: Nov-2008

Tested by: BOXX Technologies, Inc.

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.15.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.15.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:00:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 November 2008.