



SPEC[®] CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp[®]_rate2006 = 102

ASUS P6T WS PRO workstation motherboard (Intel Core i7-965 Extreme Edition)

SPECfp_rate_base2006 = 99.1

CPU2006 license: 009016


Test date: Dec-2008

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2008

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2008

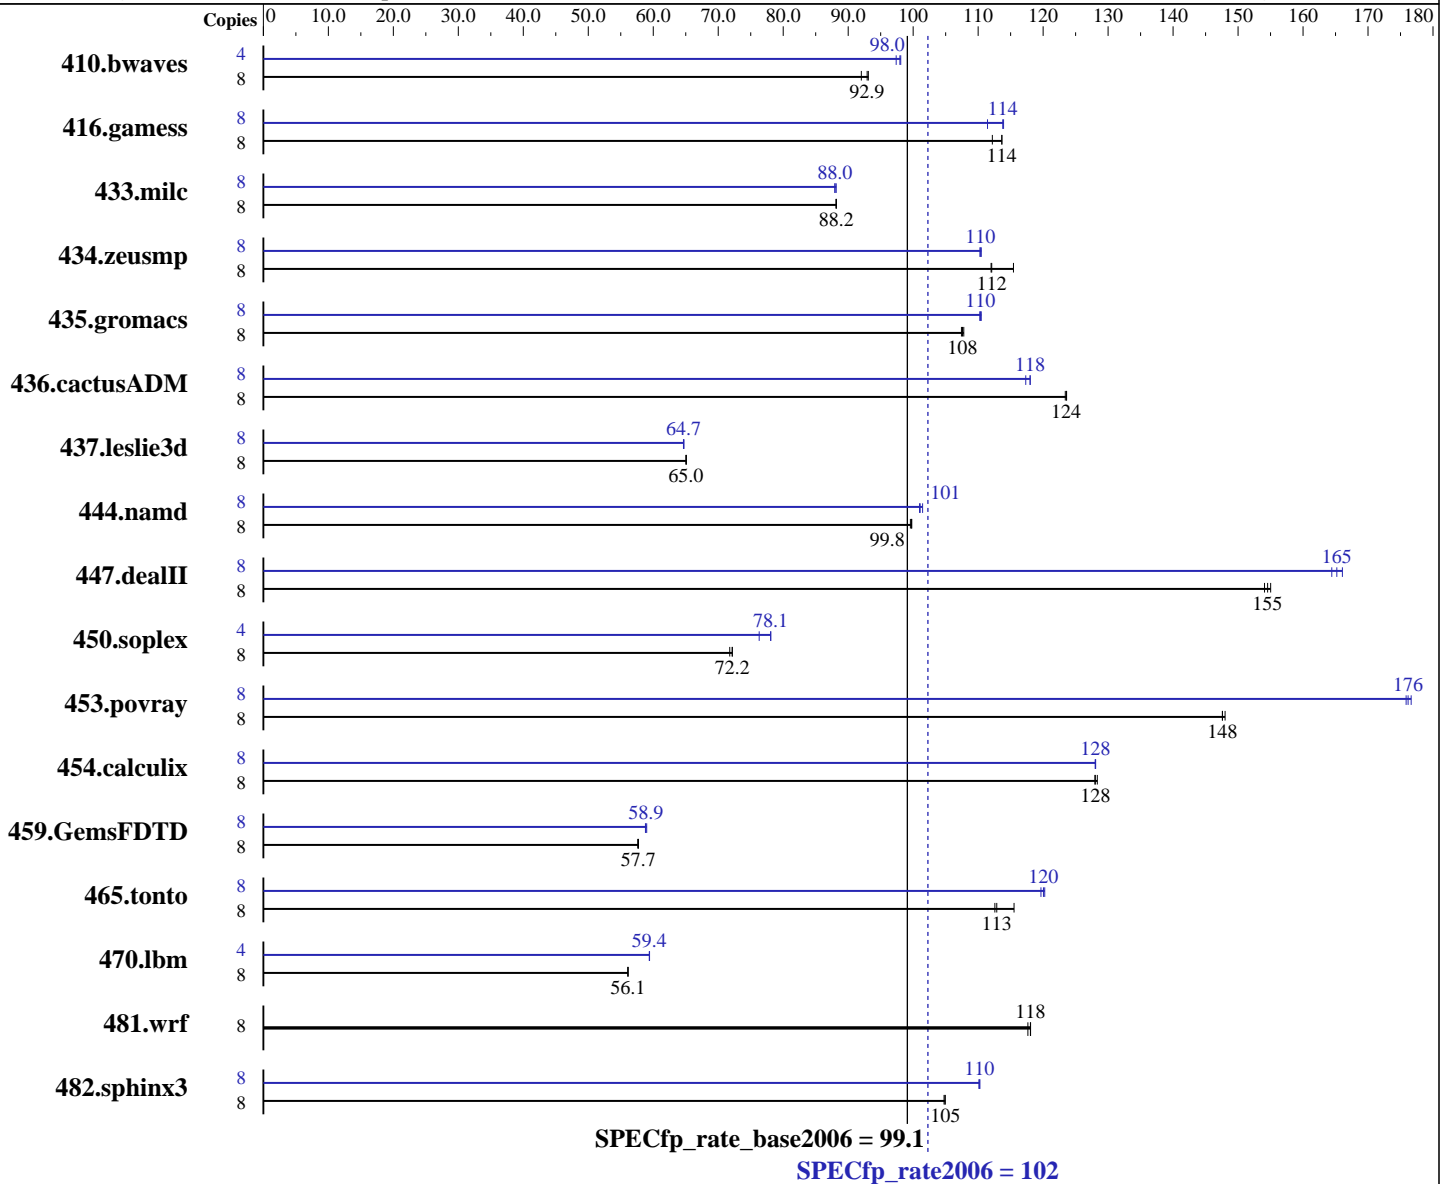

Hardware

CPU Name: Intel Core i7-965 Extreme Edition
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smpp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066, l_cprof_p_11.0.066
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 102

ASUS P6T WS PRO workstation motherboard (Intel Core i7-965 Extreme Edition)

SPECfp_rate_base2006 = 99.1

CPU2006 license: 009016

Test date: Dec-2008

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2008

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2008

Hardware (Continued)

Software (Continued)

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 12 GB (6 x 2GB DDR3-1333 ECC, CL=9)
 Disk Subsystem: Hitachi HDT725050VLA360 500GB SATAII, 7200RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	1181	92.0	1168	93.1	1170	92.9	4	558	97.4	555	98.0	554	98.1		
416.gamess	8	1378	114	1396	112	1378	114	8	1375	114	1406	111	1377	114		
433.milc	8	833	88.1	833	88.2	833	88.2	8	835	87.9	835	88.0	833	88.2		
434.zeusmp	8	650	112	631	115	649	112	8	660	110	660	110	659	110		
435.gromacs	8	530	108	531	108	532	107	8	517	110	518	110	518	110		
436.cactusADM	8	774	124	775	123	773	124	8	810	118	815	117	810	118		
437.leslie3d	8	1156	65.0	1156	65.0	1155	65.1	8	1162	64.7	1163	64.7	1163	64.6		
444.namd	8	643	99.8	643	99.8	644	99.6	8	632	101	635	101	635	101		
447.dealII	8	592	155	590	155	594	154	8	551	166	554	165	557	164		
450.soplex	8	930	71.8	925	72.2	925	72.2	4	437	76.3	427	78.1	427	78.1		
453.povray	8	288	148	288	148	288	148	8	242	176	242	176	241	177		
454.calculix	8	514	128	516	128	515	128	8	515	128	516	128	515	128		
459.GemsFDTD	8	1473	57.6	1470	57.7	1471	57.7	8	1444	58.8	1439	59.0	1442	58.9		
465.tonto	8	699	113	681	116	697	113	8	658	120	655	120	656	120		
470.lbm	8	1959	56.1	1959	56.1	1959	56.1	4	925	59.4	925	59.4	925	59.4		
481.wrf	8	757	118	757	118	760	118	8	757	118	757	118	760	118		
482.sphinx3	8	1486	105	1486	105	1488	105	8	1414	110	1415	110	1416	110		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'numactl' used to bind processes to CPUs

Platform Notes

Tested systems can be used with formfactors.org ATX 2.2 spec
PC Power and Cooling 600W power supply
System was configured with ATi RV530LE discrete graphics card



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 102

ASUS P6T WS PRO workstation motherboard (Intel Core i7-965 Extreme Edition)

SPECfp_rate_base2006 = 99.1

CPU2006 license: 009016

Test date: Dec-2008

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2008

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2008

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 102

ASUS P6T WS PRO workstation motherboard (Intel Core i7-965 Extreme Edition)

SPECfp_rate_base2006 = 99.1

CPU2006 license: 009016

Test date: Dec-2008

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2008

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2008

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 102

ASUS P6T WS PRO workstation motherboard (Intel Core i7-965 Extreme Edition)

SPECfp_rate_base2006 = 99.1

CPU2006 license: 009016

Test date: Dec-2008

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2008

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp_rate2006 = 102

ASUS P6T WS PRO workstation motherboard (Intel Core i7-965 Extreme Edition)

SPECfp_rate_base2006 = 99.1

CPU2006 license: 009016

Test date: Dec-2008

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Nov-2008

Tested by: ASUSTeK Computer Inc.

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.06.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.06.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Mon Jul 13 10:30:29 2009 by SPEC CPU2006 PS/PDF formatter v6323.