SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i120Ra-e1
(Intel Xeon L5215)

SPECfp®2006 = 17.0

SPECfp_base2006 = 16.3

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jan-2009
Hardware Availability: Jan-2009
Software Availability: Nov-2008

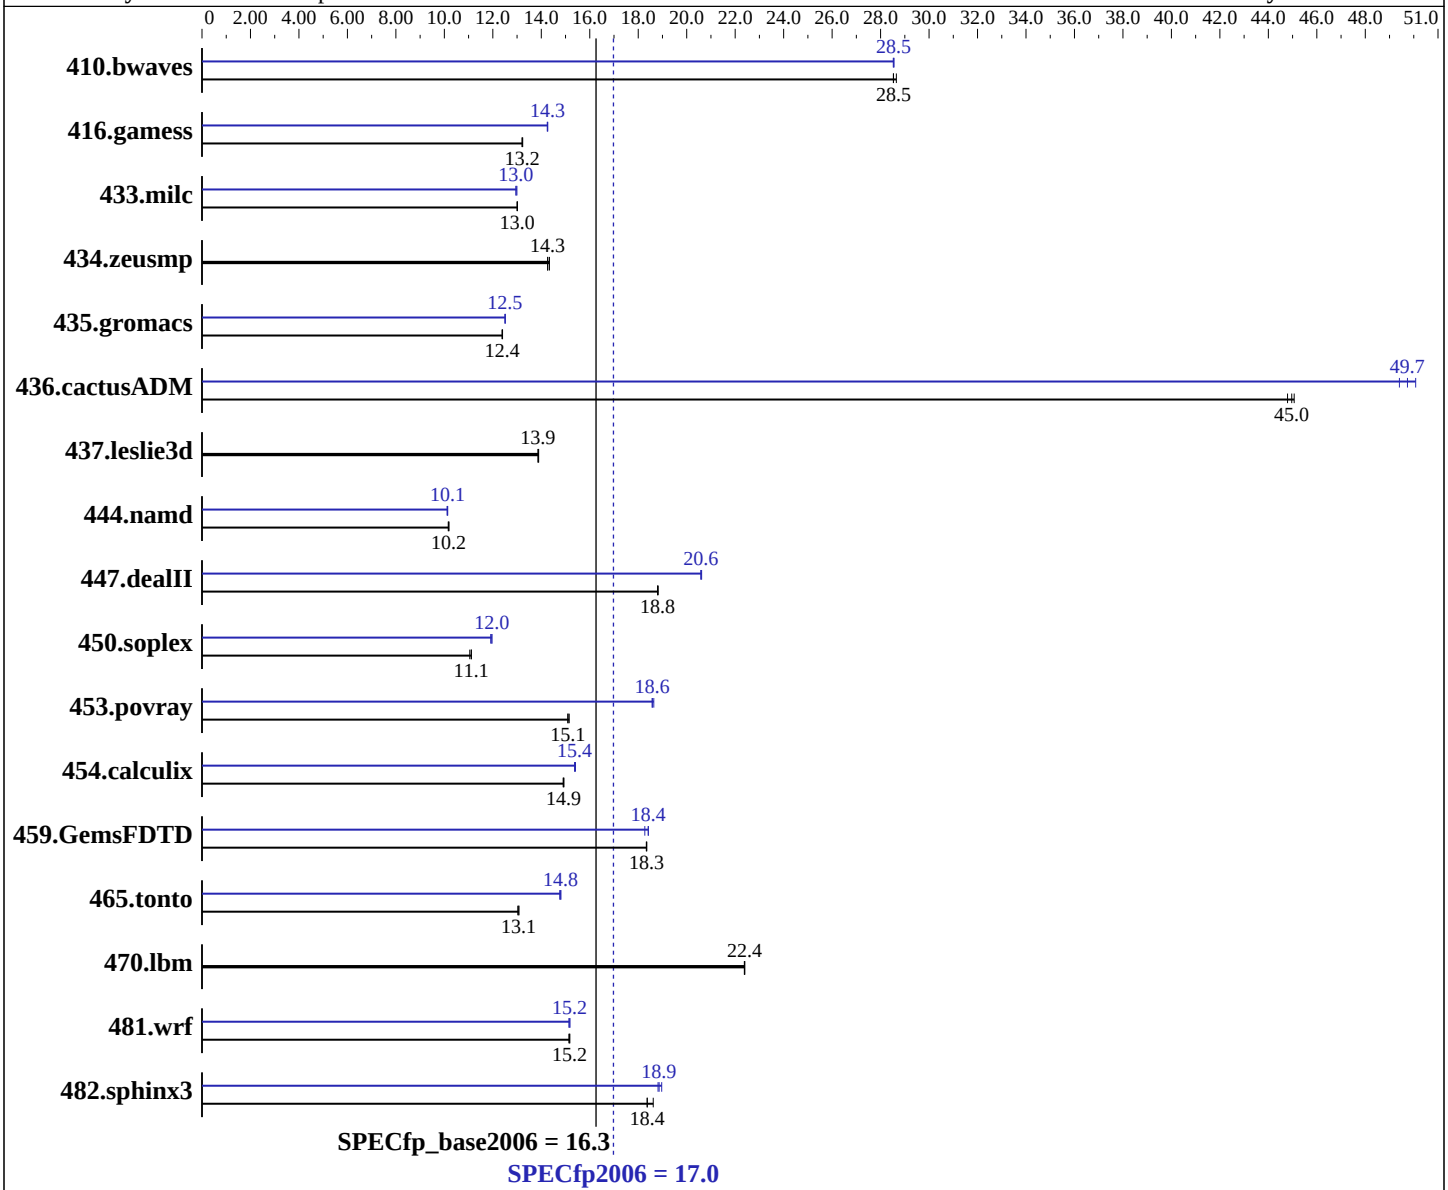

Hardware

CPU Name:	Intel Xeon L5215
CPU Characteristics:	1066 MHz system bus
CPU MHz:	1867
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074, l_fproc_p_11.0.074
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/i120Ra-e1
(Intel Xeon L5215)

SPECfp2006 = 17.0

SPECfp_base2006 = 16.3

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jan-2009
Hardware Availability: Jan-2009
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (4x4 GB PC2-5300P, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x80 GB SATAII, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	476	28.5	**476**	**28.5**	474	28.7	**476**	**28.5**	476	28.5	476	28.5
416.gamess	1482	13.2	1480	13.2	**1482**	**13.2**	1374	14.2	**1373**	**14.3**	1373	14.3
433.milc	705	13.0	706	13.0	**706**	**13.0**	709	13.0	706	13.0	**708**	**13.0**
434.zeusmp	635	14.3	**638**	**14.3**	638	14.3	635	14.3	**638**	**14.3**	638	14.3
435.gromacs	**576**	**12.4**	576	12.4	577	12.4	**571**	**12.5**	571	12.5	571	12.5
436.cactusADM	267	44.8	**266**	**45.0**	265	45.1	242	49.4	**240**	**49.7**	239	50.1
437.leslie3d	**678**	**13.9**	677	13.9	678	13.9	**678**	**13.9**	677	13.9	678	13.9
444.namd	787	10.2	**788**	**10.2**	789	10.2	791	10.1	**791**	**10.1**	793	10.1
447.dealII	608	18.8	609	18.8	**608**	**18.8**	555	20.6	**556**	**20.6**	556	20.6
450.soplex	**751**	**11.1**	750	11.1	755	11.0	697	12.0	**697**	**12.0**	700	11.9
453.povray	351	15.2	**352**	**15.1**	353	15.1	286	18.6	285	18.6	**286**	**18.6**
454.calculix	**553**	**14.9**	554	14.9	552	14.9	535	15.4	537	15.4	**536**	**15.4**
459.GemsFDTD	**578**	**18.3**	579	18.3	578	18.4	576	18.4	**576**	**18.4**	581	18.3
465.tonto	753	13.1	**753**	**13.1**	755	13.0	**665**	**14.8**	665	14.8	667	14.8
470.lbm	614	22.4	**614**	**22.4**	613	22.4	614	22.4	**614**	**22.4**	613	22.4
481.wrf	736	15.2	**736**	**15.2**	738	15.1	736	15.2	**736**	**15.2**	738	15.1
482.sphinx3	1047	18.6	1061	18.4	**1061**	**18.4**	1036	18.8	1027	19.0	**1033**	**18.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M
```

Platform Notes

```
Bios settings:
Hardware Prefetcher:              Enabled
Adjacent Cache Line Prefetch:     Enabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

482.sphinx3: /opt/intel/Compiler/11.0/074/bin/ia32/icc
-L/opt/intel/Compiler/11.0/074/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/074/ipp/ia32/include

C++ benchmarks (except as noted below):
icpc

450.soplex: /opt/intel/Compiler/11.0/074/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/074/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/074/ipp/ia32/include

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel -auto-ilp32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.20090710.html`
`http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.20090710.xml`
`http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:00:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 March 2009.