



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint®_rate2006 = 56.4

ACTINA SOLAR 220 X2 (Intel Xeon E5405, 2.0 GHz)

SPECint_rate_base2006 = 52.6

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Mar-2009

Hardware Availability: Sep-2008

Software Availability: Nov-2008

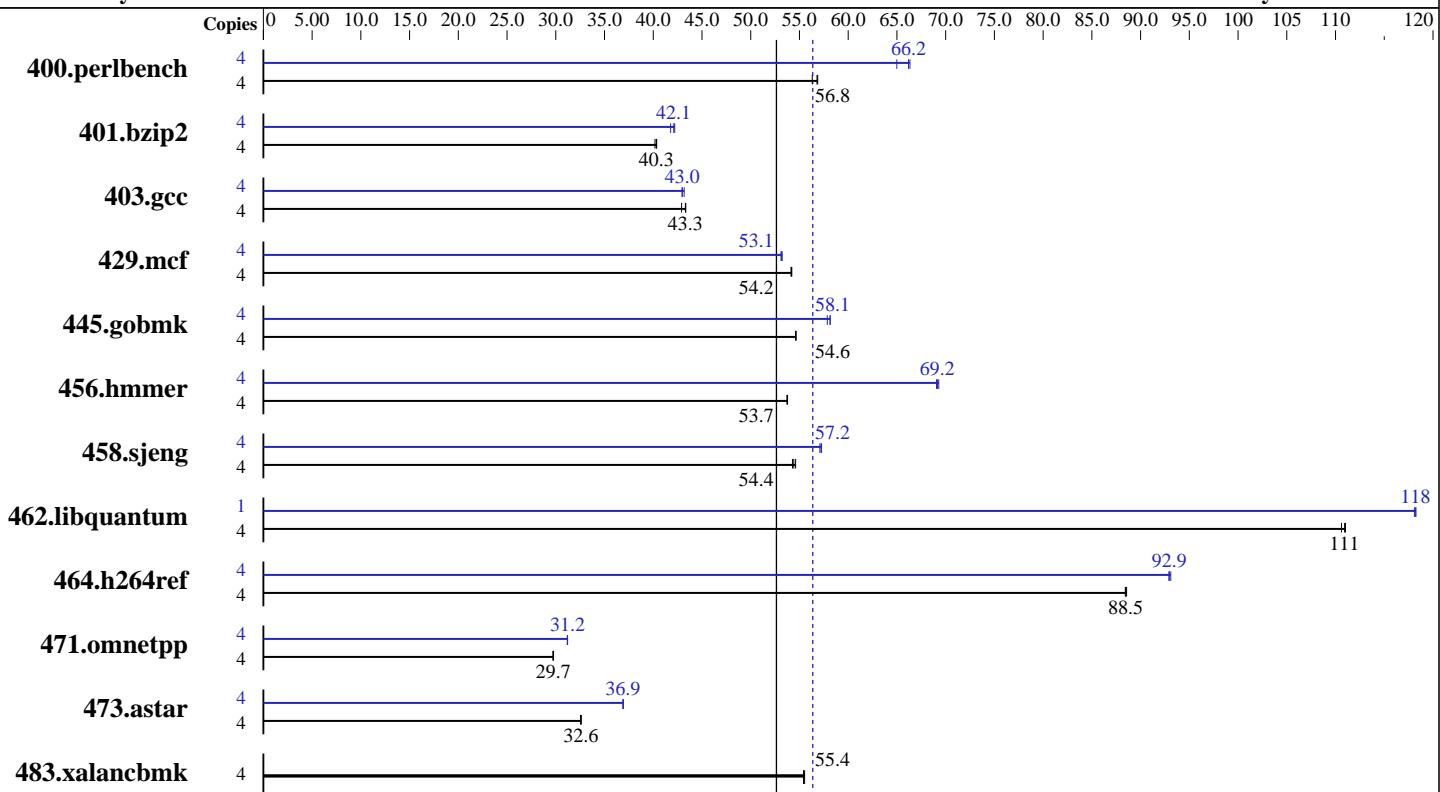

SPECint_rate_base2006 = 52.6

SPECint_rate2006 = 56.4

Hardware

CPU Name:	Intel Xeon E5405
CPU Characteristics:	1333 MHz System Bus
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x 2 GB, PC2-5300, CL 5-5-5, FB ECC)
Disk Subsystem:	2x 300 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SuSe Linux Enterprise Server 10 (x86_64) with SP2, kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 56.4

ACTINA SOLAR 220 X2 (Intel Xeon E5405, 2.0 GHz)

SPECint_rate_base2006 = 52.6

CPU2006 license: 9008

Test date: Mar-2009

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2008

Tested by: ACTION S.A.

Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	687	56.9	694	56.3	688	56.8	4	589	66.3	601	65.0	590	66.2
401.bzip2	4	961	40.2	957	40.3	957	40.4	4	917	42.1	924	41.8	915	42.2
403.gcc	4	743	43.3	750	42.9	744	43.3	4	750	43.0	746	43.2	749	43.0
429.mcf	4	673	54.2	674	54.1	673	54.2	4	686	53.1	685	53.2	687	53.1
445.gobmk	4	768	54.6	768	54.6	768	54.6	4	722	58.2	722	58.1	725	57.9
456.hammer	4	694	53.8	695	53.7	694	53.7	4	539	69.3	540	69.2	540	69.1
458.sjeng	4	889	54.4	886	54.6	892	54.3	4	845	57.3	846	57.2	848	57.1
462.libquantum	4	747	111	747	111	749	111	1	175	118	175	118	175	118
464.h264ref	4	1001	88.5	1001	88.4	1000	88.6	4	951	93.1	953	92.9	952	92.9
471.omnetpp	4	840	29.8	842	29.7	840	29.7	4	801	31.2	801	31.2	802	31.2
473.astar	4	861	32.6	863	32.5	862	32.6	4	761	36.9	761	36.9	760	36.9
483.xalancbmk	4	498	55.4	498	55.4	497	55.5	4	498	55.4	498	55.4	497	55.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

'taskset' was used to bind processes to cores except
for 462.libquantum peak

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of processors

KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint_rate2006 = 56.4
ACTINA SOLAR 220 X2 (Intel Xeon E5405, 2.0 GHz)	SPECint_rate_base2006 = 52.6
CPU2006 license: 9008	Test date: Mar-2009
Test sponsor: ACTION S.A.	Hardware Availability: Sep-2008
Tested by: ACTION S.A.	Software Availability: Nov-2008

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc

456.hmmr: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 56.4

ACTINA SOLAR 220 X2 (Intel Xeon E5405, 2.0 GHz)

SPECint_rate_base2006 = 52.6

CPU2006 license: 9008

Test date: Mar-2009

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2008

Tested by: ACTION S.A.

Software Availability: Nov-2008

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                -no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
                -opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo  
                -no-prec-div -ansi-alias

456.hmmr: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll12  
                -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                -no-prec-div -static -unroll14

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static  
                -opt-malloc-options=3 -parallel -par-runtime-control  
                -opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                -no-prec-div -static -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                -no-prec-div -ansi-alias -opt-ra-region-strategy=block  
                -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                -no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
                -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint_rate2006 = 56.4
ACTINA SOLAR 220 X2 (Intel Xeon E5405, 2.0 GHz)	SPECint_rate_base2006 = 52.6
CPU2006 license: 9008	Test date: Mar-2009
Test sponsor: ACTION S.A.	Hardware Availability: Sep-2008
Tested by: ACTION S.A.	Software Availability: Nov-2008

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 01:50:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 April 2009.