



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint®_rate2006 = 122

Servidor Itautec LX213 (Intel Xeon E5504)

SPECint_rate_base2006 = 112

CPU2006 license: 9001


Test date: Apr-2009

Test sponsor: Itautec

Hardware Availability: Mar-2009

Tested by: Itautec

Software Availability: Feb-2009

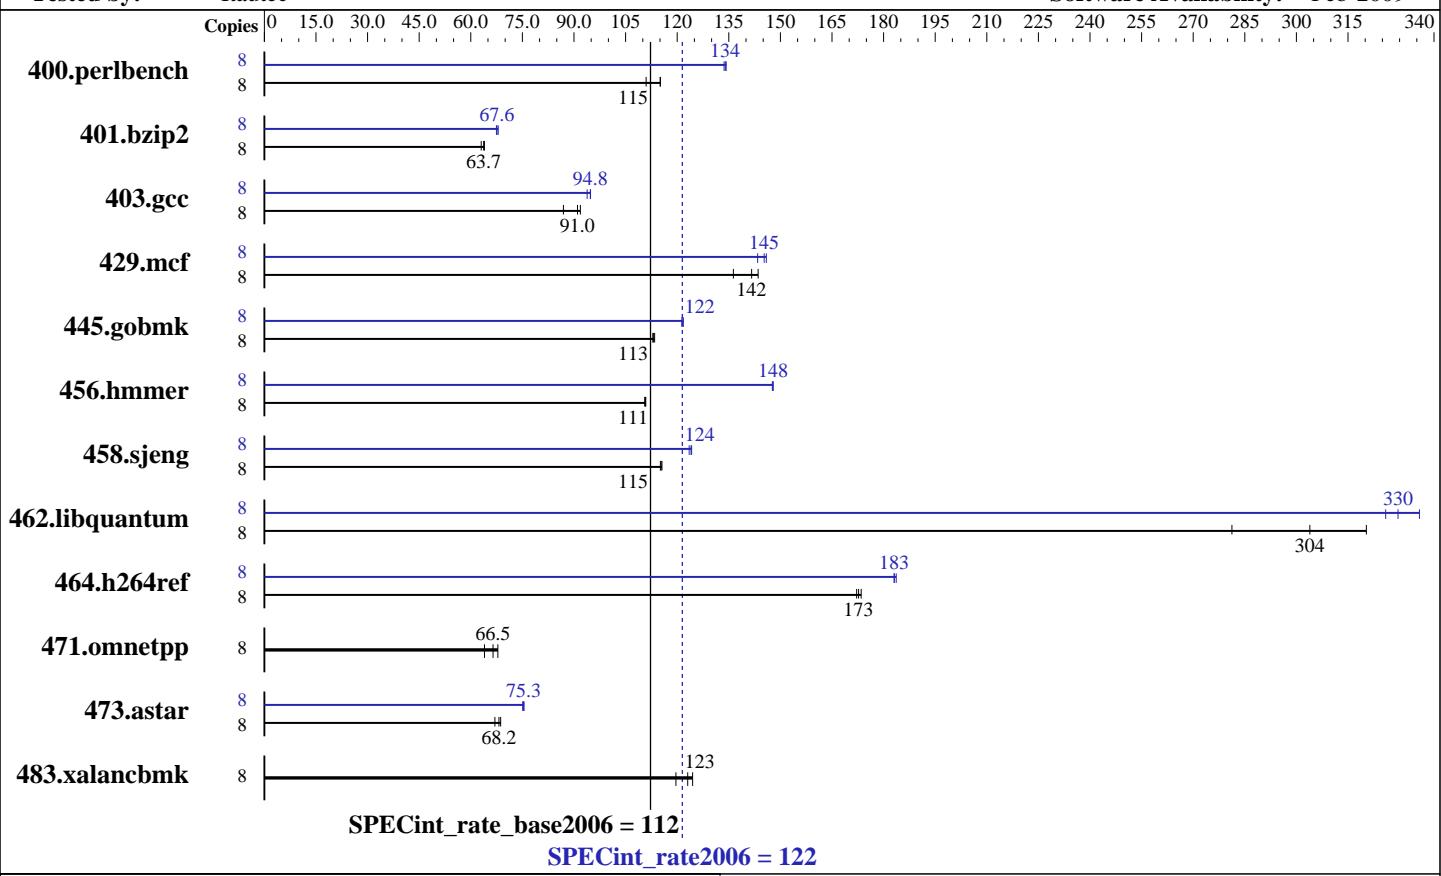

Hardware		Software	
CPU Name:	Intel Xeon E5504	Operating System:	SuSe Linux SLES10 SP2, Kernel 2.6.16.60-0.34-smp for x86_64
CPU Characteristics:		Compiler:	Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.081
CPU MHz:	2000	Auto Parallel:	No
FPU:	Integrated	File System:	ReiserFS
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1, 2 chips	Base Pointers:	32-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502
L3 Cache:	4 MB I+D on chip per chip		
Other Cache:	None		
Memory:	24 GB (6 x 4GB DDR3-1333, CL 9, ECC, running at 800MHz)		
Disk Subsystem:	1 x 160 GB SATA-2, 7200RPM		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

Servidor Itautech LX213 (Intel Xeon E5504)

SPECint_rate2006 = 122

CPU2006 license: 9001

Test date: Apr-2009

Test sponsor: Itautech

Hardware Availability: Mar-2009

Tested by: Itautech

Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	704	111	<u>679</u>	<u>115</u>	679	115	8	585	134	<u>583</u>	<u>134</u>	582	134
401.bzip2	8	1207	64.0	1225	63.0	<u>1211</u>	<u>63.7</u>	8	1136	68.0	1144	67.5	<u>1142</u>	<u>67.6</u>
403.gcc	8	741	86.9	701	91.9	<u>708</u>	<u>91.0</u>	8	686	93.8	679	94.8	<u>680</u>	<u>94.8</u>
429.mcf	8	535	136	<u>515</u>	<u>142</u>	508	144	8	509	143	<u>502</u>	<u>145</u>	500	146
445.gobmk	8	743	113	<u>742</u>	<u>113</u>	740	113	8	692	121	689	122	<u>690</u>	<u>122</u>
456.hammer	8	675	111	<u>673</u>	<u>111</u>	673	111	8	505	148	505	148	505	148
458.sjeng	8	<u>839</u>	<u>115</u>	841	115	838	116	8	<u>781</u>	<u>124</u>	779	124	784	123
462.libquantum	8	589	281	<u>545</u>	<u>304</u>	517	320	8	509	326	<u>503</u>	<u>330</u>	494	336
464.h264ref	8	1028	172	<u>1025</u>	<u>173</u>	1020	173	8	967	183	<u>967</u>	<u>183</u>	964	184
471.omnetpp	8	781	64.0	<u>752</u>	<u>66.5</u>	737	67.9	8	781	64.0	<u>752</u>	<u>66.5</u>	737	67.9
473.astar	8	838	67.0	<u>824</u>	<u>68.2</u>	818	68.7	8	748	75.1	<u>745</u>	<u>75.3</u>	744	75.5
483.xalancbmk	8	461	120	<u>449</u>	<u>123</u>	443	124	8	461	120	<u>449</u>	<u>123</u>	443	124

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

General Notes

This result was measured on the Servidor Itautech LX203.
The Servidor Itautech LX213 and Servidor Itautech LX203 are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECint_rate2006 = 122

Servidor Itaute LX213 (Intel Xeon E5504)

SPECint_rate_base2006 = 112

CPU2006 license: 9001

Test date: Apr-2009

Test sponsor: Itaute

Hardware Availability: Mar-2009

Tested by: Itaute

Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/opt/sh/SmartHeap_8.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/Compiler/11.0/081/bin/intel64/icc
```

```
456.hmmr: /opt/intel/Compiler/11.0/081/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/081/bin/intel64/icc
```

C++ benchmarks (except as noted below):

```
icpc
```

```
473.astar: /opt/intel/Compiler/11.0/081/bin/intel64/icpc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmr: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

SPECint_rate2006 = 122

Servidor Itautech LX213 (Intel Xeon E5504)

SPECint_rate_base2006 = 112

CPU2006 license: 9001

Test date: Apr-2009

Test sponsor: Itautech

Hardware Availability: Mar-2009

Tested by: Itautech

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

SPECint_rate2006 = 122

Servidor Itautech LX213 (Intel Xeon E5504)

SPECint_rate_base2006 = 112

CPU2006 license: 9001

Test date: Apr-2009

Test sponsor: Itautech

Hardware Availability: Mar-2009

Tested by: Itautech

Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.09.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.09.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:51:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 May 2009.