



SPEC® CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint®2006 = 36.1

ASUS RS700D (Z8NH-D12) server system (Intel Xeon X5570)

SPECint_base2006 = 32.0

CPU2006 license: 9016


Test date: May-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

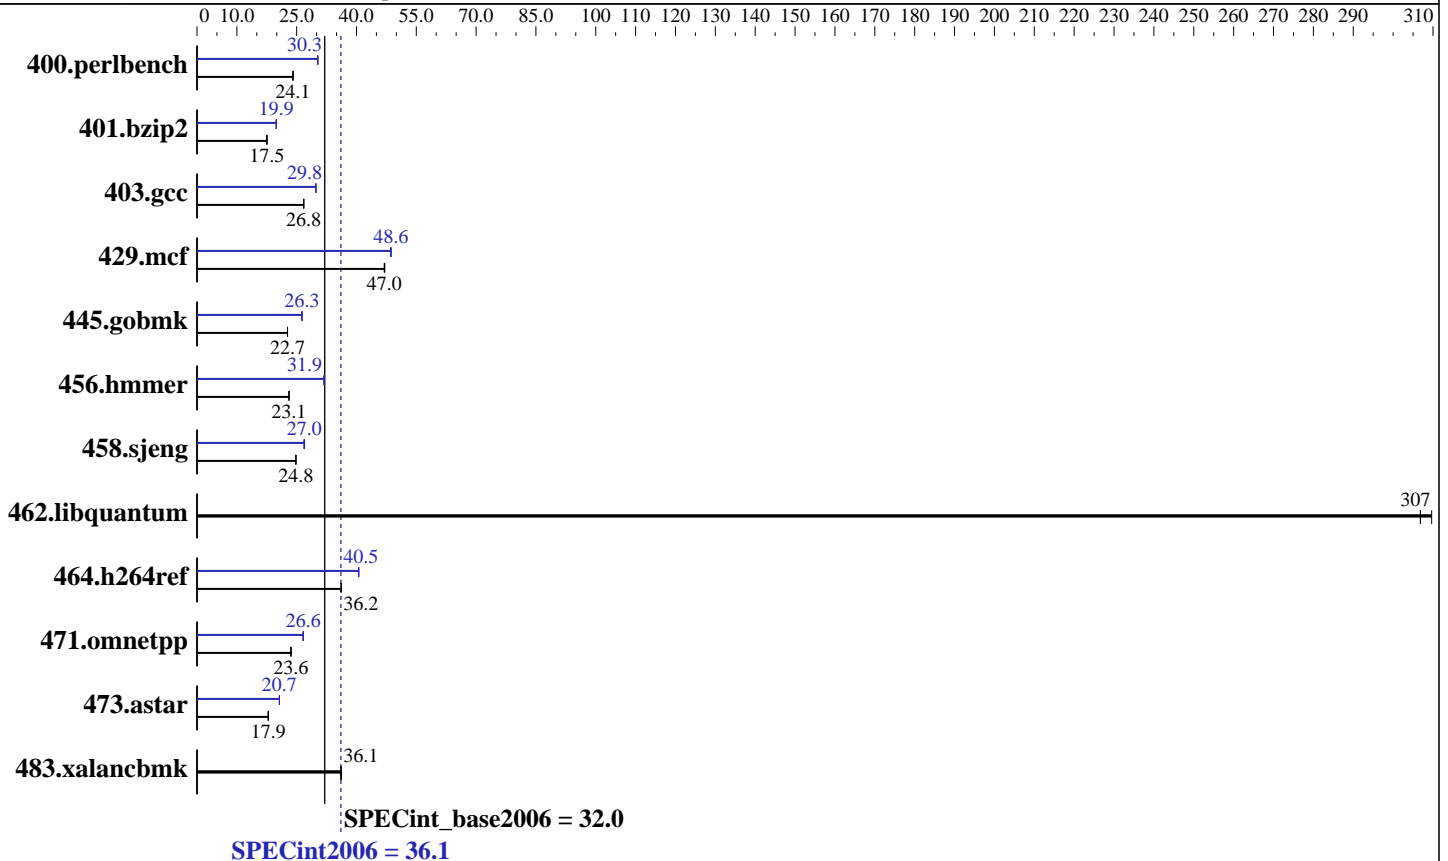

Hardware

CPU Name: Intel Xeon X5570
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 X 4 GB PC3-10600R, CL=9)
 Disk Subsystem: HITACHI HDT725050VLA360 500GB SATAII, 7200RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2 with patch Kernel linux 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 36.1

ASUS RS700D (Z8NH-D12) server system (Intel Xeon X5570)

SPECint_base2006 = 32.0

CPU2006 license: 9016

Test date: May-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	406	24.0	405	24.1	406	24.1	<u>323</u>	<u>30.3</u>	322	30.4	323	30.2
401.bzip2	552	17.5	549	17.6	550	17.5	486	19.8	485	19.9	485	19.9
403.gcc	301	26.8	300	26.8	301	26.7	270	29.8	270	29.8	270	29.8
429.mcf	194	47.0	194	47.1	194	47.0	187	48.7	188	48.6	188	48.6
445.gobmk	462	22.7	462	22.7	462	22.7	397	26.4	399	26.3	399	26.3
456.hmmer	405	23.1	404	23.1	404	23.1	293	31.8	293	31.9	293	31.9
458.sjeng	489	24.8	487	24.8	488	24.8	448	27.0	452	26.8	449	27.0
462.libquantum	66.9	310	67.5	307	67.5	307	66.9	310	67.5	307	67.5	307
464.h264ref	613	36.1	612	36.2	611	36.2	546	40.5	546	40.5	545	40.6
471.omnetpp	265	23.6	266	23.5	265	23.6	235	26.6	235	26.6	234	26.7
473.astar	394	17.8	392	17.9	392	17.9	339	20.7	340	20.7	340	20.6
483.xalancbmk	191	36.1	190	36.3	191	36.1	191	36.1	190	36.3	191	36.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Component Notes

Tested system case compliance with Intel EEB 3.61 spec
SSI Server Power Supply 650W or higher
System was configured with ASPEED AST2050 VGA (on board VGA)

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 36.1

ASUS RS700D (Z8NH-D12) server system (Intel Xeon X5570)

SPECint_base2006 = 32.0

CPU2006 license: 9016

Test date: May-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 36.1

ASUS RS700D (Z8NH-D12) server system (Intel Xeon X5570)

SPECint_base2006 = 32.0

CPU2006 license: 9016

Test date: May-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Peak Portability Flags (Continued)

473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint2006 = 36.1

ASUS RS700D (Z8NH-D12) server system (Intel Xeon X5570)

SPECint_base2006 = 32.0

CPU2006 license: 9016

Test date: May-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

Same as Base Other Flags

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Fri Jul 10 15:45:50 2009 by SPEC CPU2006 PS/PDF formatter v6323.