




SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp®2006 = 25.3

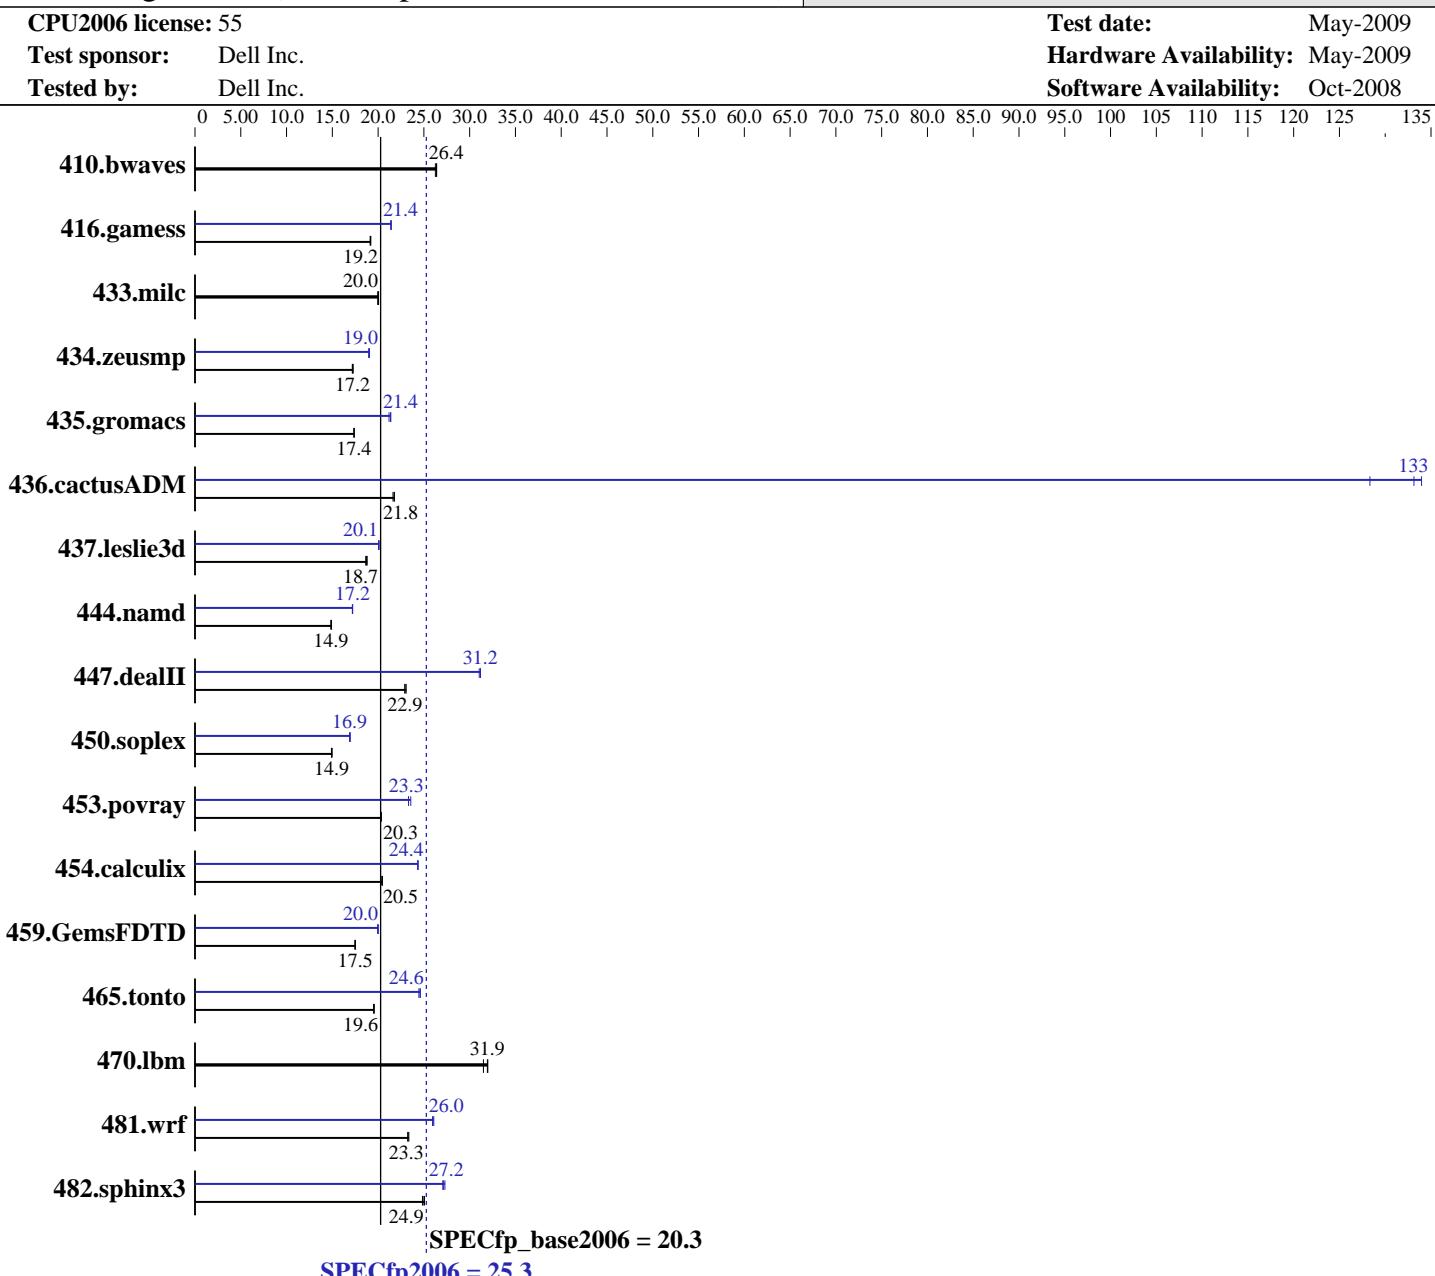

Hardware

CPU Name: AMD Opteron 2393 SE
 CPU Characteristics:
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 25.3

PowerEdge R805 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp_base2006 = 20.3

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB DDR2-800)
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS
 Other Hardware: None

Other Software: binutils 2.18
 32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	515	26.4	515	26.4	518	26.3	515	26.4	515	26.4	518	26.3
416.gamess	1024	19.1	1020	19.2	1020	19.2	915	21.4	915	21.4	914	21.4
433.milc	458	20.0	460	20.0	459	20.0	458	20.0	460	20.0	459	20.0
434.zeusmp	530	17.2	529	17.2	527	17.3	479	19.0	477	19.1	479	19.0
435.gromacs	411	17.4	411	17.4	411	17.4	337	21.2	334	21.4	334	21.4
436.cactusADM	549	21.8	549	21.8	553	21.6	89.2	134	93.1	128	89.8	133
437.leslie3d	500	18.8	502	18.7	504	18.6	469	20.1	467	20.1	469	20.1
444.namd	539	14.9	538	14.9	540	14.8	466	17.2	466	17.2	467	17.2
447.dealII	499	22.9	496	23.1	499	22.9	367	31.2	367	31.2	368	31.0
450.soplex	557	15.0	559	14.9	560	14.9	494	16.9	492	17.0	493	16.9
453.povray	262	20.3	262	20.3	262	20.3	226	23.6	228	23.3	228	23.3
454.calculix	403	20.5	403	20.5	406	20.3	339	24.4	339	24.4	339	24.3
459.GemsFDTD	606	17.5	607	17.5	606	17.5	532	20.0	531	20.0	530	20.0
465.tonto	504	19.5	503	19.6	503	19.6	400	24.6	402	24.5	400	24.6
470.lbm	430	31.9	430	32.0	436	31.5	430	31.9	430	32.0	436	31.5
481.wrf	480	23.3	481	23.2	478	23.4	428	26.1	431	25.9	430	26.0
482.sphinx3	778	25.1	782	24.9	784	24.8	720	27.1	718	27.2	714	27.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation RPMs that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm.nr_hugepages=7146 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp2006 = 25.3

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_MORECORE = "yes"

LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"

NCPUS = "8"

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-Mvect=cachesize:6291456 -fastsse -Msmar_malloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp2006 = 25.3

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Base Optimization Flags (Continued)

C++ benchmarks:

```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Fortran benchmarks:

```
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-Mipa=jobs:4
```

C++ benchmarks:

```
-Mipa=jobs:4
```

Fortran benchmarks:

```
-Mipa=jobs:4
```

Benchmarks using both Fortran and C:

```
-Mipa=jobs:4
```

Peak Compiler Invocation

C benchmarks:

```
pgcc
```

C++ benchmarks (except as noted below):

```
pathCC
```

```
444.namd: pgcpp
```

Fortran benchmarks (except as noted below):

```
pgf95
```

```
416.gamess: pathf95
```

```
459.GemsFDTD: pathf95
```

```
465.tonto: pathf95
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 25.3

PowerEdge R805 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp_base2006 = 20.3

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C (except as noted below):

pathcc pathf95

436.cactusADM: pgcc pgf95

454.calculix: pgcc pgf95

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2)
 -Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmaralloc
 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
 -Munroll=n:4 -Munroll=m:8 -Msmaralloc=huge -Mnodepchk
 -Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 25.3

PowerEdge R805 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp_base2006 = 20.3

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartralloc=huge
-Msmartralloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartralloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfpreflated -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp2006 = 25.3

SPECfp_base2006 = 20.3

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2009

Hardware Availability: May-2009

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur
 -Msmartralloc=huge -Mfrelaxed -Mipa=fast -Mipa=inline
 -tp barcelona-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2)
 -Mvect=cachesize:6291456 -fastsse -Msmartralloc=huge
 -Mprefetch=t0 -Mpre -Mfrelaxed -tp barcelona-64
 -Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
 -LNO:prefetch_ahead=10 -LANG:copyinout=off
 -IPA:callee_limit=5000 -GRA:prioritize_by_density=on
 -OPT:malloc_alg=1 -m3dnow
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
 -L/usr/lib64 -lhugetlbfs

Peak Other Flags

C benchmarks:

-Mipa=jobs : 4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs : 4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs : 4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs : 4(pass 2)

435.gromacs: No flags used

481.wrf: No flags used

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.html

<http://www.spec.org/cpu2006/flags/pathscale32-flags.html>

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 25.3

PowerEdge R805 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp_base2006 = 20.3

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.xml
<http://www.spec.org/cpu2006/flags/pathscale32-flags.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:22:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 May 2009.