



SPEC® CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®_rate2006 = Not Run

Acer Aspire 3810T (Intel Core 2 Duo SU9400)

SPECfp_rate_base2006 = 17.4

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

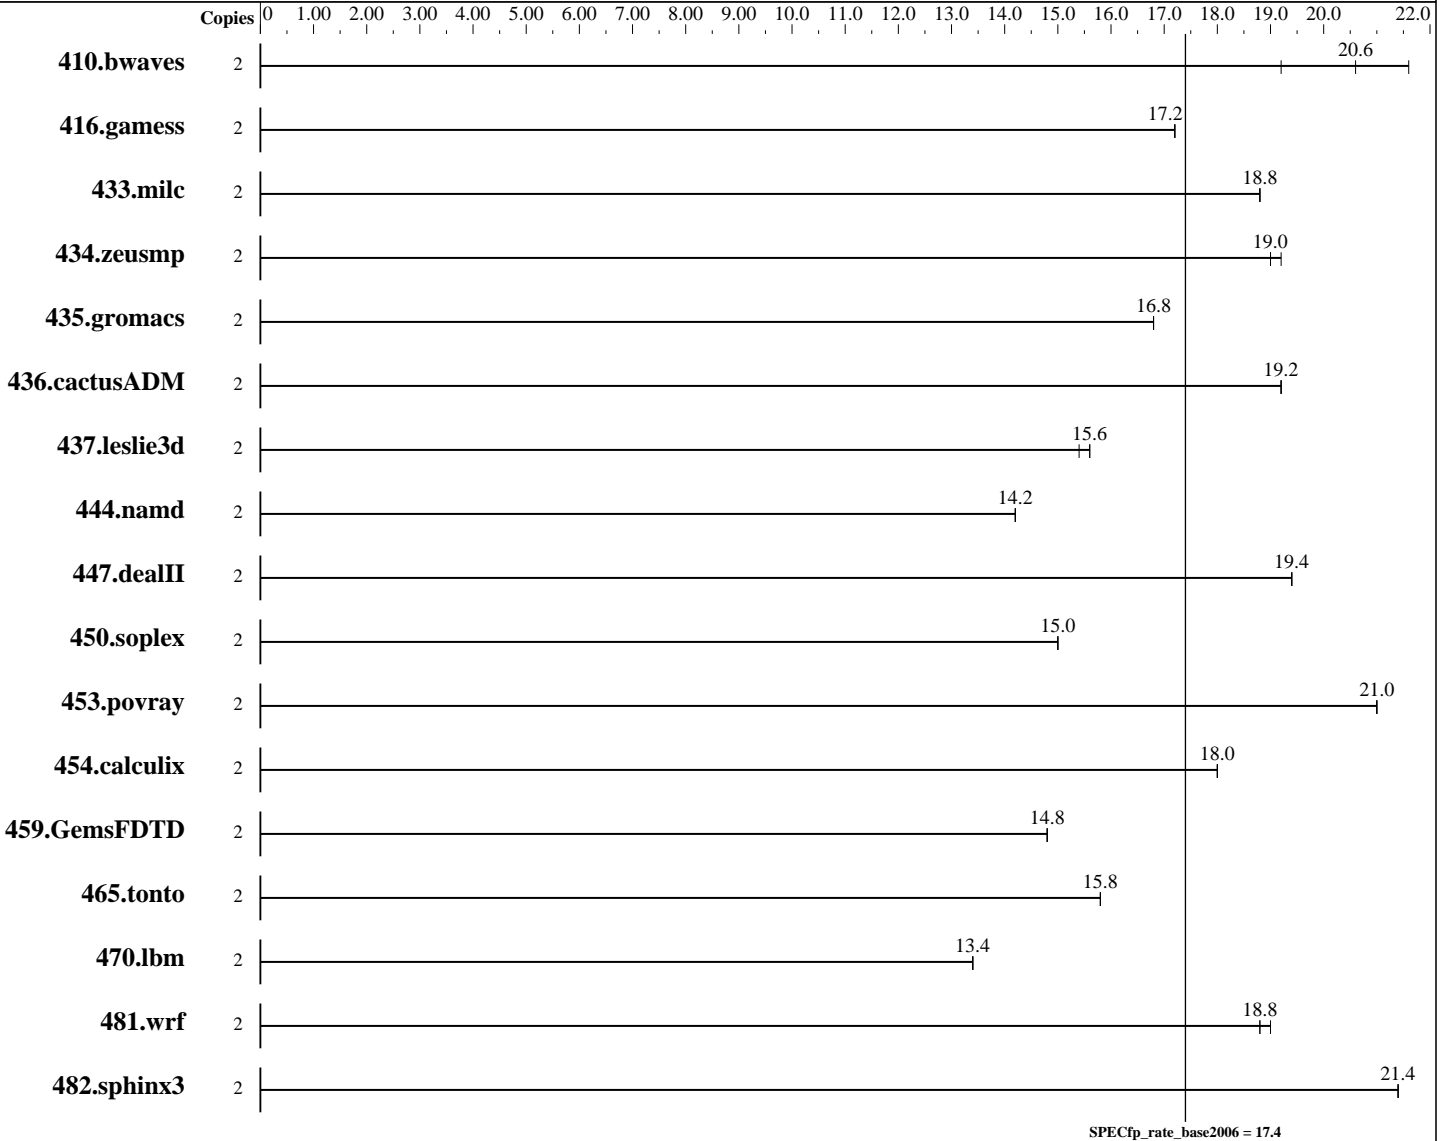

Hardware

CPU Name: Intel Core 2 Duo SU9400
 CPU Characteristics:
 CPU MHz: 1400
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 3 MB I+D on chip per chip

Continued on next page

Software

Operating System: Windows Vista Home Premium w/ SP1 (32-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Intel Visual Fortran Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cprof_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: No
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = Not Run

Acer Aspire 3810T (Intel Core 2 Duo SU9400)

SPECfp_rate_base2006 = 17.4

CPU2006 license: 13

Test date: May-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Hardware (Continued)

L3 Cache: None
Other Cache: None
Memory: 2 GB (2x1GB DDR3-1066 CL7; bios sets it to DDR2-800 CL5)
Disk Subsystem: ST9250315AS 250 GB SATA, 5400RPM
Other Hardware: None

Software (Continued)

System State: Default
Base Pointers: 32-bit
Peak Pointers: Not Applicable
Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	1421	19.2	<u>1317</u>	<u>20.6</u>	1259	21.6							
416.gamess	2	<u>2277</u>	<u>17.2</u>	2277	17.2	2277	17.2							
433.milc	2	981	18.8	976	18.8	<u>977</u>	<u>18.8</u>							
434.zeusmp	2	960	19.0	952	19.2	<u>960</u>	<u>19.0</u>							
435.gromacs	2	851	16.8	<u>851</u>	<u>16.8</u>	850	16.8							
436.cactusADM	2	1247	19.2	1243	19.2	<u>1244</u>	<u>19.2</u>							
437.leslie3d	2	1213	15.4	<u>1209</u>	<u>15.6</u>	1204	15.6							
444.namd	2	1126	14.2	1125	14.2	<u>1125</u>	<u>14.2</u>							
447.dealII	2	1182	19.4	<u>1184</u>	<u>19.4</u>	1185	19.4							
450.soplex	2	1109	15.0	1107	15.0	<u>1108</u>	<u>15.0</u>							
453.povray	2	<u>505</u>	<u>21.0</u>	504	21.0	505	21.0							
454.calculix	2	913	18.0	<u>913</u>	<u>18.0</u>	914	18.0							
459.GemsFDTD	2	1428	14.8	1431	14.8	<u>1431</u>	<u>14.8</u>							
465.tonto	2	<u>1245</u>	<u>15.8</u>	1244	15.8	1249	15.8							
470.lbm	2	2062	13.4	<u>2061</u>	<u>13.4</u>	2061	13.4							
481.wrf	2	1182	19.0	1182	18.8	<u>1182</u>	<u>18.8</u>							
482.sphinx3	2	1818	21.4	<u>1817</u>	<u>21.4</u>	1815	21.4							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

The system bus runs at 800 MHz
Binaries were built on Windows Vista Ultimate (32-bit)



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = Not Run

Acer Aspire 3810T (Intel Core 2 Duo SU9400)

SPECfp_rate_base2006 = 17.4

CPU2006 license: 13

Test date: May-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Base Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

C++ benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F1000000000 shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

Benchmarks using both Fortran and C:
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.xml>



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = Not Run

Acer Aspire 3810T (Intel Core 2 Duo SU9400)

SPECfp_rate_base2006 = 17.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Fri Jul 10 17:50:09 2009 by SPEC CPU2006 PS/PDF formatter v6323.