



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®2006 = 19.8

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECfp_base2006 = 19.2

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

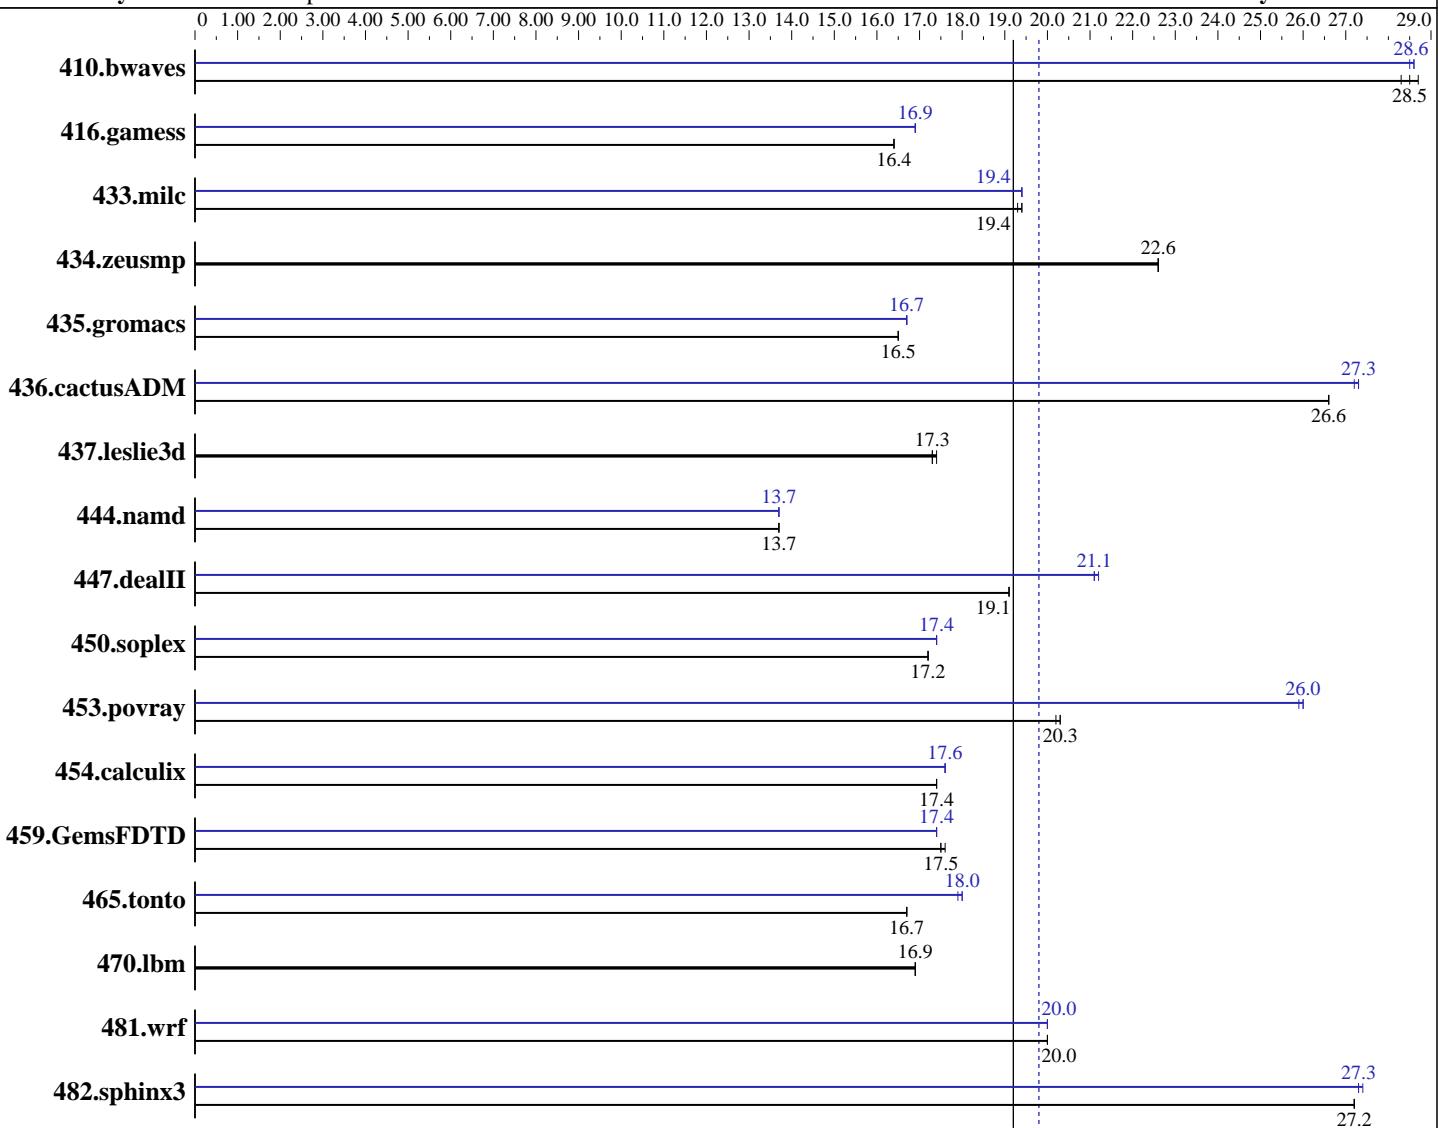

SPECfp_base2006 = 19.2

SPECfp2006 = 19.8

Hardware

CPU Name: Intel Core 2 Duo E8200
 CPU Characteristics:
 CPU MHz: 2666
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Intel Visual Fortran Compiler Professional 11.0
 for IA32
 Build 20080930 Package ID: w_cprof_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: Yes
 File System: NTFS

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECfp2006 = 19.8

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

L3 Cache: None
 Other Cache: None
 Memory: 4 GB (4x1GB DDR2-800 CL5)
 Disk Subsystem: Seagate 320 GB SATA, 7200RPM
 Other Hardware: None

System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	473	28.7	480	28.3	477	28.5	476	28.5	475	28.6	474	28.6
416.gamess	1192	16.4	1192	16.4	1192	16.4	1161	16.9	1161	16.9	1161	16.9
433.milc	473	19.4	474	19.4	475	19.3	473	19.4	473	19.4	473	19.4
434.zeusmp	403	22.6	403	22.6	403	22.6	403	22.6	403	22.6	403	22.6
435.gromacs	434	16.5	434	16.5	434	16.5	427	16.7	427	16.7	427	16.7
436.cactusADM	449	26.6	450	26.6	450	26.6	438	27.3	440	27.2	438	27.3
437.leslie3d	543	17.3	542	17.3	542	17.4	543	17.3	542	17.3	542	17.4
444.namd	584	13.7	584	13.7	584	13.7	584	13.7	584	13.7	584	13.7
447.dealII	598	19.1	598	19.1	598	19.1	541	21.1	541	21.2	541	21.1
450.soplex	485	17.2	485	17.2	485	17.2	480	17.4	479	17.4	480	17.4
453.povray	263	20.3	263	20.2	263	20.3	205	26.0	205	26.0	206	25.9
454.calculix	474	17.4	474	17.4	474	17.4	469	17.6	469	17.6	469	17.6
459.GemsFDTD	604	17.6	605	17.5	605	17.5	610	17.4	609	17.4	609	17.4
465.tonto	590	16.7	591	16.7	590	16.7	548	17.9	548	18.0	548	18.0
470.lbm	814	16.9	814	16.9	814	16.9	814	16.9	814	16.9	814	16.9
481.wrf	558	20.0	559	20.0	558	20.0	558	20.0	558	20.0	558	20.0
482.sphinx3	715	27.2	716	27.2	716	27.2	712	27.4	713	27.3	713	27.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case,
 Antec Truepower Trio power supply TP3-650
 Binaries were built on Windows Vista Ultimate (32-bit)
 Binaries were built on Windows Vista Ultimate (32-bit)
 OMP_NUM_THREADS set to number of logical processors as seen by the OS
 KMP_AFFINITY set to physical,0

Base Compiler Invocation

C benchmarks:
 icl -Qvc9 -Qc99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECfp2006 = 19.8

SPECfp_base2006 = 19.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks:

```
icl -Qvc9
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc9 -Qc99 ifort
```

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore

444.namd: -TP

447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG

453.povray: -DSPEC_CPU_WINDOWS_ICL

454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase

481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:

```
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch  
/F1000000000
```

C++ benchmarks:

```
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch  
-Qcxx-features /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch  
/F1000000000
```

Benchmarks using both Fortran and C:

```
-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch  
/F1000000000
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qc99
```

C++ benchmarks:

```
icl -Qvc9
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation	SPECfp2006 =	19.8
Intel DQ45CB motherboard (Intel Core 2 Duo E8200)	SPECfp_base2006 =	19.2
CPU2006 license: 13	Test date:	Apr-2009
Test sponsor: Intel Corporation	Hardware Availability:	May-2009
Tested by: Intel Corporation	Software Availability:	Nov-2008

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Peak Portability Flags

```
436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Oa /F1000000000
470.lbm: basepeak = yes
482.sphinx3: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000
```

C++ benchmarks:

```
444.namd: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib
           -link /FORCE:MULTIPLE
447.dealII: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch
           -Qansi-alias -Qscalar-rep- /F1000000000 shlw32m.lib
           -link /FORCE:MULTIPLE
450.soplex: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib
           -link /FORCE:MULTIPLE
453.povray: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000
           shlw32m.lib -link /FORCE:MULTIPLE
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation	SPECfp2006 =	19.8
Intel DQ45CB motherboard (Intel Core 2 Duo E8200)	SPECfp_base2006 =	19.2
CPU2006 license: 13	Test date:	Apr-2009
Test sponsor: Intel Corporation	Hardware Availability:	May-2009
Tested by: Intel Corporation	Software Availability:	Nov-2008

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
410.bwaves: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel  
/F1000000000  
  
416.gamess: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll12 -Ob0 -Qansi-alias  
-Qscalar-rep- /F1000000000  
  
434.zeusmp: basepeak = yes  
  
437.leslie3d: basepeak = yes  
  
459.GemsFDTD: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll12 -Ob0 -Qopt-prefetch  
-Qparallel /F1000000000  
  
465.tonto: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll14 -Qauto /F1000000000
```

Benchmarks using both Fortran and C:

```
435.gromacs: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000  
  
436.cactusADM: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll12 -Qopt-prefetch -Qparallel  
/F1000000000  
  
454.calculix: -QxSSE4.1 -Qipo -O3 -Qprec-div- /F1000000000  
  
481.wrf: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel  
/F1000000000
```

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 19.8

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECfp_base2006 = 19.2

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 01:05:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.