



SPEC[®] CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp[®]_rate2006 = 158

ACTINA SOLAR 710 S4 (Intel Xeon E5520)

SPECfp_rate_base2006 = 153

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jul-2009

Hardware Availability: Jun-2009

Software Availability: Feb-2009

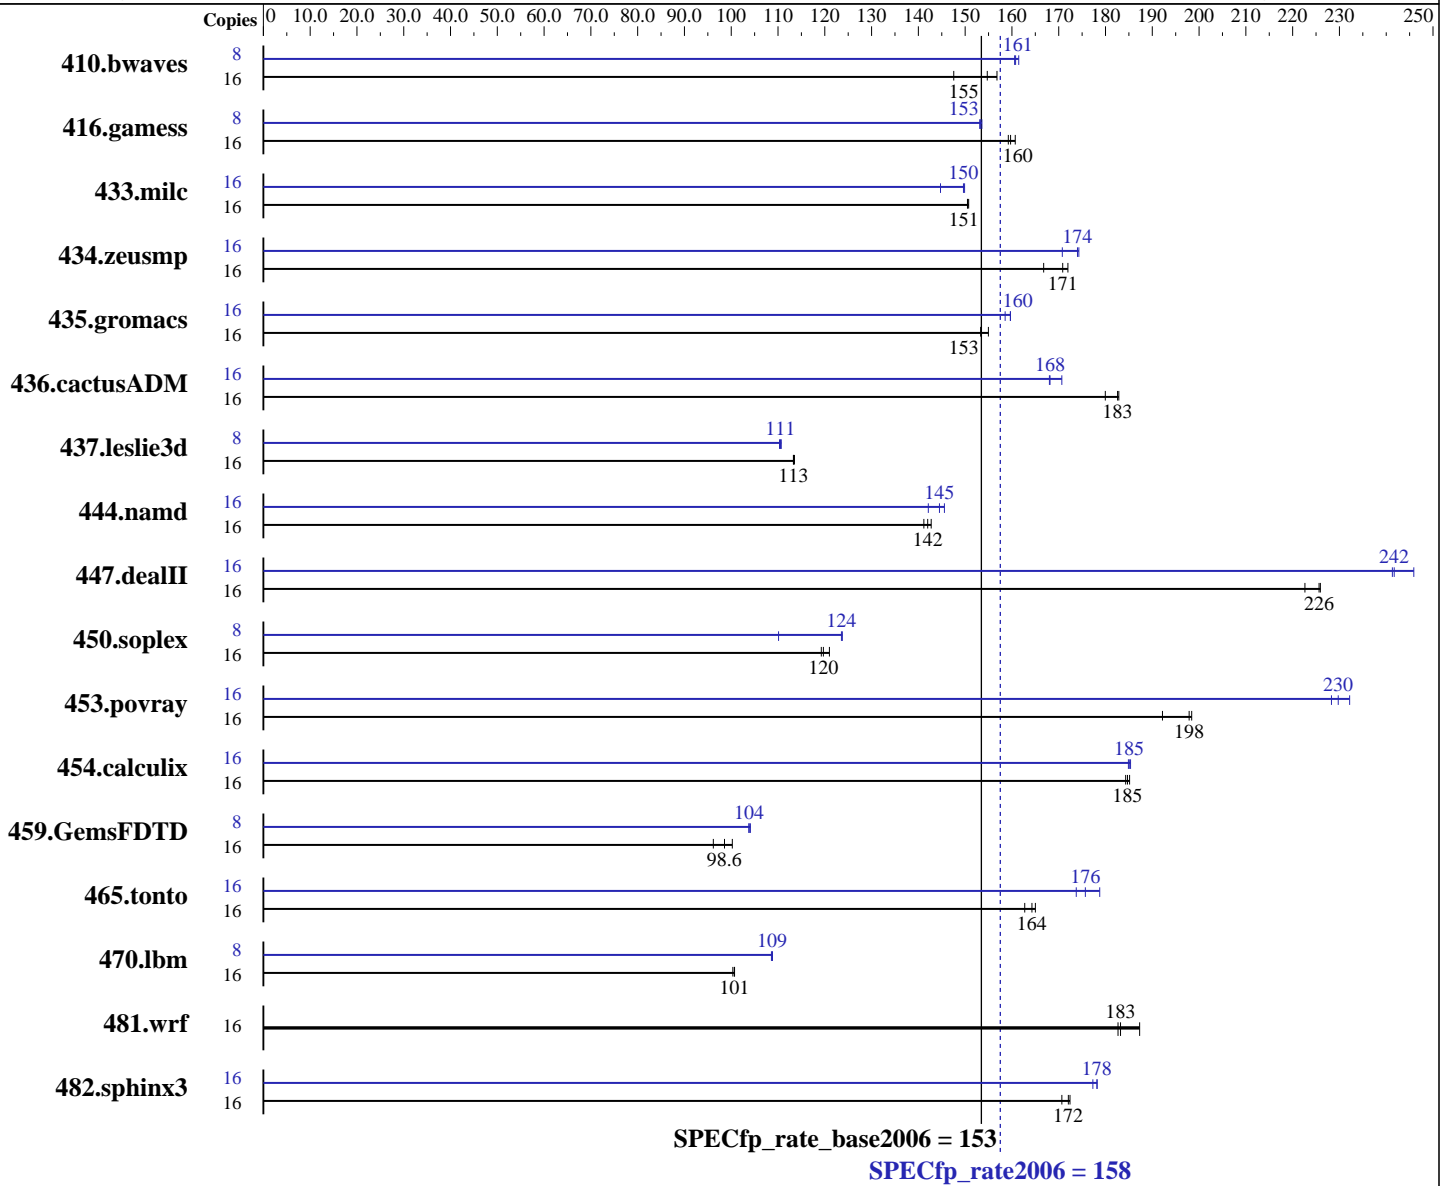

Hardware

CPU Name: Intel Xeon E5520
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSe Linux Enterprise Server 10 (x86_64) with SP2, kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066, l_fproc_p_11.0.066
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 158

ACTINA SOLAR 710 S4 (Intel Xeon E5520)

SPECfp_rate_base2006 = 153

CPU2006 license: 9008

Test date: Jul-2009

Test sponsor: ACTION S.A.

Hardware Availability: Jun-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Hardware (Continued)

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB PC3-8500, 1066 MHz, DDR3, ECC)
Disk Subsystem: 147 GB SAS, 10000 RPM
Other Hardware: None

Software (Continued)

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	1474	148	1387	157	1405	155	8	677	161	673	161	676	161		
416.gamess	16	1949	161	1962	160	1968	159	8	1020	154	1023	153	1022	153		
433.milc	16	974	151	976	151	976	150	16	982	150	1015	145	980	150		
434.zeusmp	16	873	167	852	171	847	172	16	835	174	837	174	853	171		
435.gromacs	16	745	153	737	155	745	153	16	716	160	715	160	721	159		
436.cactusADM	16	1046	183	1047	183	1062	180	16	1138	168	1120	171	1137	168		
437.leslie3d	16	1327	113	1325	114	1328	113	8	679	111	682	110	680	111		
444.namd	16	899	143	904	142	909	141	16	882	146	888	145	903	142		
447.dealII	16	822	223	811	226	810	226	16	757	242	759	241	744	246		
450.soplex	16	1119	119	1115	120	1103	121	8	606	110	539	124	540	124		
453.povray	16	443	192	429	198	430	198	16	373	228	370	230	367	232		
454.calculix	16	713	185	716	184	715	185	16	712	185	713	185	714	185		
459.GemsFDTD	16	1765	96.2	1722	98.6	1694	100	8	815	104	817	104	818	104		
465.tonto	16	954	165	958	164	967	163	16	881	179	896	176	906	174		
470.lbm	16	2191	100	2184	101	2183	101	8	1010	109	1011	109	1012	109		
481.wrf	16	954	187	975	183	978	183	16	954	187	975	183	978	183		
482.sphinx3	16	1827	171	1809	172	1812	172	16	1759	177	1750	178	1750	178		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

'numactl' was used to bind copies to the cores
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 158

ACTINA SOLAR 710 S4 (Intel Xeon E5520)

SPECfp_rate_base2006 = 153

CPU2006 license: 9008

Test date: Jul-2009

Test sponsor: ACTION S.A.

Hardware Availability: Jun-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 158

ACTINA SOLAR 710 S4 (Intel Xeon E5520)

SPECfp_rate_base2006 = 153

CPU2006 license: 9008

Test date: Jul-2009

Test sponsor: ACTION S.A.

Hardware Availability: Jun-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 158

ACTINA SOLAR 710 S4 (Intel Xeon E5520)

SPECfp_rate_base2006 = 153

CPU2006 license: 9008

Test date: Jul-2009

Test sponsor: ACTION S.A.

Hardware Availability: Jun-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 158

ACTINA SOLAR 710 S4 (Intel Xeon E5520)

SPECfp_rate_base2006 = 153

CPU2006 license: 9008

Test date: Jul-2009

Test sponsor: ACTION S.A.

Hardware Availability: Jun-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Aug 18 15:45:11 2009 by SPEC CPU2006 PS/PDF formatter v6323.