



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B120a  
(Intel Xeon X5570)

**SPECfp®2006 = 40.0**

**SPECfp\_base2006 = 37.6**

CPU2006 license: 9006


Test date: Aug-2009

Test sponsor: NEC Corporation

Hardware Availability: Jul-2009

Tested by: NEC Corporation

Software Availability: Feb-2009

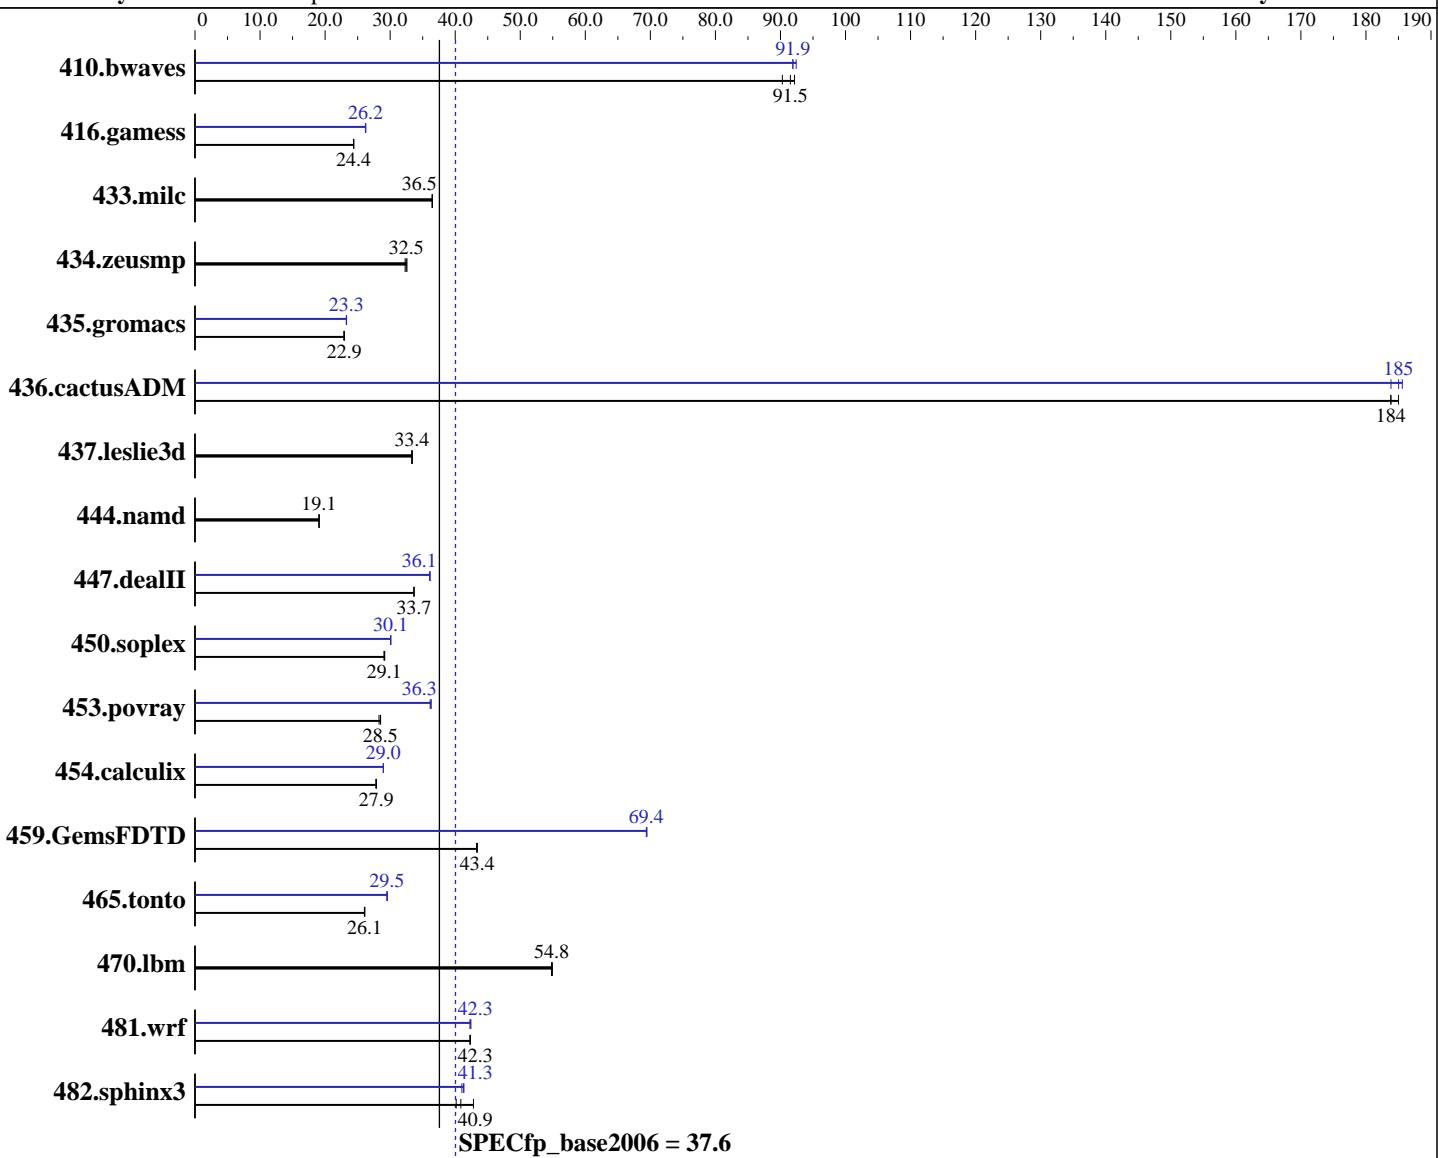

### Hardware

CPU Name: Intel Xeon X5570  
CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
CPU MHz: 2933  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64)  
SP2 with patch Linux kernel 20090119,  
Kernel 2.6.16.60-0.34-smp  
Compiler: Intel C++ and Fortran Compiler Professional 11.0  
for Linux  
Build 20090131 Package ID: l\_cproc\_p\_11.0.081,  
l\_cprof\_p\_11.0.081  
Auto Parallel: Yes  
File System: ReiserFS

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B120a  
(Intel Xeon X5570)

**SPECfp2006 =** 40.0

**SPECfp\_base2006 =** 37.6

**CPU2006 license:** 9006

**Test date:** Aug-2009

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jul-2009

**Tested by:** NEC Corporation

**Software Availability:** Feb-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 12 GB (6 X 2 GB PC3-10600E, 2 rank, CL9, ECC)  
Disk Subsystem: 1x80 GB SATA2, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	151	90.3	147	92.2	<b>148</b>	<b>91.5</b>	<b>148</b>	<b>91.9</b>	147	92.4	148	91.9
416.gamess	803	24.4	<b>803</b>	<b>24.4</b>	803	24.4	<b>747</b>	<b>26.2</b>	747	26.2	746	26.2
433.milc	252	36.5	252	36.5	<b>252</b>	<b>36.5</b>	252	36.5	252	36.5	<b>252</b>	<b>36.5</b>
434.zeusmp	279	32.6	<b>280</b>	<b>32.5</b>	282	32.3	<b>279</b>	<b>32.6</b>	<b>280</b>	<b>32.5</b>	282	32.3
435.gromacs	<b>311</b>	<b>22.9</b>	312	22.9	311	23.0	306	23.3	<b>307</b>	<b>23.3</b>	307	23.3
436.cactusADM	64.6	185	65.0	184	<b>65.0</b>	<b>184</b>	65.0	184	<b>64.6</b>	<b>185</b>	64.4	186
437.leslie3d	<b>282</b>	<b>33.4</b>	281	33.4	282	33.3	<b>282</b>	<b>33.4</b>	281	33.4	282	33.3
444.namd	420	19.1	<b>421</b>	<b>19.1</b>	421	19.1	420	19.1	<b>421</b>	<b>19.1</b>	421	19.1
447.dealII	<b>340</b>	<b>33.7</b>	340	33.7	340	33.7	<b>317</b>	<b>36.1</b>	317	36.1	317	36.1
450.soplex	286	29.2	<b>287</b>	<b>29.1</b>	287	29.1	<b>277</b>	<b>30.1</b>	277	30.1	277	30.1
453.povray	186	28.5	188	28.3	<b>187</b>	<b>28.5</b>	147	36.3	147	36.1	<b>147</b>	<b>36.3</b>
454.calculix	297	27.8	<b>296</b>	<b>27.9</b>	296	27.9	<b>285</b>	28.9	<b>285</b>	<b>29.0</b>	285	29.0
459.GemsFDTD	245	43.3	245	43.4	<b>245</b>	<b>43.4</b>	153	69.5	<b>153</b>	<b>69.4</b>	153	69.4
465.tonto	<b>377</b>	<b>26.1</b>	377	26.1	378	26.0	<b>333</b>	29.6	333	29.5	<b>333</b>	<b>29.5</b>
470.lbm	<b>251</b>	<b>54.8</b>	251	54.8	250	54.9	<b>251</b>	<b>54.8</b>	251	54.8	250	54.9
481.wrf	<b>264</b>	<b>42.3</b>	264	42.3	264	42.2	<b>264</b>	<b>42.3</b>	263	42.4	264	42.3
482.sphinx3	<b>477</b>	<b>40.9</b>	455	42.8	485	40.1	<b>471</b>	<b>41.3</b>	<b>472</b>	<b>41.3</b>	475	41.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M

## Platform Notes

BIOS setting:  
NUMA configuration : Enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B120a  
(Intel Xeon X5570)

**SPECfp2006 =** 40.0

**SPECfp\_base2006 =** 37.6

**CPU2006 license:** 9006

**Test date:** Aug-2009

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jul-2009

**Tested by:** NEC Corporation

**Software Availability:** Feb-2009

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B120a  
(Intel Xeon X5570)

**SPECfp2006 =** 40.0

**SPECfp\_base2006 =** 37.6

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Aug-2009

**Hardware Availability:** Jul-2009

**Software Availability:** Feb-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xsse4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B120a  
(Intel Xeon X5570)

**SPECfp2006 =** 40.0

**SPECfp\_base2006 =** 37.6

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Aug-2009

**Hardware Availability:** Jul-2009

**Software Availability:** Feb-2009

## Peak Optimization Flags (Continued)

444.namd: basepeak = yes

```
447.dealII: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll2 -ansi-alias -scalar-rep -opt-prefetch
```

```
450.soplex: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -opt-malloc-options=3
```

```
453.povray: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xsSE4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch
             -parallel
```

```
416.gamess: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -unroll2 -Ob0 -ansi-alias -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                 -unroll2 -Ob0 -opt-prefetch -parallel
```

```
465.tonto: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -unroll4 -auto
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
               -opt-prefetch -auto-ilp32
```

```
436.cactusADM: -xsSE4 .2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                  -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                  -unroll2 -opt-prefetch -parallel -auto-ilp32
```

454.calculix: -xsSE4 .2 -ipo -O3 -no-prec-div -static -auto-ilp32

```
481.wrf: -xsSE4 .2 -ipo -O3 -no-prec-div -static -opt-prefetch
            -parallel -auto-ilp32
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B120a  
(Intel Xeon X5570)

**SPECfp2006 =** 40.0

**SPECfp\_base2006 =** 37.6

**CPU2006 license:** 9006

**Test date:** Aug-2009

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jul-2009

**Tested by:** NEC Corporation

**Software Availability:** Feb-2009

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 02:57:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 September 2009.