SPEC® CINT2006 Result

IBM Corporation

SPECint®_rate2006 = 652

IBM Power 780 (3.86 GHz, 16 core)

SPECint_rate_base2006 = 586

CPU2006 license:	11	**Test date:**	Jan-2010
Test sponsor:	IBM Corporation	**Hardware Availability:**	Mar-2010
Tested by:	IBM Corporation	**Software Availability:**	Mar-2010

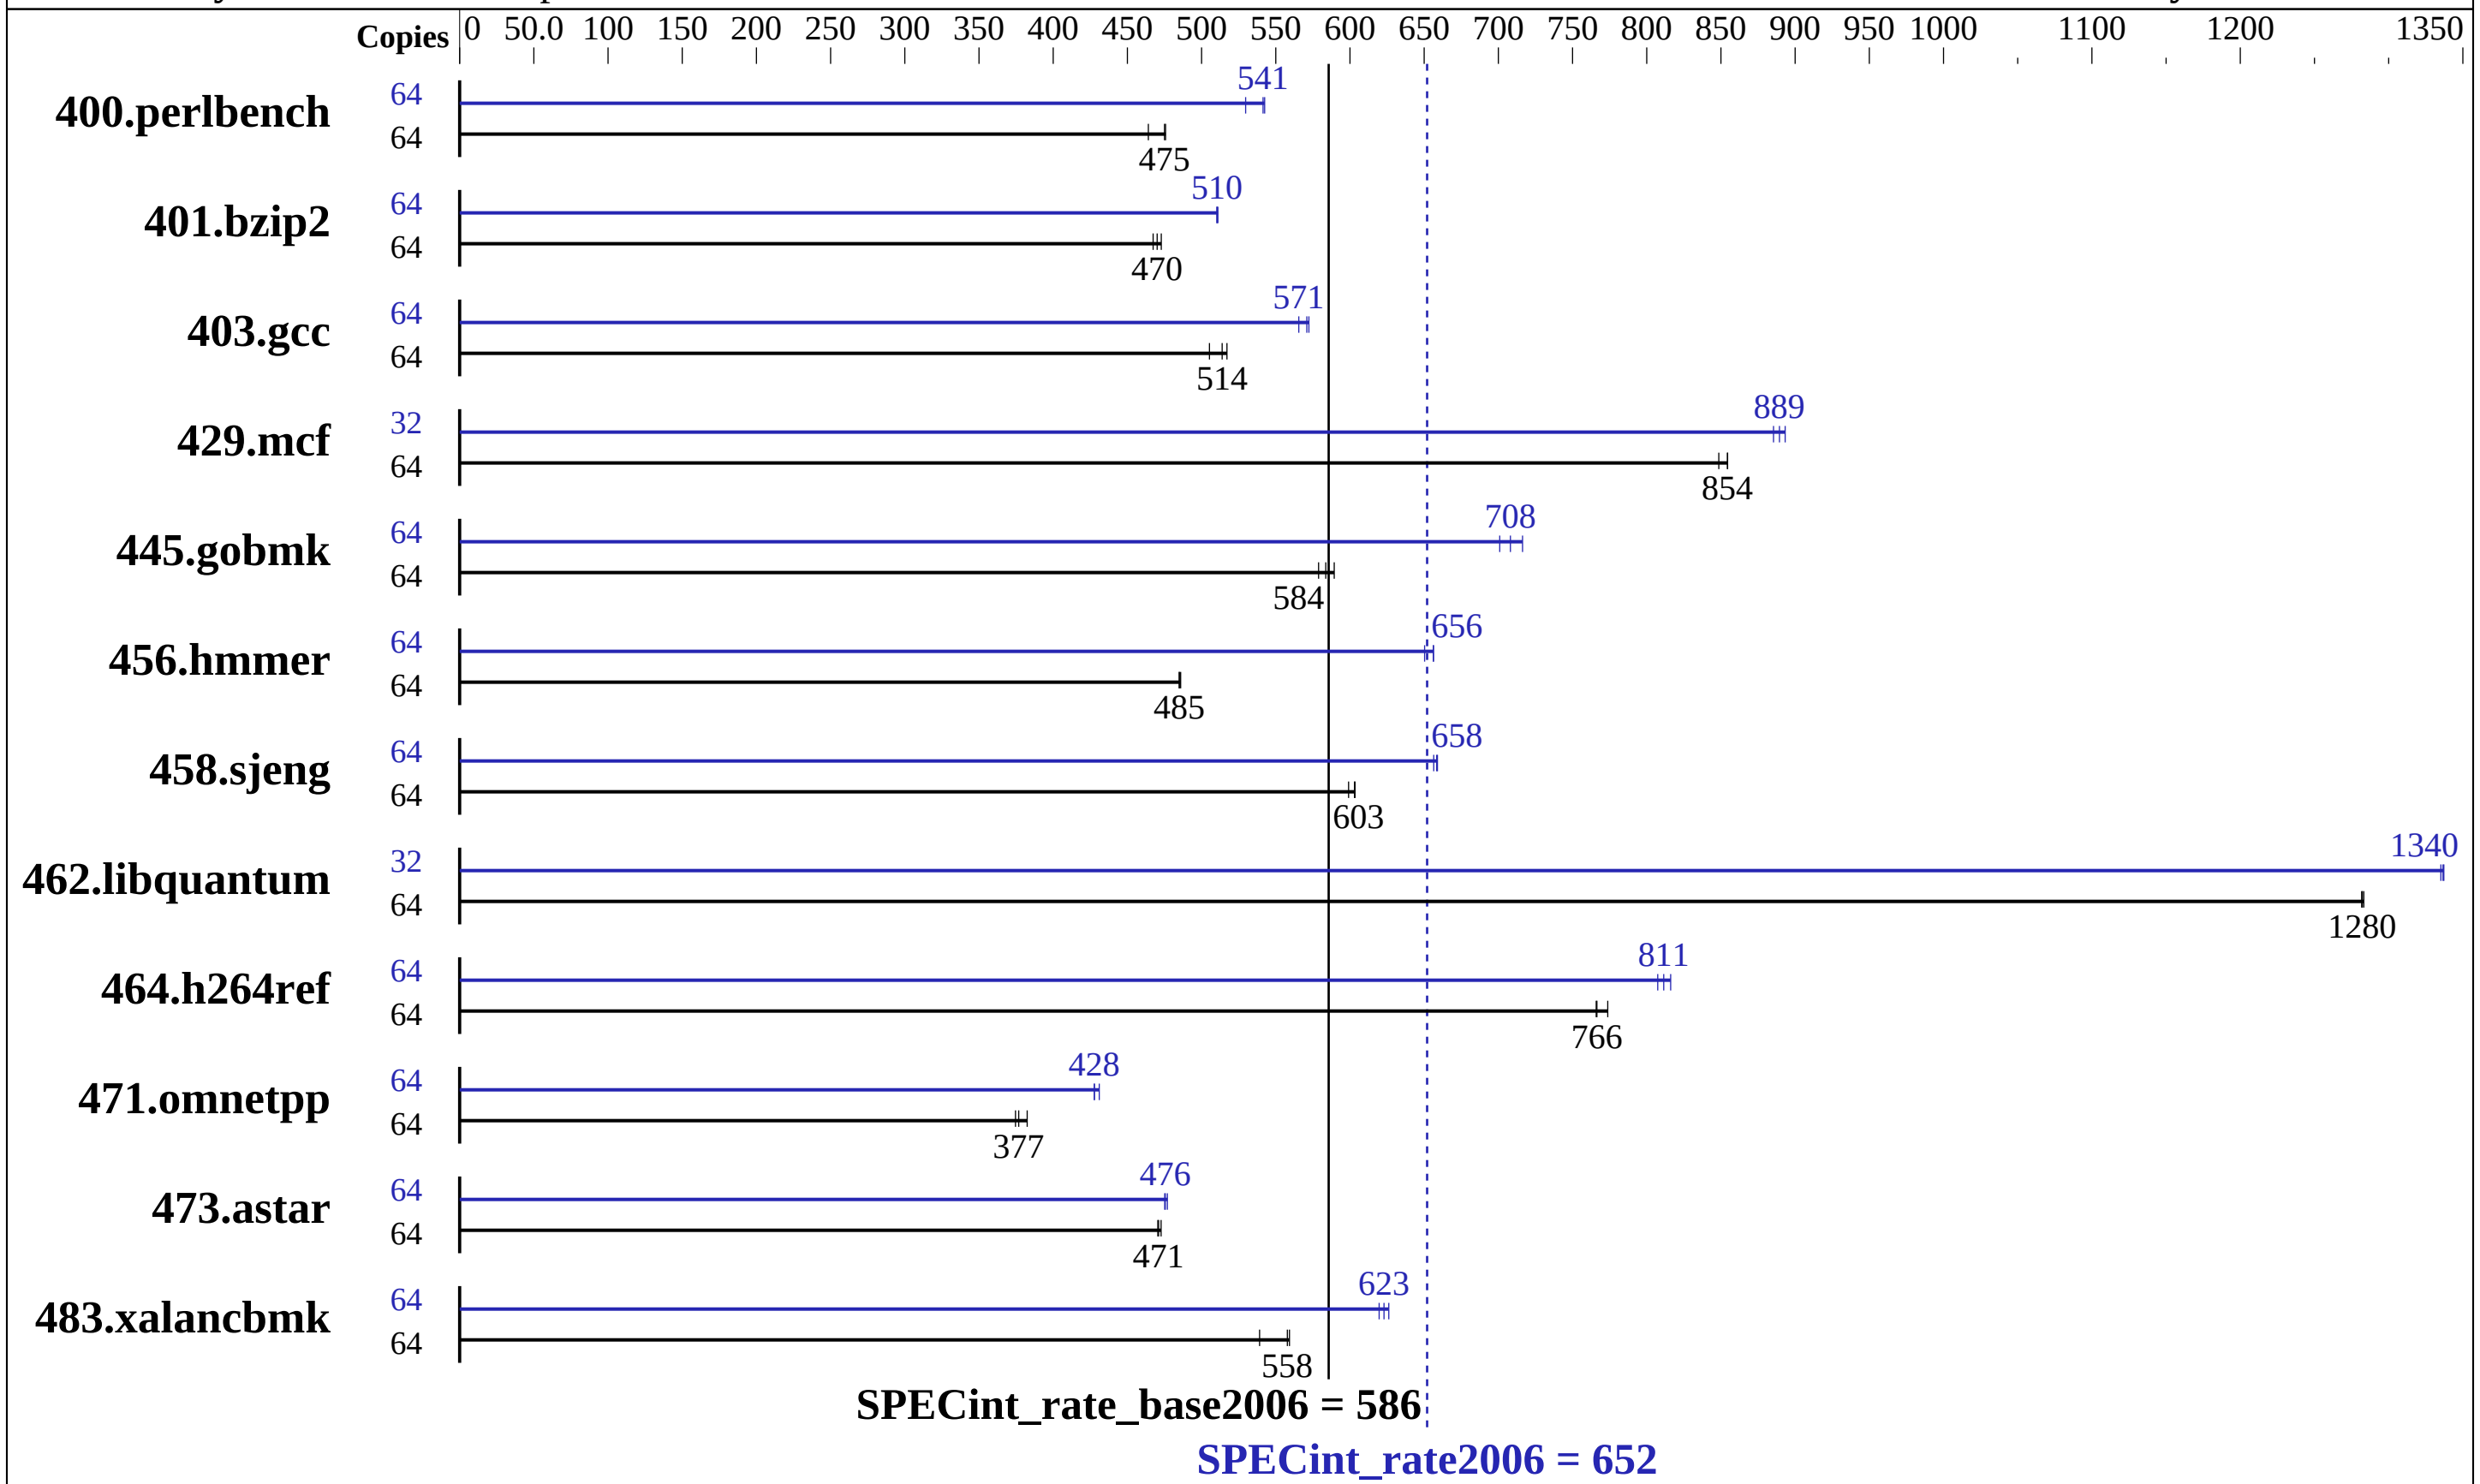

Hardware

CPU Name:	POWER7
CPU Characteristics:	Intelligent Energy Optimization enabled, up to 3.94 GHz
CPU MHz:	3860
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 4 threads/core
CPU(s) orderable:	8,16,24,32,48,64 cores
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per core
Other Cache:	None
Memory:	128 GB (16x8 GB) DDR3 1066 MHz
Disk Subsystem:	6x146.8 GB SAS SFF 15K RPM
Other Hardware:	None

Software

Operating System:	IBM AIX V6.1 with the 6100-04 Technology Level and Service Pack 3
Compiler:	XL C/C++ Enterprise Edition V10.1.0.5 for AIX
Auto Parallel:	No
File System:	AIX/JFS2
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1314	476	**1316**	**475**	1347	464	64	1180	530	**1155**	**541**	1153	543
401.bzip2	64	**1314**	**470**	1306	473	1322	467	64	1209	511	1210	510	**1210**	**510**
403.gcc	64	996	517	**1003**	**514**	1020	505	64	**902**	**571**	911	566	900	572
429.mcf	64	**683**	**854**	683	854	688	849	32	327	893	**328**	**889**	330	885
445.gobmk	64	1160	579	**1150**	**584**	1139	589	64	958	701	**948**	**708**	937	716
456.hmmer	64	**1231**	**485**	1231	485	1229	486	64	918	650	910	656	**910**	**656**
458.sjeng	64	1283	603	**1284**	**603**	1293	599	64	**1176**	**658**	1175	659	1180	656
462.libquantum	64	**1034**	**1280**	1035	1280	1033	1280	32	496	1340	497	1340	**496**	**1340**
464.h264ref	64	**1848**	**766**	1831	774	1849	766	64	1754	807	1735	816	**1745**	**811**
471.omnetpp	64	**1062**	**377**	1046	382	1068	375	64	**935**	**428**	935	428	928	431
473.astar	64	**954**	**471**	955	470	950	473	64	946	475	942	477	**945**	**476**
483.xalancbmk	64	**792**	**558**	790	559	819	539	64	705	626	713	620	**709**	**623**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

```
fdpr binary optimization tool used for 400.perlbench
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 401.bzip2
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 403.gcc
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 429.mcf
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 445.gobmk
 with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 456.hmmer
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 458.sjeng
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 462.libquantum
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 464.h264ref
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 471.omnetpp
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 473.astar
 with options -O4 -vrox -pbsi
```

Submit Notes

```
The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).
```

Operating System Notes

```
all ulimits set to unlimited.
6400 16M large pages defined with vmo command
```

General Notes

```
Environment variables set by runspec before the start of the run:
MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLFRTEOPTS = "intrinthds=1"

 See the flags file for details on settings.
```

Base Compiler Invocation

C benchmarks:
`/usr/vac/bin/xlc -qlanglvl=extc99`

C++ benchmarks:
`/usr/vacpp/bin/xlC`

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:
`-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qalias=noansi -qalloca -blpdata`

C++ benchmarks:
`-bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all -D__IBM_FAST_SET_MAP_ITERATOR -blpdata`

Base Other Flags

C benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:
/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:
/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qalias=noansi -qfdpr -blpdata -btextpsize:64K

401.bzip2: -bmaxdata:0x4ffffffc -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qfdpr -blpdata

403.gcc: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -D_ILS_MACROS -qalloca -qfdpr -blpdata

429.mcf: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qfdpr -blpdata

445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage -D_ILS_MACROS -qfdpr -blpdata

456.hmmer: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qenablevmx -qvecnvol -D_ILS_MACROS -qfdpr -blpdata -btextpsize:64K

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qfdpr -blpdata

462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -q64 -D_ILS_MACROS -qfdpr -blpdata

464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qfdpr -blpdata -btextpsize:64K

C++ benchmarks:

471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qfdpr -qalign=natural -qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K

473.astar: -bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qfdpr -qenablevmx -qvecnvol -qinlglue -qalign=natural -blpdata

483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qfdpr -qinlglue -D__IBM_FAST_VECTOR -blpdata -btextpsize:64K

Peak Other Flags

C benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/IBM-XL.20100303.html
http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/IBM-XL.20100303.xml
http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml

IBM Corporation

IBM Power 780 (3.86 GHz, 16 core)

SPECint_rate2006 = 652

SPECint_rate_base2006 = 586

CPU2006 license:	11	**Test date:**	Jan-2010
Test sponsor:	IBM Corporation	**Hardware Availability:**	Mar-2010
Tested by:	IBM Corporation	**Software Availability:**	Mar-2010

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:06:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 March 2010.