SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte GA-X58A-UD7 motherboard (Intel Core i7-980X)

SPECfp®2006 = 38.4

SPECfp_base2006 = 36.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2010
Hardware Availability: Mar-2010
Software Availability: Oct-2009

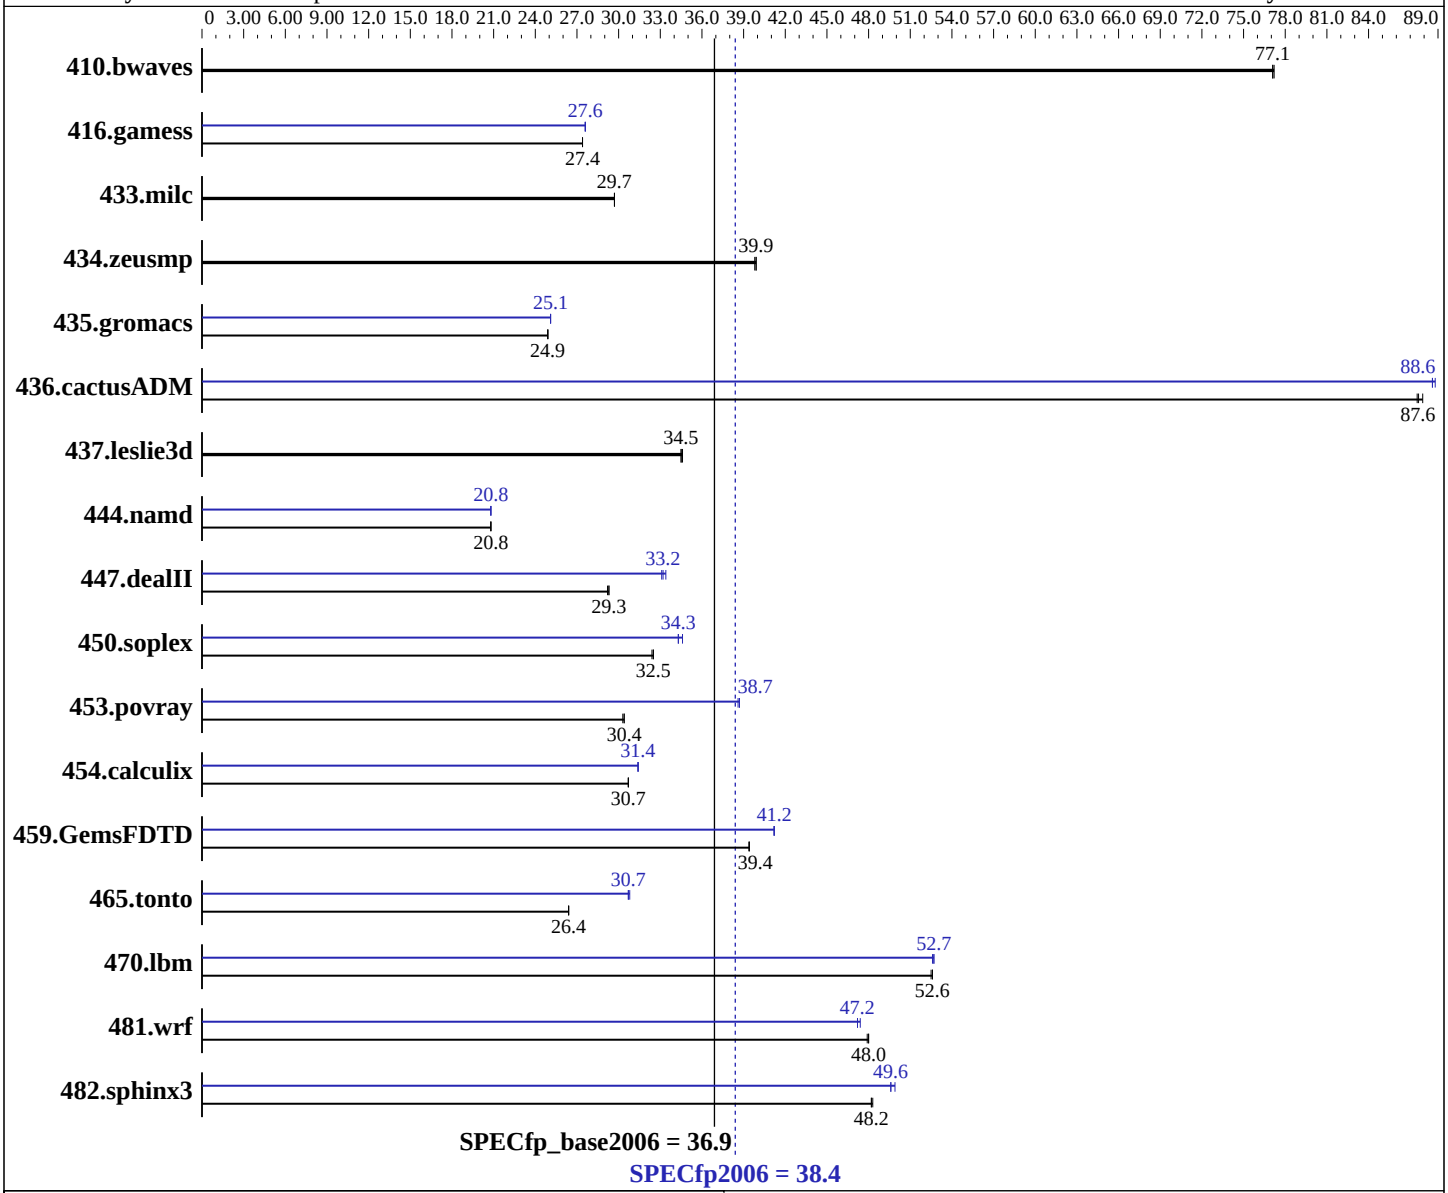

Hardware

CPU Name:	Intel Core i7-980X
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	6 cores, 1 chip, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Windows 7 Ultimate (64-bit)
Compiler:	Intel C++ Compiler Professional 11.1 for Intel 64 Build 20090903 Package ID: w_cproc_p_11.1.045 Intel Visual Fortran Compiler Professional 11.1 for Intel 64 Build 20090903 Package ID: w_cproc_p_11.1.045, w_cprof_p_11.1.045 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	Yes

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte GA-X58A-UD7 motherboard (Intel Core i7-980X)

SPECfp2006 = 38.4

SPECfp_base2006 = 36.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2010
Hardware Availability: Mar-2010
Software Availability: Oct-2009

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 12 GB (6x2GB Micron 16JTF25664AY-1G1D1 DDR3-1066 CL7)
Disk Subsystem: Intel X25-M 160GB SSD
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None
SmartHeap Library Version 8.1 from http://www.microquill.com/

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	176	77.2	176	77.1	**176**	**77.1**	176	77.2	176	77.1	**176**	**77.1**
416.gamess	**715**	**27.4**	715	27.4	715	27.4	709	27.6	709	27.6	**709**	**27.6**
433.milc	309	29.7	309	29.7	**309**	**29.7**	309	29.7	309	29.7	**309**	**29.7**
434.zeusmp	228	39.9	**228**	**39.9**	229	39.8	228	39.9	**228**	**39.9**	229	39.8
435.gromacs	**287**	**24.9**	287	24.9	287	24.9	285	25.1	**285**	**25.1**	285	25.1
436.cactusADM	136	87.9	**136**	**87.6**	137	87.5	**135**	**88.6**	135	88.8	135	88.6
437.leslie3d	272	34.5	**272**	**34.5**	272	34.6	272	34.5	**272**	**34.5**	272	34.6
444.namd	385	20.8	**385**	**20.8**	385	20.8	386	20.8	**386**	**20.8**	386	20.8
447.dealII	**391**	**29.3**	392	29.2	390	29.3	345	33.1	343	33.4	**344**	**33.2**
450.soplex	257	32.4	**257**	**32.5**	256	32.5	**243**	**34.3**	241	34.6	243	34.3
453.povray	175	30.4	176	30.3	**175**	**30.4**	138	38.6	**138**	**38.7**	137	38.7
454.calculix	268	30.7	**268**	**30.7**	268	30.7	**263**	**31.4**	262	31.4	263	31.4
459.GemsFDTD	269	39.4	269	39.4	**269**	**39.4**	**258**	**41.2**	258	41.2	258	41.2
465.tonto	373	26.4	373	26.4	**373**	**26.4**	**320**	**30.7**	319	30.8	320	30.7
470.lbm	262	52.5	261	52.6	**261**	**52.6**	261	52.7	261	52.6	**261**	**52.7**
481.wrf	233	48.0	233	47.9	**233**	**48.0**	**237**	**47.2**	236	47.4	237	47.2
482.sphinx3	404	48.2	**404**	**48.2**	403	48.3	391	49.9	**393**	**49.6**	393	49.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icl -Qvc9

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 /Qlowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -Qlowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -Qlowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qauto-ilp32 /F1000000000

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qauto-ilp32 /F1000000000

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc9
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc9 -Qstd=c99 ifort
```

Peak Portability Flags

```
Same as Base Portability Flags
```

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qansi-alias -Qparallel -Qauto-ilp32 /F1000000000`

482.sphinx3: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll2 -Qauto-ilp32 /F1000000000`

C++ benchmarks:

444.namd: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

447.dealII: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qansi-alias -Qscalar-rep- -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

450.soplex: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

453.povray: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel /F1000000000

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000

436.cactusADM: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qunroll2 -Qauto-ilp32 /F1000000000

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F1000000000

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 05:43:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 March 2010.