



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

SPECfp®2006 = 40.3

## Acer AT350 F1 (Intel Xeon X5570)

SPECfp\_base2006 = 38.4

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jan-2010

Hardware Availability: Jan-2010

Software Availability: Sep-2009

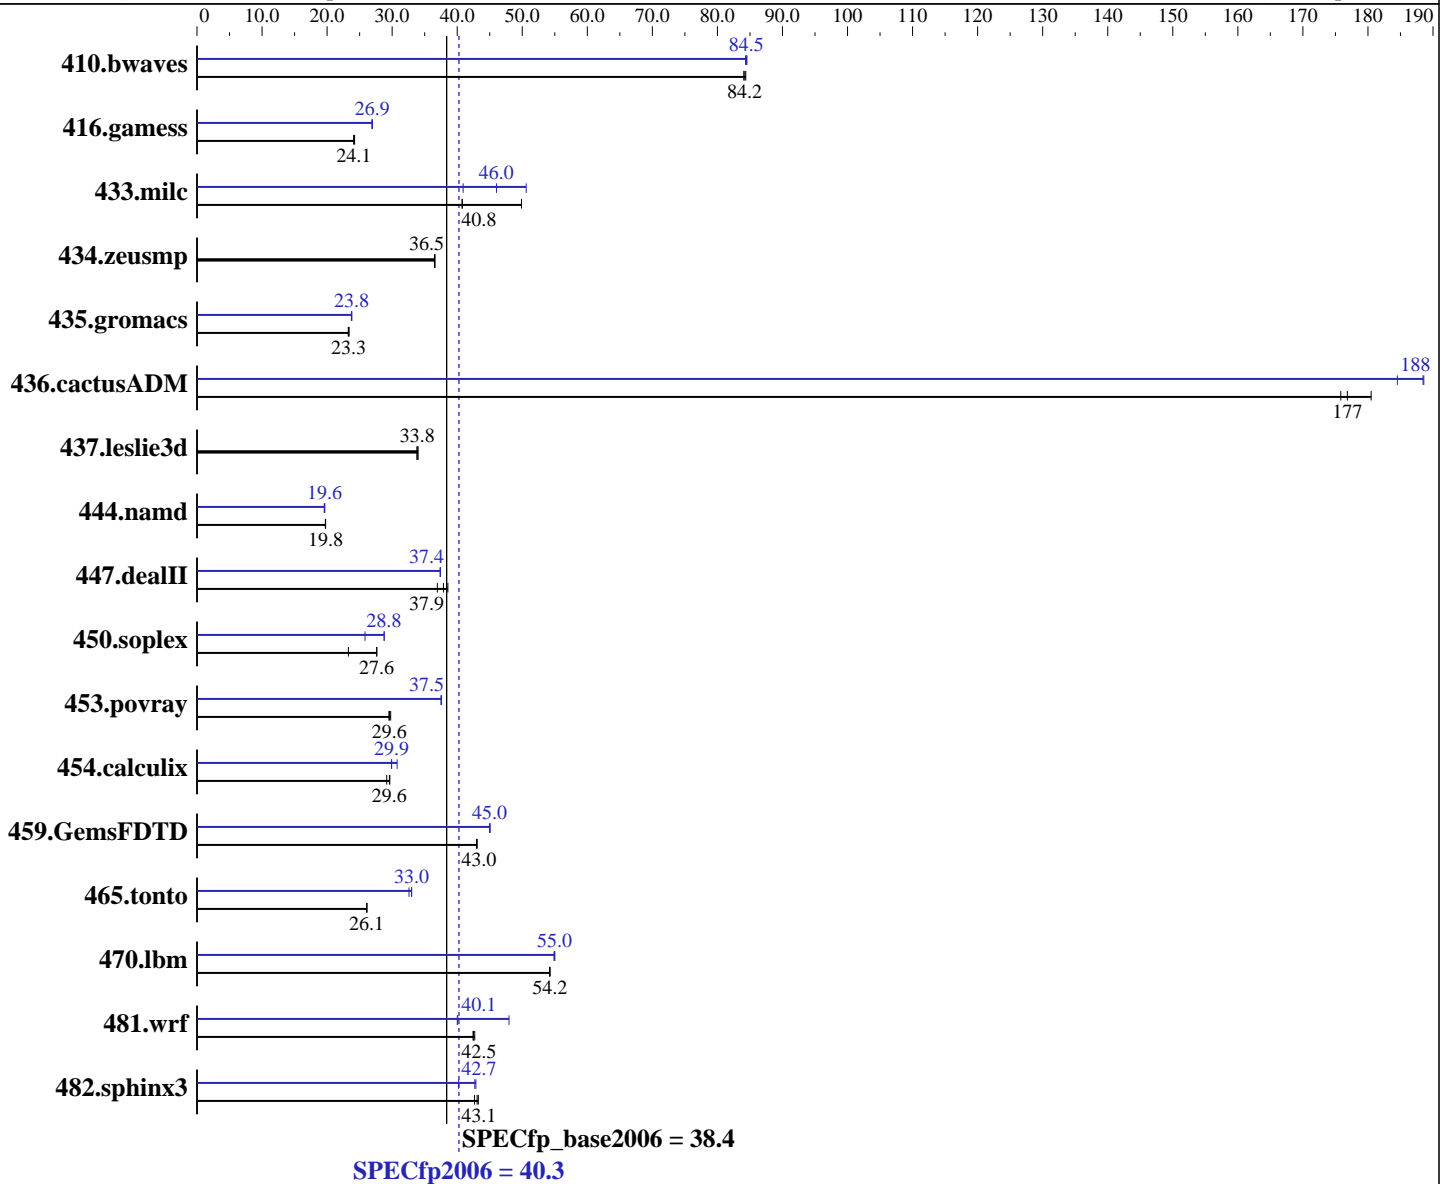

### Hardware

CPU Name: Intel Xeon X5570  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091012 Package ID: l\_cproc\_p\_11.1.059, l\_cprof\_p\_11.1.059  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 40.3

Acer AT350 F1 (Intel Xeon X5570)

SPECfp\_base2006 = 38.4

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jan-2010

Hardware Availability: Jan-2010

Software Availability: Sep-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 24 GB (6 x 4GB DDR3-1333 RDIMM)  
Disk Subsystem: 500 GB SATA II, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	162	84.0	<b>161</b>	<b>84.2</b>	161	84.4	161	84.3	161	84.5	<b>161</b>	<b>84.5</b>
416.gamess	<b>811</b>	<b>24.1</b>	808	24.2	813	24.1	726	27.0	<b>727</b>	<b>26.9</b>	728	26.9
433.milc	<b>225</b>	<b>40.8</b>	225	40.8	184	49.9	224	40.9	<b>199</b>	<b>46.0</b>	181	50.6
434.zeusmp	<b>249</b>	<b>36.5</b>	249	36.6	249	36.5	<b>249</b>	<b>36.5</b>	249	36.6	249	36.5
435.gromacs	305	23.4	307	23.3	<b>306</b>	<b>23.3</b>	300	23.8	<b>300</b>	<b>23.8</b>	301	23.7
436.cactusADM	68.0	176	<b>67.6</b>	<b>177</b>	66.2	180	<b>63.4</b>	<b>188</b>	63.4	189	64.8	185
437.leslie3d	278	33.8	277	34.0	<b>278</b>	<b>33.8</b>	278	33.8	277	34.0	<b>278</b>	<b>33.8</b>
444.namd	<b>406</b>	<b>19.8</b>	406	19.8	406	19.7	409	19.6	<b>409</b>	<b>19.6</b>	410	19.6
447.dealII	<b>302</b>	<b>37.9</b>	297	38.6	310	36.9	<b>306</b>	<b>37.4</b>	306	37.4	306	37.4
450.soplex	358	23.3	302	27.6	<b>302</b>	<b>27.6</b>	290	28.8	323	25.8	<b>290</b>	<b>28.8</b>
453.povray	<b>180</b>	<b>29.6</b>	179	29.8	180	29.5	142	37.6	142	37.5	<b>142</b>	<b>37.5</b>
454.calculix	283	29.2	<b>279</b>	<b>29.6</b>	278	29.6	276	29.9	<b>276</b>	<b>29.9</b>	268	30.8
459.GemsFDTD	247	43.0	246	43.0	<b>247</b>	<b>43.0</b>	236	45.0	235	45.1	<b>236</b>	<b>45.0</b>
465.tonto	377	26.1	377	26.1	<b>377</b>	<b>26.1</b>	302	32.6	298	33.0	<b>298</b>	<b>33.0</b>
470.lbm	<b>253</b>	<b>54.2</b>	253	54.2	253	54.2	250	55.0	<b>250</b>	<b>55.0</b>	250	54.9
481.wrf	<b>263</b>	<b>42.5</b>	262	42.7	263	42.4	279	40.0	<b>279</b>	<b>40.1</b>	233	48.0
482.sphinx3	<b>453</b>	<b>43.1</b>	451	43.3	457	42.7	485	40.2	455	42.9	<b>456</b>	<b>42.7</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was set for stacksize unlimited

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M  
This result was measured on the Gateway GT350 F1.  
The Acer AT350 F1 and Gateway GT350 F1 are electronically equivalent.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>Acer Incorporated</b>	<b>SPECfp2006 =</b>	<b>40.3</b>
<b>Acer AT350 F1 (Intel Xeon X5570)</b>	<b>SPECfp_base2006 =</b>	<b>38.4</b>

<b>CPU2006 license:</b> 97	<b>Test date:</b> Jan-2010
<b>Test sponsor:</b> Acer Incorporated	<b>Hardware Availability:</b> Jan-2010
<b>Tested by:</b> Acer Incorporated	<b>Software Availability:</b> Sep-2009

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp2006 = 40.3**

**Acer AT350 F1 (Intel Xeon X5570)**

**SPECfp\_base2006 = 38.4**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jan-2010

**Hardware Availability:** Jan-2010

**Software Availability:** Sep-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3:icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex:icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -parallel -ansi-alias -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 40.3

Acer AT350 F1 (Intel Xeon X5570)

SPECfp\_base2006 = 38.4

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jan-2010

Hardware Availability: Jan-2010

Software Availability: Sep-2009

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated	SPECfp2006 =	40.3
Acer AT350 F1 (Intel Xeon X5570)	SPECfp_base2006 =	38.4

<b>CPU2006 license:</b> 97	<b>Test date:</b> Jan-2010
<b>Test sponsor:</b> Acer Incorporated	<b>Hardware Availability:</b> Jan-2010
<b>Tested by:</b> Acer Incorporated	<b>Software Availability:</b> Sep-2009

## Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revH.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 05:41:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 March 2010.