SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M3 (Intel Xeon X5677)

SPECfp®2006 = 48.1

SPECfp_base2006 = 45.5

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

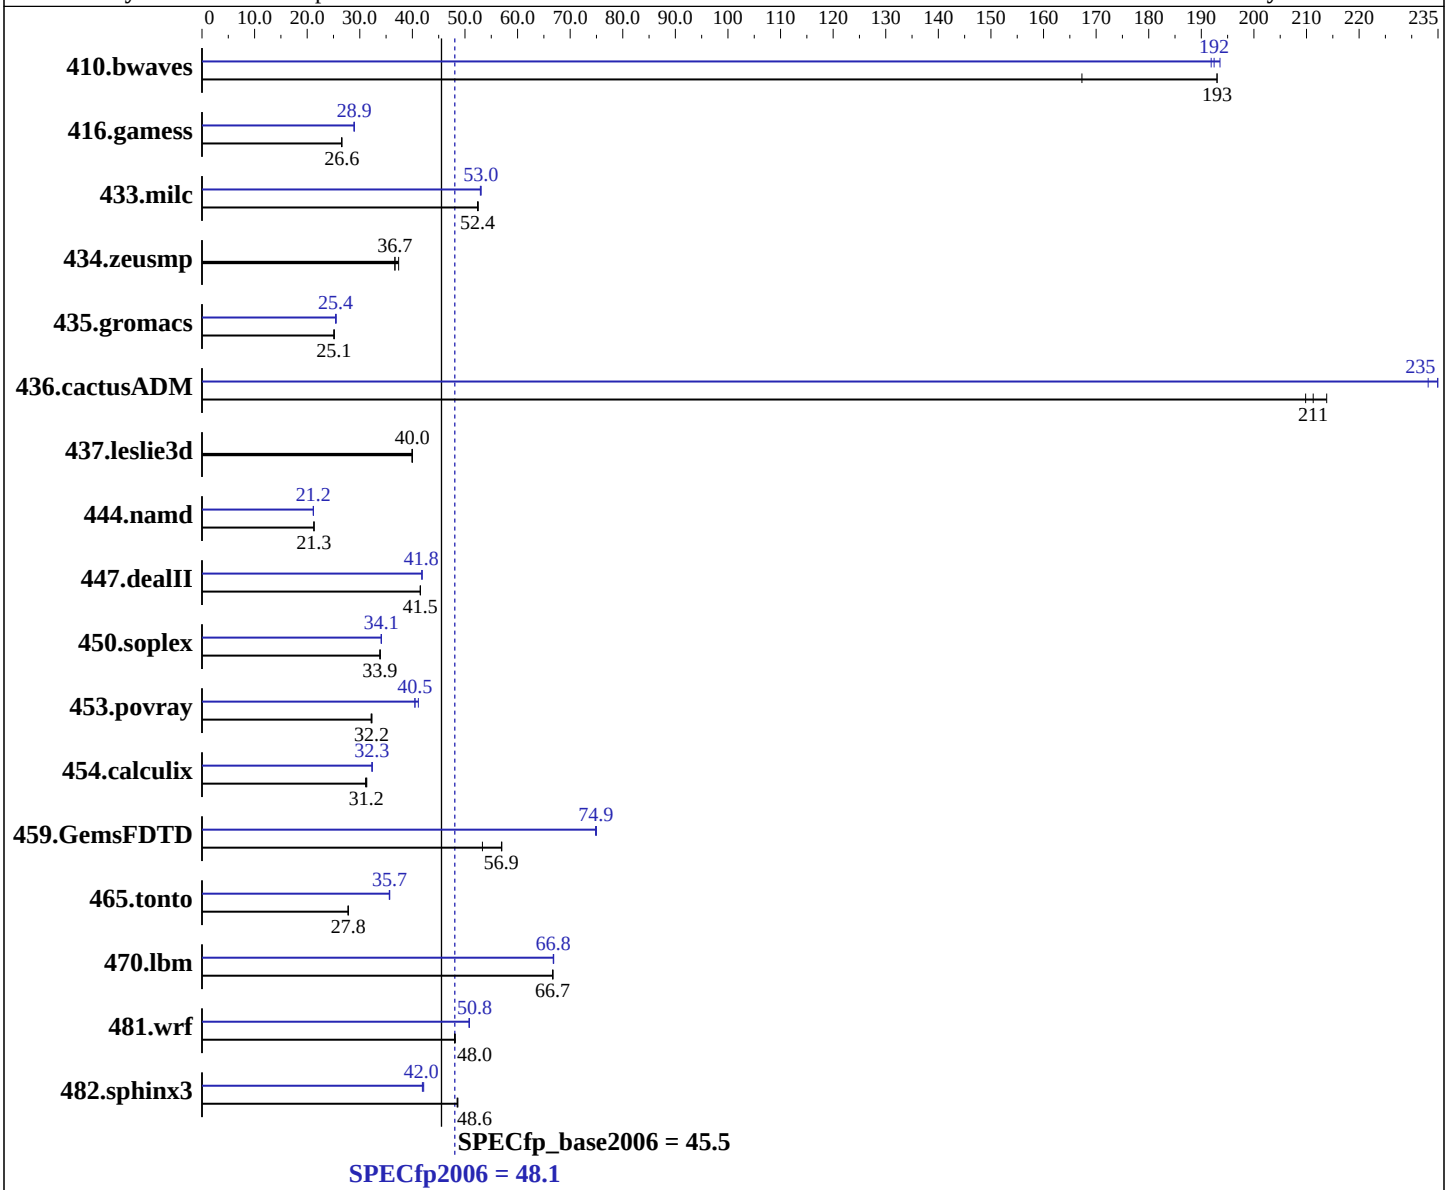

Hardware

CPU Name:	Intel Xeon X5677
CPU Characteristics:	Intel Turbo Boost Technology up to 3.73 GHz
CPU MHz:	3467
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M3 (Intel Xeon X5677)

SPECfp2006 = 48.1

SPECfp_base2006 = 45.5

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB PC3-10600R-ECC)
Disk Subsystem: 1 x 73 GB SAS, 15000RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	81.2	167	**70.4**	**193**	70.4	193	70.8	192	**70.6**	**192**	70.2	194
416.gamess	738	26.5	**736**	**26.6**	736	26.6	**677**	**28.9**	676	29.0	677	28.9
433.milc	175	52.5	**175**	**52.4**	175	52.4	173	52.9	173	53.1	**173**	**53.0**
434.zeusmp	**248**	**36.7**	243	37.4	248	36.7	**248**	**36.7**	243	37.4	248	36.7
435.gromacs	284	25.2	285	25.1	**285**	**25.1**	280	25.5	281	25.4	**281**	**25.4**
436.cactusADM	55.9	214	**56.6**	**211**	56.9	210	50.9	235	51.3	233	**50.9**	**235**
437.leslie3d	**235**	**40.0**	235	39.9	235	40.0	**235**	**40.0**	235	39.9	235	40.0
444.namd	377	21.3	**377**	**21.3**	377	21.3	379	21.2	**379**	**21.2**	379	21.2
447.dealII	275	41.5	**276**	**41.5**	276	41.5	274	41.8	**273**	**41.8**	273	41.8
450.soplex	246	33.9	247	33.8	**246**	**33.9**	245	34.1	**245**	**34.1**	244	34.1
453.povray	**165**	**32.2**	165	32.2	165	32.3	**131**	**40.5**	131	40.5	129	41.1
454.calculix	265	31.1	**264**	**31.2**	263	31.3	**255**	**32.3**	255	32.4	255	32.3
459.GemsFDTD	199	53.3	186	57.0	**186**	**56.9**	142	74.8	**142**	**74.9**	141	75.0
465.tonto	354	27.8	**354**	**27.8**	354	27.8	**276**	**35.7**	276	35.6	276	35.7
470.lbm	206	66.7	**206**	**66.7**	206	66.7	206	66.8	**206**	**66.8**	205	66.9
481.wrf	232	48.2	233	48.0	**233**	**48.0**	220	50.8	**220**	**50.8**	220	50.9
482.sphinx3	**401**	**48.6**	402	48.5	401	48.6	462	42.2	465	41.9	**464**	**42.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Turbo Mode Enable
CPU C State Enable
```

General Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Fortran benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -parallel -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32 -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

453.povray: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel`

416.gamess: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -opt-prefetch -parallel`

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-inline-calloc -opt-malloc-options=3 -auto -unroll4`

Benchmarks using both Fortran and C:

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `Same as 454.calculix`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.00.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.00.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3500 M3 (Intel Xeon X5677)

SPECfp2006 = 48.1

SPECfp_base2006 = 45.5

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 05:37:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 March 2010.