SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710 (Intel Xeon E5507, 2.26 GHz)

SPECint®2006 = 25.1

SPECint_base2006 = 23.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2010
Hardware Availability: Mar-2010
Software Availability: Dec-2009

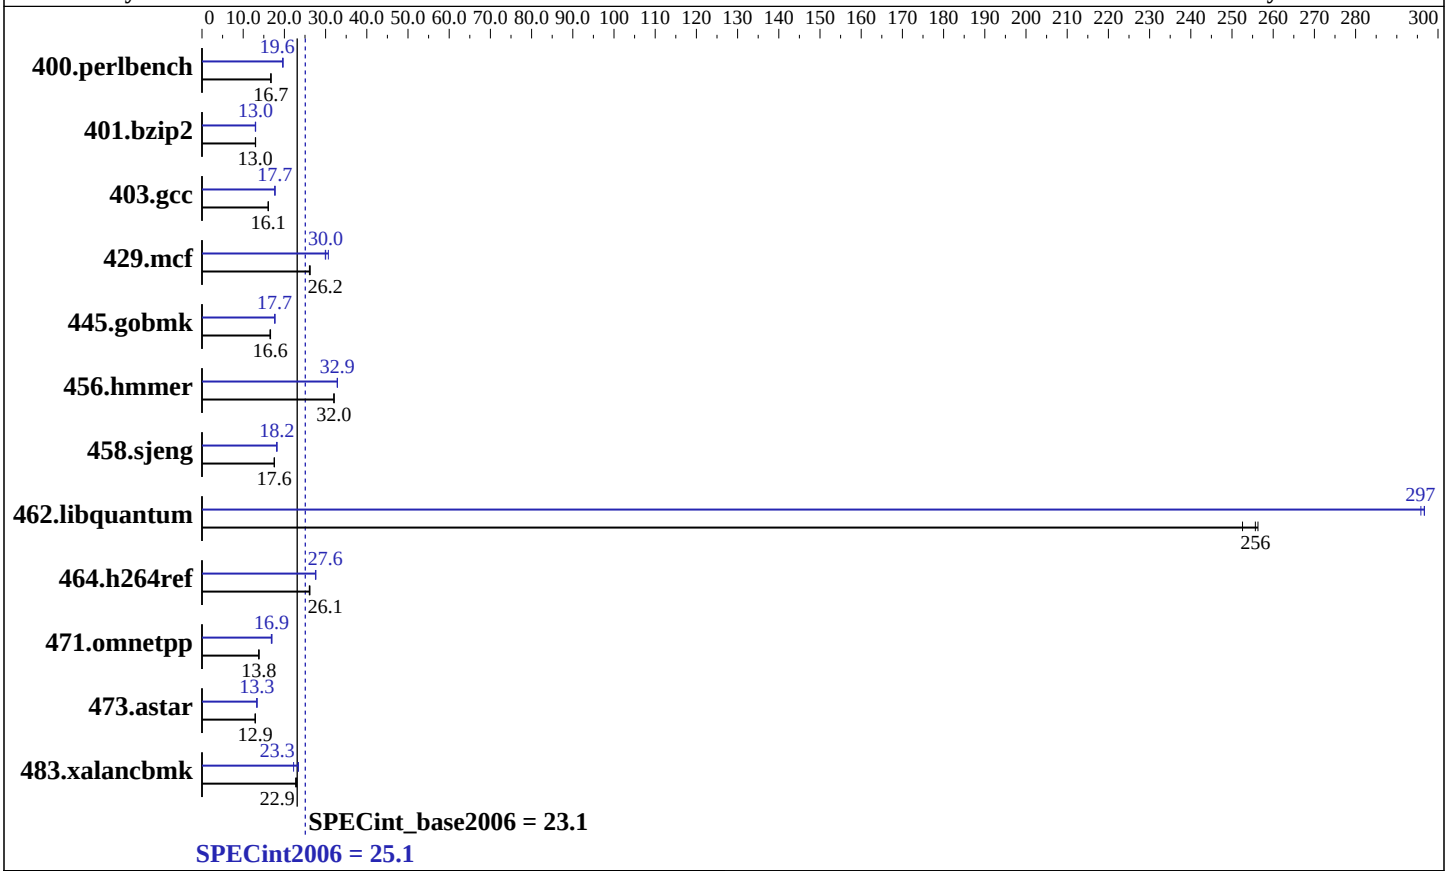

Hardware

CPU Name:	Intel Xeon E5507
CPU Characteristics:	
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC, downclocked to 800 MHz)
Disk Subsystem:	1 x 146 GB 15000 RPM SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
Compiler:	Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710 (Intel Xeon E5507, 2.26 GHz)

SPECint2006 = 25.1

SPECint_base2006 = 23.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2010
Hardware Availability: Mar-2010
Software Availability: Dec-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	585	16.7	583	16.8	**584**	**16.7**	497	19.7	499	19.6	**497**	**19.6**
401.bzip2	741	13.0	744	13.0	**744**	**13.0**	746	12.9	**742**	**13.0**	742	13.0
403.gcc	500	16.1	501	16.1	**501**	**16.1**	**455**	**17.7**	455	17.7	455	17.7
429.mcf	350	26.1	348	26.2	**348**	**26.2**	**304**	**30.0**	305	29.9	297	30.7
445.gobmk	**634**	**16.6**	634	16.5	630	16.6	**594**	**17.7**	594	17.7	593	17.7
456.hmmer	**291**	**32.0**	291	32.1	291	32.0	284	32.9	284	32.8	**284**	**32.9**
458.sjeng	**689**	**17.6**	690	17.5	689	17.6	667	18.2	**666**	**18.2**	666	18.2
462.libquantum	**81.0**	**256**	80.8	256	82.0	253	69.8	297	70.0	296	**69.8**	**297**
464.h264ref	**848**	**26.1**	844	26.2	849	26.1	804	27.5	801	27.6	**802**	**27.6**
471.omnetpp	452	13.8	454	13.8	**452**	**13.8**	371	16.8	**369**	**16.9**	369	16.9
473.astar	**543**	**12.9**	542	12.9	544	12.9	526	13.4	528	13.3	**527**	**13.3**
483.xalancbmk	**302**	**22.9**	303	22.7	300	23.0	310	22.2	295	23.4	**296**	**23.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
The Dell PowerEdge R710 and
the Bull NovaScale R460 F2 models are electronically equivalent.
The results have been measured on a Dell PowerEdge R710 model.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs`
`-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32`

429.mcf: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m32`

Continued on next page

Peak Compiler Invocation (Continued)

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
-auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 11:04:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 July 2010.