



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

### SPECfp®\_rate2006 = 255

ASUS RS700D-E6 (Z8NH-D12) server system (Intel Xeon X5680)

### SPECfp\_rate\_base2006 = 246

CPU2006 license: 9016


Test date: Jun-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

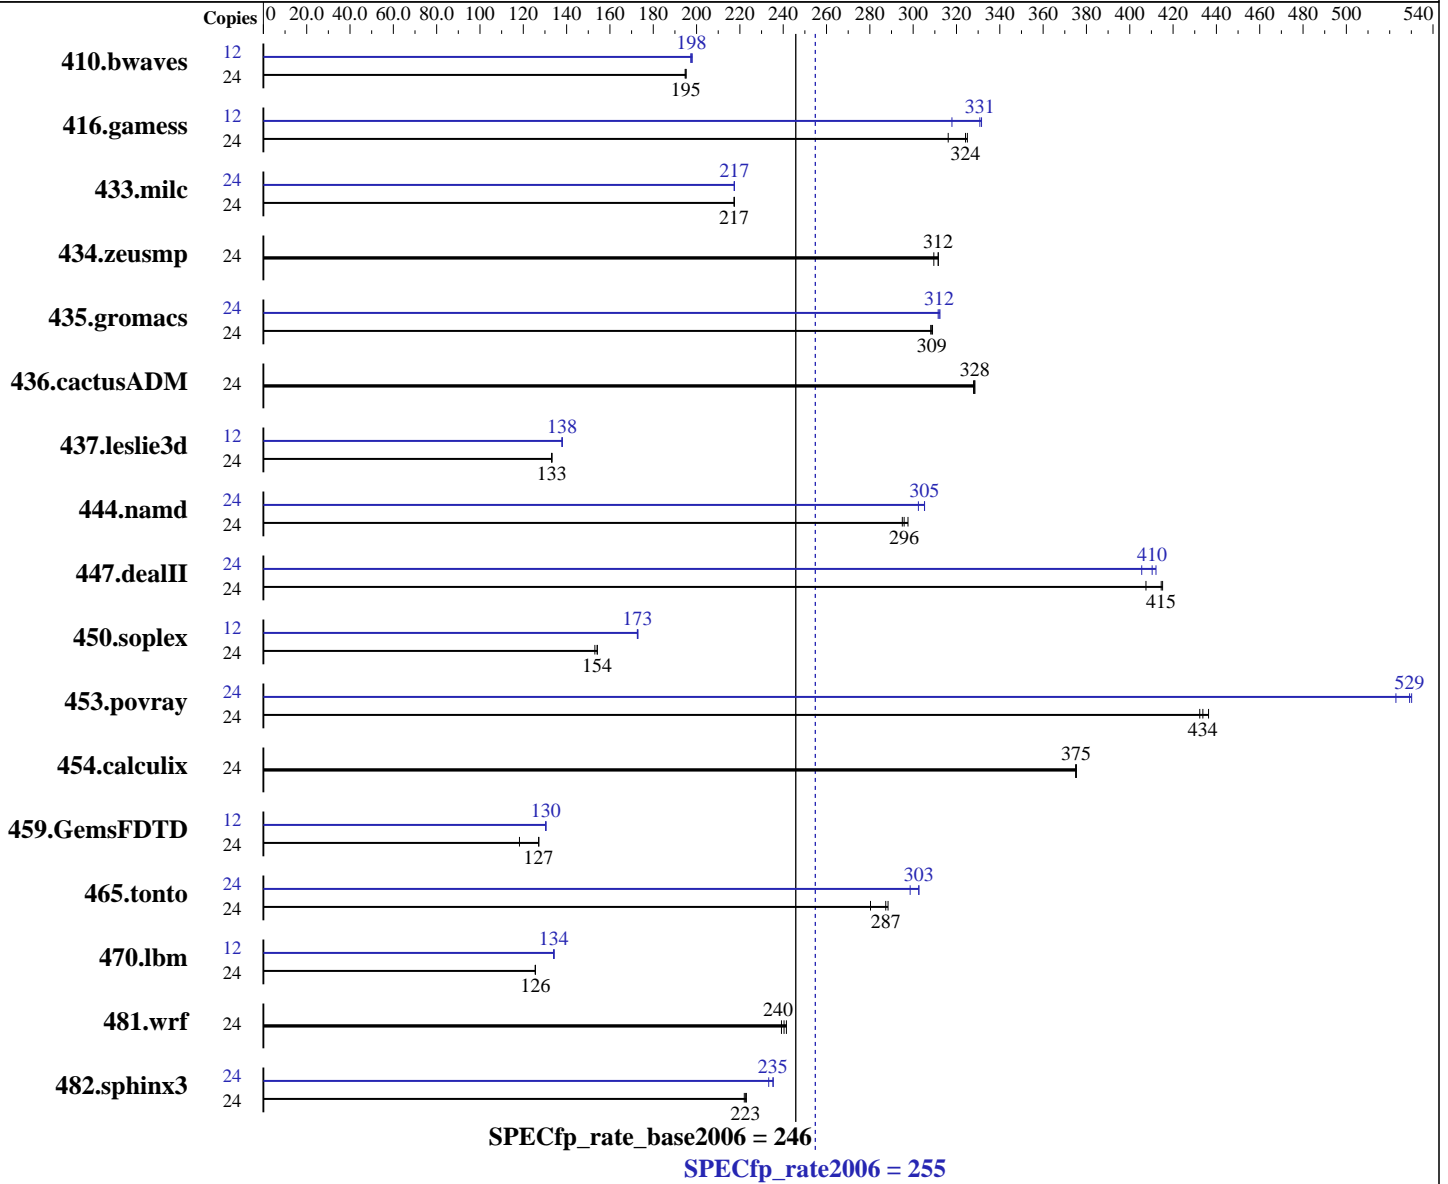

### Hardware

CPU Name: Intel Xeon X5680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECfp\_rate2006 = **255**

ASUS RS700D-E6 (Z8NH-D12) server system (Intel Xeon X5680)

SPECfp\_rate\_base2006 = **246**

CPU2006 license: 9016

Test date: Jun-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB PC3-10600R, CL=9)  
Disk Subsystem: HITACHI HDT725050VLA360 1 x 500 GB SATAII, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1675	195	1671	195	<b>1672</b>	<b>195</b>	12	826	197	824	198	<b>825</b>	<b>198</b>
416.gamess	24	1446	325	<b>1450</b>	<b>324</b>	1486	316	12	739	318	<b>710</b>	<b>331</b>	709	332
433.milc	24	1014	217	<b>1013</b>	<b>217</b>	1013	217	24	1013	217	1013	217	<b>1013</b>	<b>217</b>
434.zeusmp	24	706	310	<b>701</b>	<b>312</b>	701	312	24	706	310	<b>701</b>	<b>312</b>	701	312
435.gromacs	24	<b>555</b>	<b>309</b>	556	308	555	309	24	550	312	549	312	<b>549</b>	<b>312</b>
436.cactusADM	24	873	328	875	328	<b>873</b>	<b>328</b>	24	873	328	875	328	<b>873</b>	<b>328</b>
437.leslie3d	24	1693	133	1695	133	<b>1694</b>	<b>133</b>	12	818	138	817	138	<b>818</b>	<b>138</b>
444.namd	24	<b>651</b>	<b>296</b>	647	298	653	295	24	636	302	<b>631</b>	<b>305</b>	631	305
447.dealII	24	674	407	661	415	<b>662</b>	<b>415</b>	24	677	406	666	412	<b>669</b>	<b>410</b>
450.soplex	24	1308	153	1298	154	<b>1299</b>	<b>154</b>	12	579	173	580	173	<b>579</b>	<b>173</b>
453.povray	24	293	436	<b>294</b>	<b>434</b>	295	432	24	244	523	<b>241</b>	<b>529</b>	241	530
454.calculix	24	528	375	<b>528</b>	<b>375</b>	527	375	24	528	375	<b>528</b>	<b>375</b>	527	375
459.GemsFDTD	24	2154	118	<b>2004</b>	<b>127</b>	2002	127	12	<b>976</b>	<b>130</b>	977	130	976	130
465.tonto	24	<b>822</b>	<b>287</b>	843	280	819	288	24	791	299	<b>780</b>	<b>303</b>	780	303
470.lbm	24	2625	126	<b>2626</b>	<b>126</b>	2628	126	12	1229	134	<b>1229</b>	<b>134</b>	1231	134
481.wrf	24	1110	241	<b>1115</b>	<b>240</b>	1121	239	24	1110	241	<b>1115</b>	<b>240</b>	1121	239
482.sphinx3	24	2107	222	2098	223	<b>2101</b>	<b>223</b>	24	2005	233	<b>1988</b>	<b>235</b>	1987	235

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Component Notes

Tested system case compliance with Intel EEB 3.61 spec  
SSI Server Power Supply 650W or higher  
System was configured with ASPEED AST2050 VGA (on board VGA)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 255**

ASUS RS700D-E6 (Z8NH-D12) server system (Intel Xeon X5680)

**SPECfp\_rate\_base2006 = 246**

**CPU2006 license:** 9016

**Test date:** Jun-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 255**

ASUS RS700D-E6 (Z8NH-D12) server system (Intel Xeon X5680)

**SPECfp\_rate\_base2006 = 246**

**CPU2006 license:** 9016

**Test date:** Jun-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3:icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex:icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
 416.gamess: `-DSPEC_CPU_LP64`  
 433.milc: `-DSPEC_CPU_LP64`  
 434.zeusmp: `-DSPEC_CPU_LP64`  
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
 437.leslie3d: `-DSPEC_CPU_LP64`  
 444.namd: `-DSPEC_CPU_LP64`  
 447.deallI: `-DSPEC_CPU_LP64`  
 453.povray: `-DSPEC_CPU_LP64`  
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
 459.GemsFDTD: `-DSPEC_CPU_LP64`  
 465.tonto: `-DSPEC_CPU_LP64`  
 470.lbm: `-DSPEC_CPU_LP64`  
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 255**

ASUS RS700D-E6 (Z8NH-D12) server system (Intel Xeon X5680)

**SPECfp\_rate\_base2006 = 246**

**CPU2006 license:** 9016

**Test date:** Jun-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 255**

ASUS RS700D-E6 (Z8NH-D12) server system (Intel Xeon X5680)

**SPECfp\_rate\_base2006 = 246**

**CPU2006 license:** 9016

**Test date:** Jun-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20100609.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20100609.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 11:37:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 July 2010.