SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX113 (Intel Xeon X3430)

SPECint®_rate2006 = 91.6

SPECint_rate_base2006 = 85.2

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jul-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

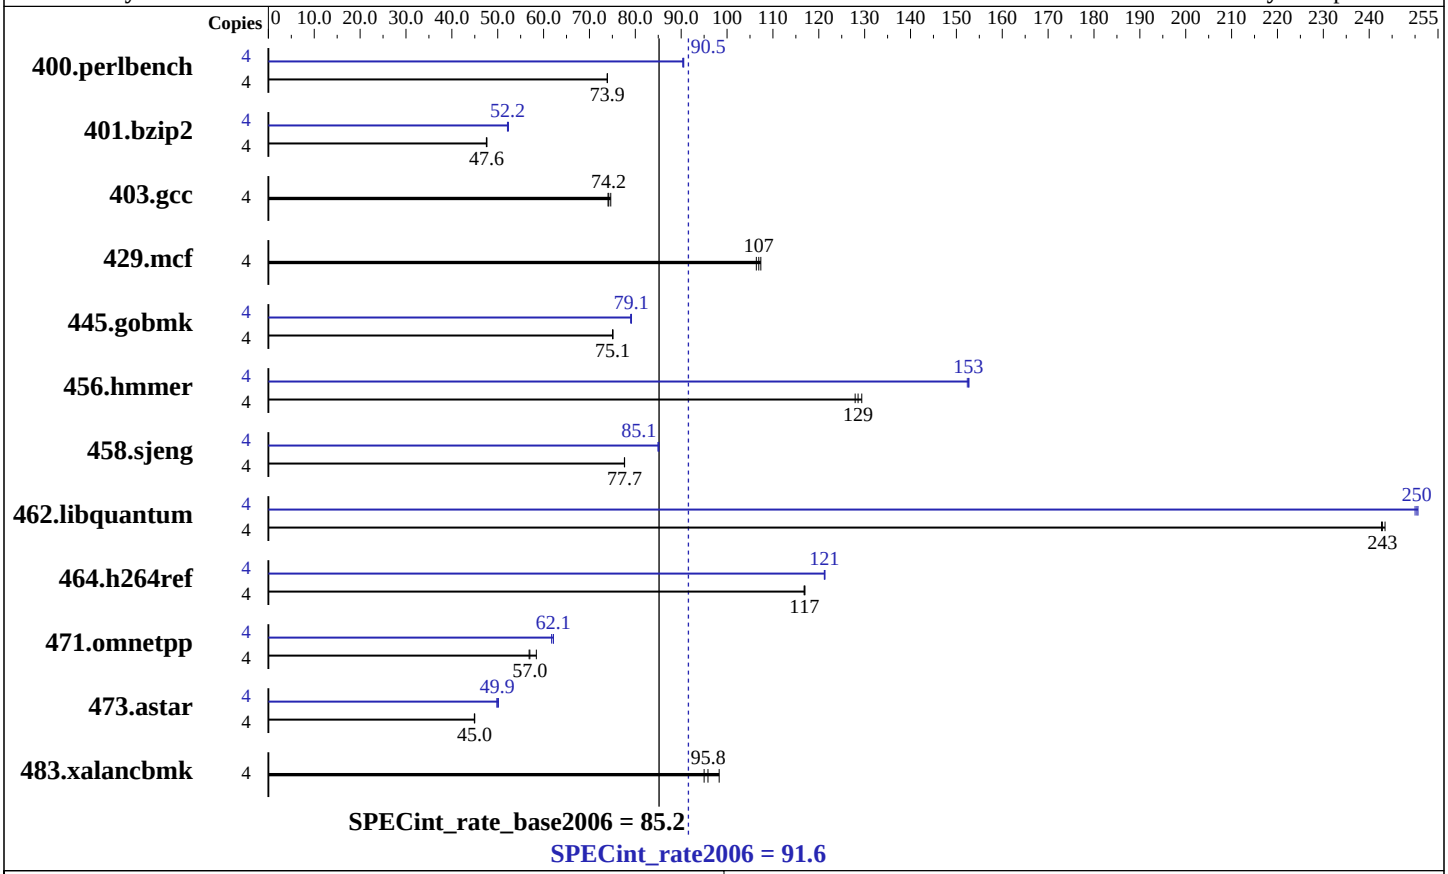

Hardware

CPU Name:	Intel Xeon X3430
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (4 x 2GB, DDR3-1333, Dual Rank, CL 9, ECC)
Disk Subsystem:	1 x 160 GB SATA-2, 7200 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
Compiler:	Intel C++ Professional Compiler 11.1 for Linux Build 20100414 Package ID: l_cproc_p_11.1.072
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX113 (Intel Xeon X3430)

SPECint_rate2006 = 91.6

SPECint_rate_base2006 = 85.2

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jul-2010
Hardware Availability: Apr-2010
Software Availability: Apr-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	529	73.9	529	73.9	**529**	**73.9**	4	**432**	**90.5**	433	90.3	432	90.5
401.bzip2	4	812	47.5	810	47.6	**811**	**47.6**	4	737	52.3	741	52.1	**739**	**52.2**
403.gcc	4	431	74.6	**434**	**74.2**	435	74.1	4	431	74.6	**434**	**74.2**	435	74.1
429.mcf	4	343	106	340	107	**341**	**107**	4	343	106	340	107	**341**	**107**
445.gobmk	4	559	75.1	559	75.1	**559**	**75.1**	4	**530**	**79.1**	530	79.2	531	79.0
456.hmmer	4	**290**	**129**	288	129	292	128	4	**244**	**153**	245	152	244	153
458.sjeng	4	623	77.7	**623**	**77.7**	624	77.6	4	570	84.9	569	85.1	**569**	**85.1**
462.libquantum	4	342	243	**341**	**243**	340	243	4	332	250	331	251	**331**	**250**
464.h264ref	4	**757**	**117**	757	117	758	117	4	730	121	729	121	**730**	**121**
471.omnetpp	4	440	56.8	428	58.4	**439**	**57.0**	4	402	62.1	405	61.7	**402**	**62.1**
473.astar	4	625	44.9	624	45.0	**625**	**45.0**	4	**563**	**49.9**	564	49.8	560	50.2
483.xalancbmk	4	**288**	**95.8**	291	95.0	281	98.3	4	**288**	**95.8**	291	95.0	281	98.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
```

General Notes

```
This result was measured on the Servidor Itautec LX103.
The Servidor Itautec LX103, the Servidor Itautec LX114 and the Servidor Itautec LX113
are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs`
`-L/opt/sh/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

462.libquantum: `icc -m64`

C++ benchmarks (except as noted below):
`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page

Peak Optimization Flags (Continued)

473.astar (continued):
`-L/opt/sh/SmartHeap_8/lib -lsmartheap64`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.1-linux64-revE.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Itautec-Intel-ic11.1-linux64-revE.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:45:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 August 2010.