



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp[®]_rate2006 = 119

Gateway GB2x280 F1 (Intel Xeon L5609, 1.86 GHz)

SPECfp_rate_base2006 = 116

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2010

Hardware Availability: Sep-2010

Software Availability: Jan-2010

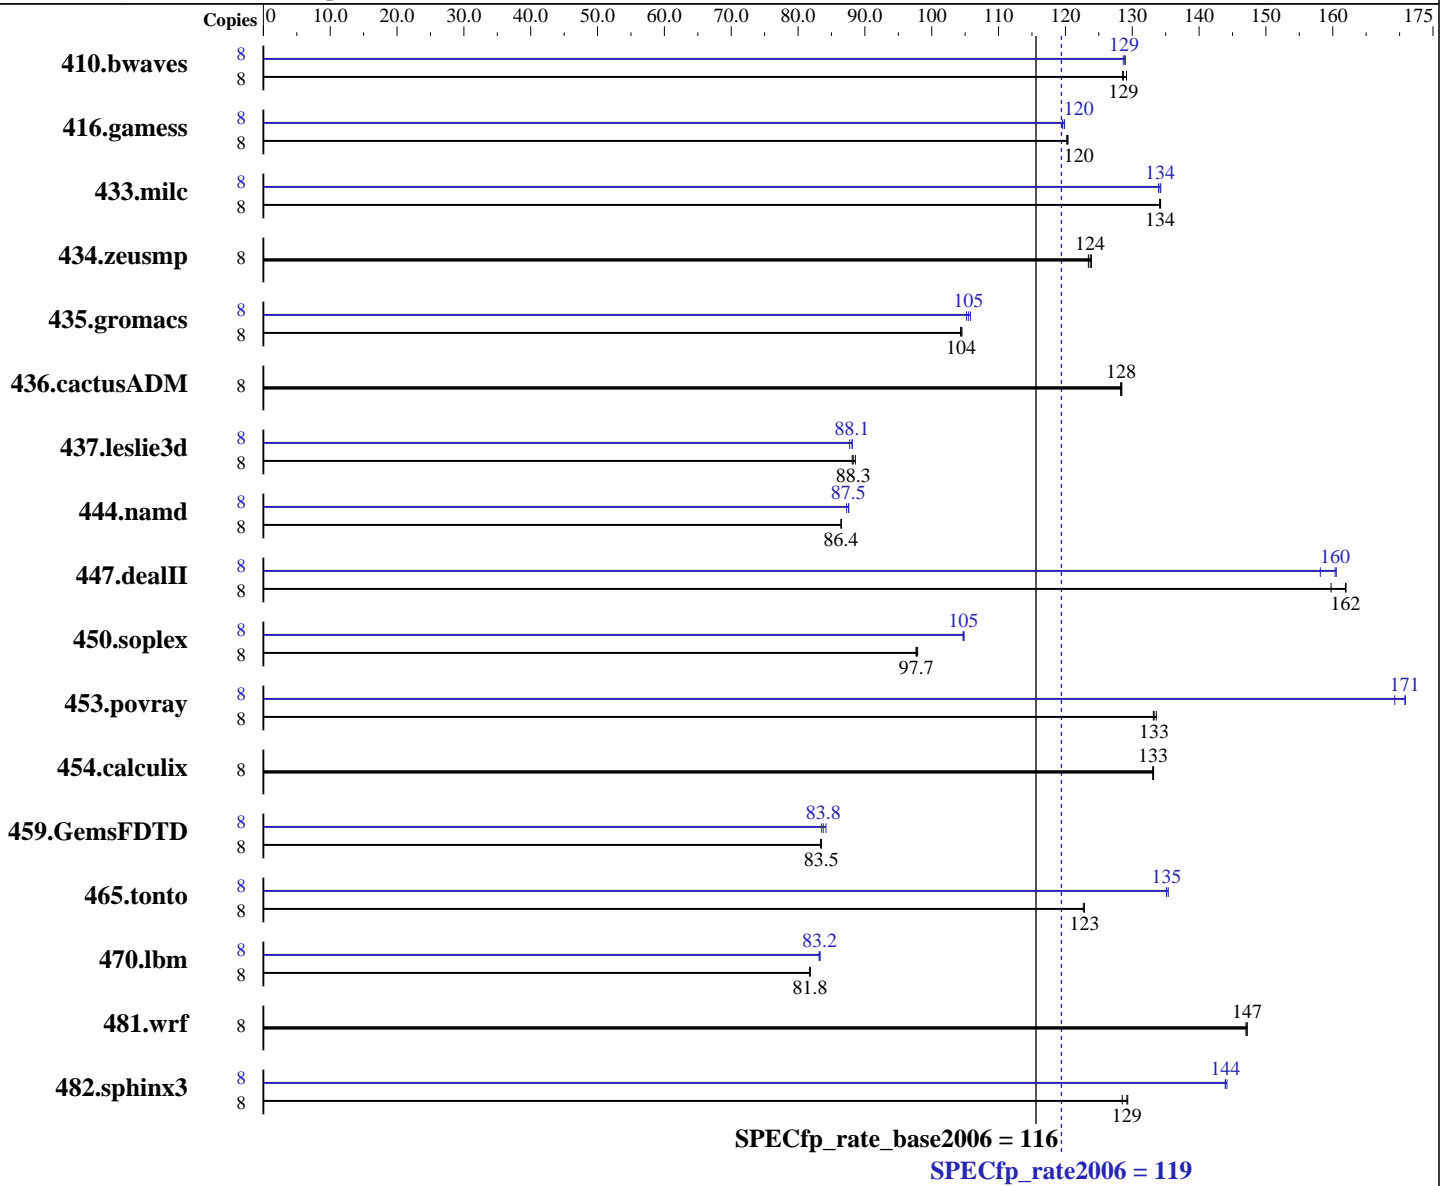

Hardware

CPU Name: Intel Xeon L5609
 CPU Characteristics:
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 119

Gateway GB2x280 F1 (Intel Xeon L5609, 1.86 GHz)

SPECfp_rate_base2006 = 116

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB DDR3-1333 RDIMM, ECC, CL9, memory runs at 1066 MHz)
 Disk Subsystem: 1 x 150 GB SATA II, 7200 RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	842	129	846	129	845	129	8	844	129	845	129	843	129
416.gamess	8	1302	120	1303	120	1301	120	8	1307	120	1307	120	1310	120
433.milc	8	547	134	548	134	547	134	8	548	134	547	134	547	134
434.zeusmp	8	590	123	588	124	588	124	8	590	123	588	124	588	124
435.gromacs	8	546	105	547	104	548	104	8	542	105	540	106	543	105
436.cactusADM	8	744	128	745	128	745	128	8	744	128	745	128	745	128
437.leslie3d	8	849	88.6	852	88.3	854	88.1	8	857	87.7	853	88.1	854	88.1
444.namd	8	742	86.4	742	86.4	742	86.5	8	733	87.5	733	87.6	735	87.3
447.dealII	8	565	162	573	160	565	162	8	570	161	579	158	571	160
450.soplex	8	683	97.7	683	97.7	682	97.9	8	637	105	636	105	637	105
453.povray	8	320	133	319	134	319	133	8	251	169	249	171	249	171
454.calculix	8	496	133	496	133	496	133	8	496	133	496	133	496	133
459.GemsFDTD	8	1018	83.4	1017	83.5	1017	83.5	8	1013	83.8	1016	83.5	1008	84.2
465.tonto	8	641	123	642	123	641	123	8	583	135	581	135	582	135
470.lbm	8	1343	81.8	1345	81.7	1344	81.8	8	1320	83.3	1322	83.1	1320	83.2
481.wrf	8	607	147	608	147	607	147	8	607	147	608	147	607	147
482.sphinx3	8	1213	129	1206	129	1207	129	8	1083	144	1081	144	1083	144

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Platform Notes

Fan speed set to full Speed (ie. Enterprise Blade mode) with Smart Blade Console through CMM (Chassis Management Module)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 119

Gateway GB2x280 F1 (Intel Xeon L5609, 1.86 GHz)

SPECfp_rate_base2006 = 116

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

The Acer AB2x280 F1, and Gateway GB2x280 F1 are electronically equivalent.
This result was measured on Gateway GB2x280 F1.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 119

Gateway GB2x280 F1 (Intel Xeon L5609, 1.86 GHz)

SPECfp_rate_base2006 = 116

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
 416.gamess: `-DSPEC_CPU_LP64`
 433.milc: `-DSPEC_CPU_LP64`
 434.zeusmp: `-DSPEC_CPU_LP64`
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
 437.leslie3d: `-DSPEC_CPU_LP64`
 444.namd: `-DSPEC_CPU_LP64`
 447.deallI: `-DSPEC_CPU_LP64`
 453.povray: `-DSPEC_CPU_LP64`
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
 459.GemsFDTD: `-DSPEC_CPU_LP64`
 465.tonto: `-DSPEC_CPU_LP64`
 470.lbm: `-DSPEC_CPU_LP64`
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 119

Gateway GB2x280 F1 (Intel Xeon L5609, 1.86 GHz)

SPECfp_rate_base2006 = 116

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 119

Gateway GB2x280 F1 (Intel Xeon L5609, 1.86 GHz)

SPECfp_rate_base2006 = 116

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:32:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 August 2010.