SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M3 (Intel Xeon L5520)

SPECfp®2006 = 34.7

SPECfp_base2006 = 32.5

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

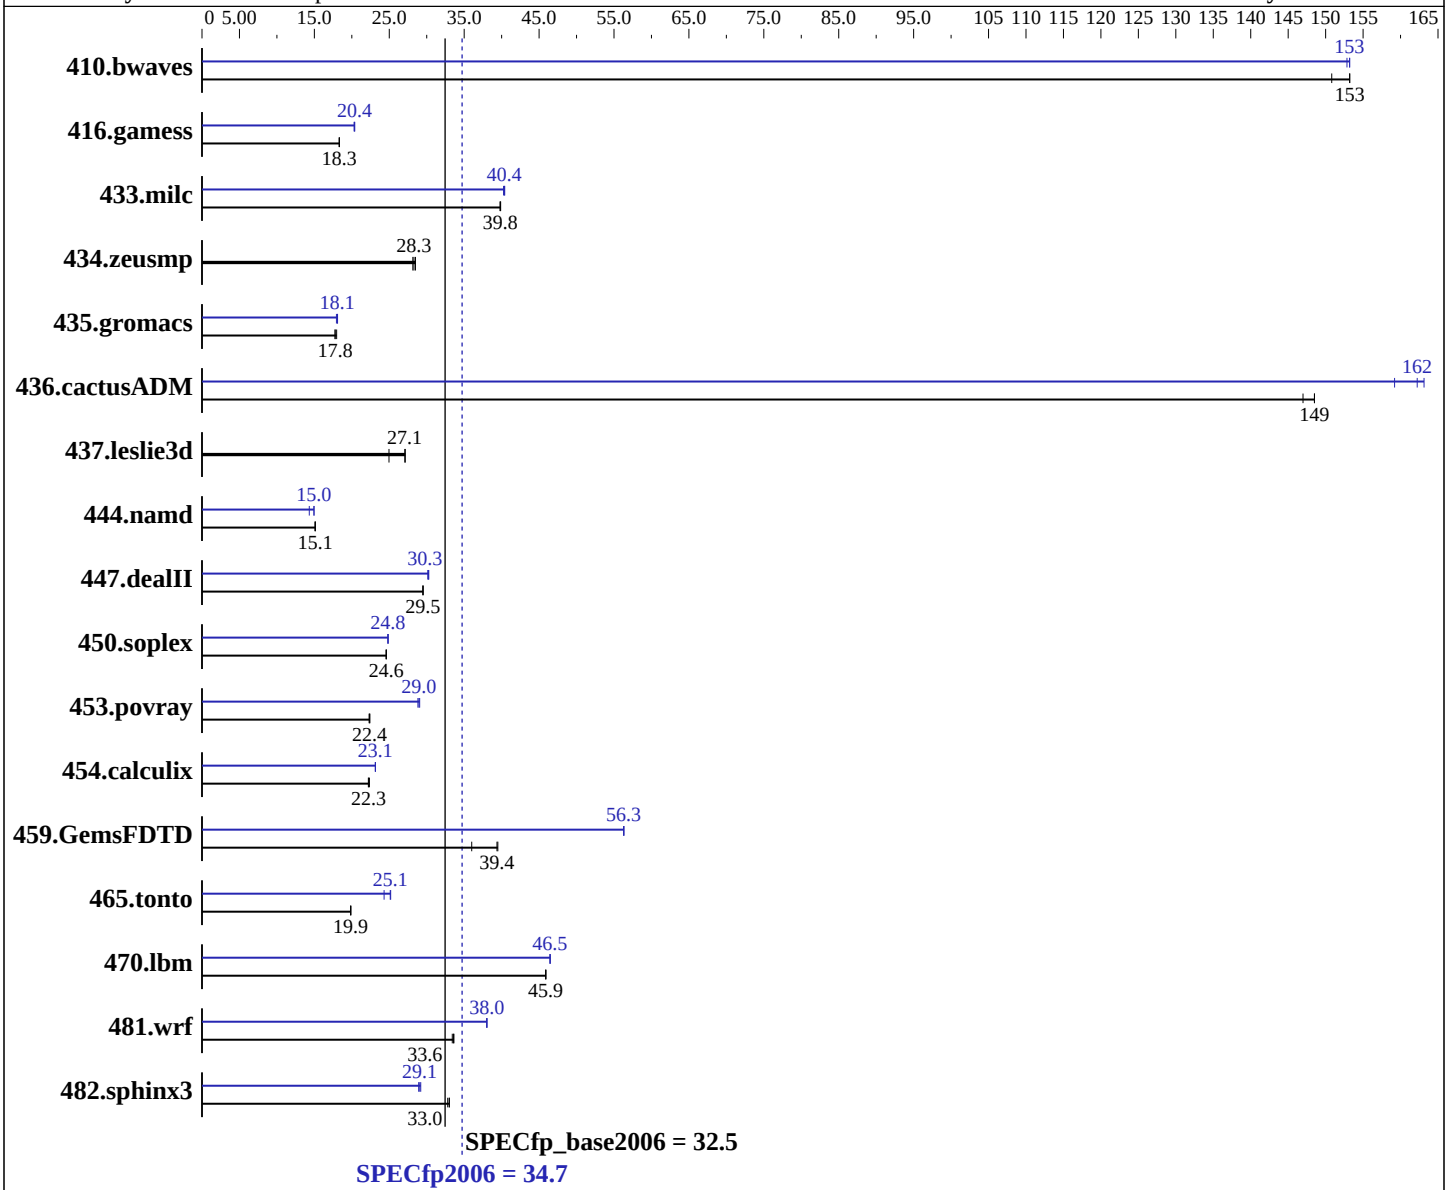

Hardware

CPU Name:	Intel Xeon L5520
CPU Characteristics:	Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M3 (Intel Xeon L5520)

SPECfp2006 = 34.7

SPECfp_base2006 = 32.5

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB PC3-10600R CL9, 2 Rank)
Disk Subsystem:	1 x 250 GB SATA, 7200 RPM
Other Hardware:	None

Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	90.1	151	**88.7**	**153**	88.7	153	88.9	153	88.7	153	**88.7**	**153**
416.gamess	1067	18.3	**1068**	**18.3**	1069	18.3	**961**	**20.4**	961	20.4	964	20.3
433.milc	230	39.9	**231**	**39.8**	231	39.8	**227**	**40.4**	227	40.4	228	40.3
434.zeusmp	319	28.5	323	28.1	**322**	**28.3**	319	28.5	323	28.1	**322**	**28.3**
435.gromacs	402	17.8	**402**	**17.8**	397	18.0	398	17.9	**395**	**18.1**	395	18.1
436.cactusADM	**80.5**	**149**	81.3	147	80.5	149	**73.7**	**162**	73.3	163	75.1	159
437.leslie3d	**347**	**27.1**	377	25.0	346	27.1	**347**	**27.1**	377	25.0	346	27.1
444.namd	**531**	**15.1**	530	15.1	531	15.1	560	14.3	**536**	**15.0**	536	15.0
447.dealII	388	29.5	**388**	**29.5**	388	29.5	378	30.3	380	30.1	**378**	**30.3**
450.soplex	339	24.6	339	24.6	**339**	**24.6**	336	24.8	336	24.8	**336**	**24.8**
453.povray	238	22.4	239	22.3	**238**	**22.4**	**184**	**29.0**	185	28.8	183	29.1
454.calculix	372	22.2	**371**	**22.3**	369	22.3	356	23.1	356	23.1	**356**	**23.1**
459.GemsFDTD	**269**	**39.4**	269	39.5	295	36.0	188	56.3	188	56.3	**188**	**56.3**
465.tonto	495	19.9	**496**	**19.9**	496	19.8	**392**	**25.1**	405	24.3	391	25.2
470.lbm	299	45.9	**299**	**45.9**	299	45.9	296	46.5	296	46.5	**296**	**46.5**
481.wrf	**333**	**33.6**	334	33.4	332	33.6	294	38.0	294	38.0	**294**	**38.0**
482.sphinx3	590	33.0	594	32.8	**591**	**33.0**	667	29.2	674	28.9	**670**	**29.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Turbo Mode Enable
Turbo Boost set to Traditional
CPU C State Enable
```

General Notes

```
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Fortran benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -parallel -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32 -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

453.povray: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel`

416.gamess: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -Ob0 -opt-prefetch -parallel`

465.tonto: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-inline-calloc -opt-malloc-options=3 -auto -unroll4`

Benchmarks using both Fortran and C:

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-unroll2 -opt-prefetch -parallel -auto-ilp32`

454.calculix: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32`

481.wrf: `Same as 454.calculix`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100804.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100804.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 M3 (Intel Xeon L5520)

SPECfp2006 = 34.7

SPECfp_base2006 = 32.5

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:44:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 August 2010.