SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS M470, Intel Xeon W3670

SPECint®2006 = 37.8

SPECint_base2006 = 34.9

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Sep-2010
Hardware Availability: Aug-2010
Software Availability: Dec-2009

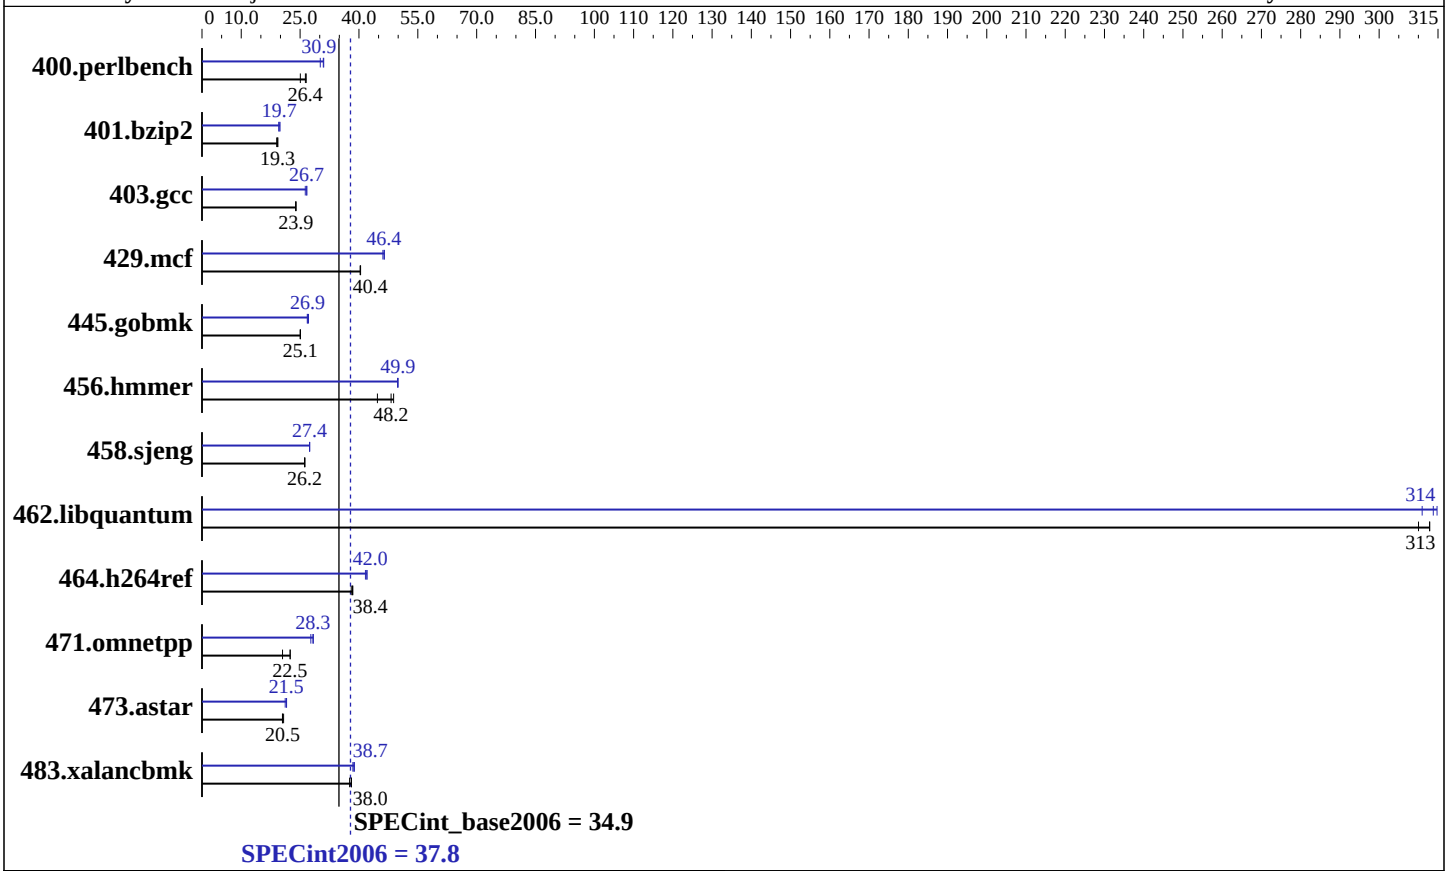

Hardware

CPU Name:	Intel Xeon W3670
CPU Characteristics:	Intel Turbo Boost Technology up to 3.46 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	6 cores, 1 chip, 6 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	12 GB (6x2 GB PC3-10600E, 2 rank, CL9, ECC, running at 1066 MHz)
Disk Subsystem:	1 x SATA II, 400 GB, 7200 rpm
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), kernel 2.6.27.19-5-default
Compiler:	Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel:	Yes
File System:	ext3
System State:	Multi-User Run Level 3
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS M470, Intel Xeon W3670

SPECint2006 = 37.8

SPECint_base2006 = 34.9

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Sep-2010
Hardware Availability: Aug-2010
Software Availability: Dec-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	368	26.6	390	25.1	**371**	**26.4**	**316**	**30.9**	315	31.0	324	30.1
401.bzip2	507	19.0	**501**	**19.3**	499	19.3	493	19.6	**490**	**19.7**	485	19.9
403.gcc	336	23.9	**336**	**23.9**	337	23.9	306	26.3	**302**	**26.7**	301	26.7
429.mcf	226	40.4	**226**	**40.4**	226	40.3	198	46.1	196	46.5	**197**	**46.4**
445.gobmk	418	25.1	**418**	**25.1**	419	25.0	386	27.1	391	26.8	**389**	**26.9**
456.hmmer	**194**	**48.2**	209	44.7	191	48.8	187	49.9	**187**	**49.9**	187	49.9
458.sjeng	463	26.1	462	26.2	**462**	**26.2**	441	27.4	**441**	**27.4**	442	27.4
462.libquantum	66.8	310	66.2	313	**66.2**	**313**	**66.0**	**314**	65.8	315	66.6	311
464.h264ref	582	38.0	576	38.4	**577**	**38.4**	526	42.1	531	41.7	**527**	**42.0**
471.omnetpp	305	20.5	278	22.5	**278**	**22.5**	220	28.4	225	27.7	**221**	**28.3**
473.astar	342	20.5	**342**	**20.5**	338	20.8	**326**	**21.5**	331	21.2	326	21.6
483.xalancbmk	181	38.1	**181**	**38.0**	183	37.6	179	38.5	178	38.8	**178**	**38.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
```

Platform Notes

```
BIOS configuration:
Data Reuse Optimization = Disabled
Hyper-Threading Technology = Disabled
```

General Notes

```
For information about Fujitsu please visit: http://www.fujitsu.com
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
```

Base Compiler Invocation

C benchmarks:

```
icc  -m64
```

C++ benchmarks:

```
icpc -m64
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):
icpc -m32

Continued on next page

Peak Compiler Invocation (Continued)

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
-auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.02.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.02.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:48:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 September 2010.