SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265+ (Intel Xeon L5609, 1.86 GHz)

SPECint®_rate2006 = 152

SPECint_rate_base2006 = 142

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2011
Hardware Availability: May-2010
Software Availability: Nov-2010

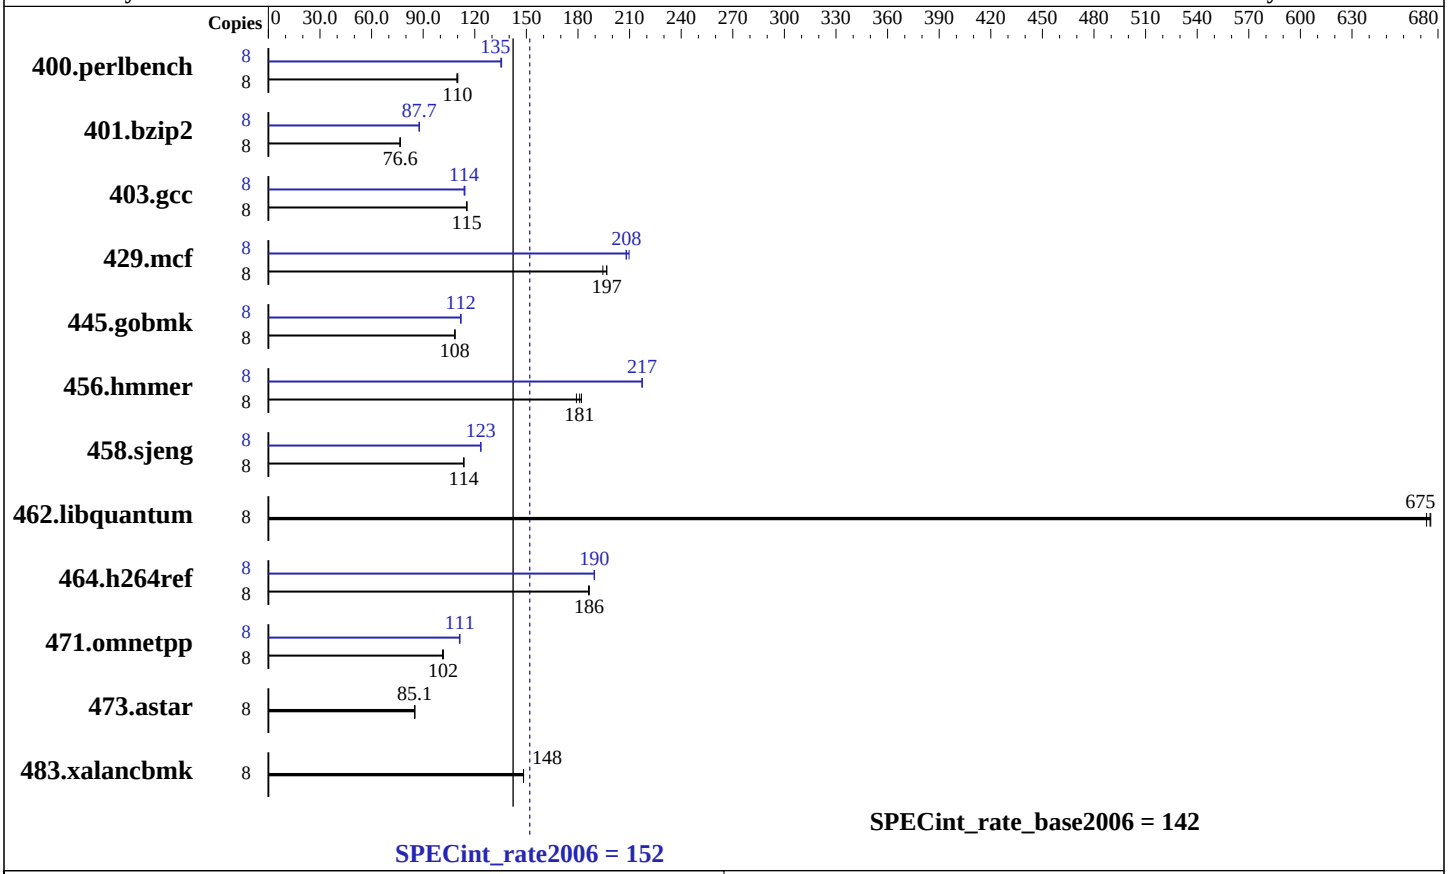

Hardware

CPU Name:	Intel Xeon L5609
CPU Characteristics:	
CPU MHz:	1866
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz)
Disk Subsystem:	2 x 50 GB SATA, SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL265+ (Intel Xeon L5609, 1.86 GHz)

SPECint_rate2006 = 152

SPECint_rate_base2006 = 142

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Feb-2011
Hardware Availability: May-2010
Software Availability: Nov-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	710	110	**711**	**110**	713	110	8	578	135	576	136	**578**	**135**
401.bzip2	8	1008	76.6	1007	76.6	**1008**	**76.6**	8	879	87.9	**881**	**87.7**	881	87.6
403.gcc	8	**558**	**115**	558	115	559	115	8	564	114	**565**	**114**	566	114
429.mcf	8	375	194	371	197	**371**	**197**	8	351	208	348	210	**350**	**208**
445.gobmk	8	773	109	775	108	**774**	**108**	8	749	112	751	112	**750**	**112**
456.hmmer	8	**412**	**181**	410	182	417	179	8	344	217	**344**	**217**	343	217
458.sjeng	8	852	114	**852**	**114**	852	114	8	784	124	784	123	**784**	**123**
462.libquantum	8	**245**	**675**	246	673	245	676	8	**245**	**675**	246	673	245	676
464.h264ref	8	**949**	**186**	949	186	951	186	8	934	190	935	189	**934**	**190**
471.omnetpp	8	494	101	492	102	**492**	**102**	8	**450**	**111**	449	111	450	111
473.astar	8	659	85.2	661	85.0	**660**	**85.1**	8	659	85.2	661	85.0	**660**	**85.1**
483.xalancbmk	8	372	148	372	148	**372**	**148**	8	372	148	372	148	**372**	**148**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Hugepages was enabled with the following:
  'nodev   /mnt/hugepages   hugetlbfs  defaults   0 0' added to /etc/fstab
   echo 3600 > /proc/sys/vm/nr_hugepages
   export HUGETLB_MORECORE=yes
   export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
Power C-states enabled in BIOS
Demand Scrub disabled in BIOS
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch`
`-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs`
`-L/smartheap -lsmartheap`
`-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

Continued on next page

Peak Optimization Flags (Continued)

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 16:26:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 March 2011.