



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp®_rate2006 = 240

Acer AT350 F1 (Intel Xeon X5670)

SPECfp_rate_base2006 = 232

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

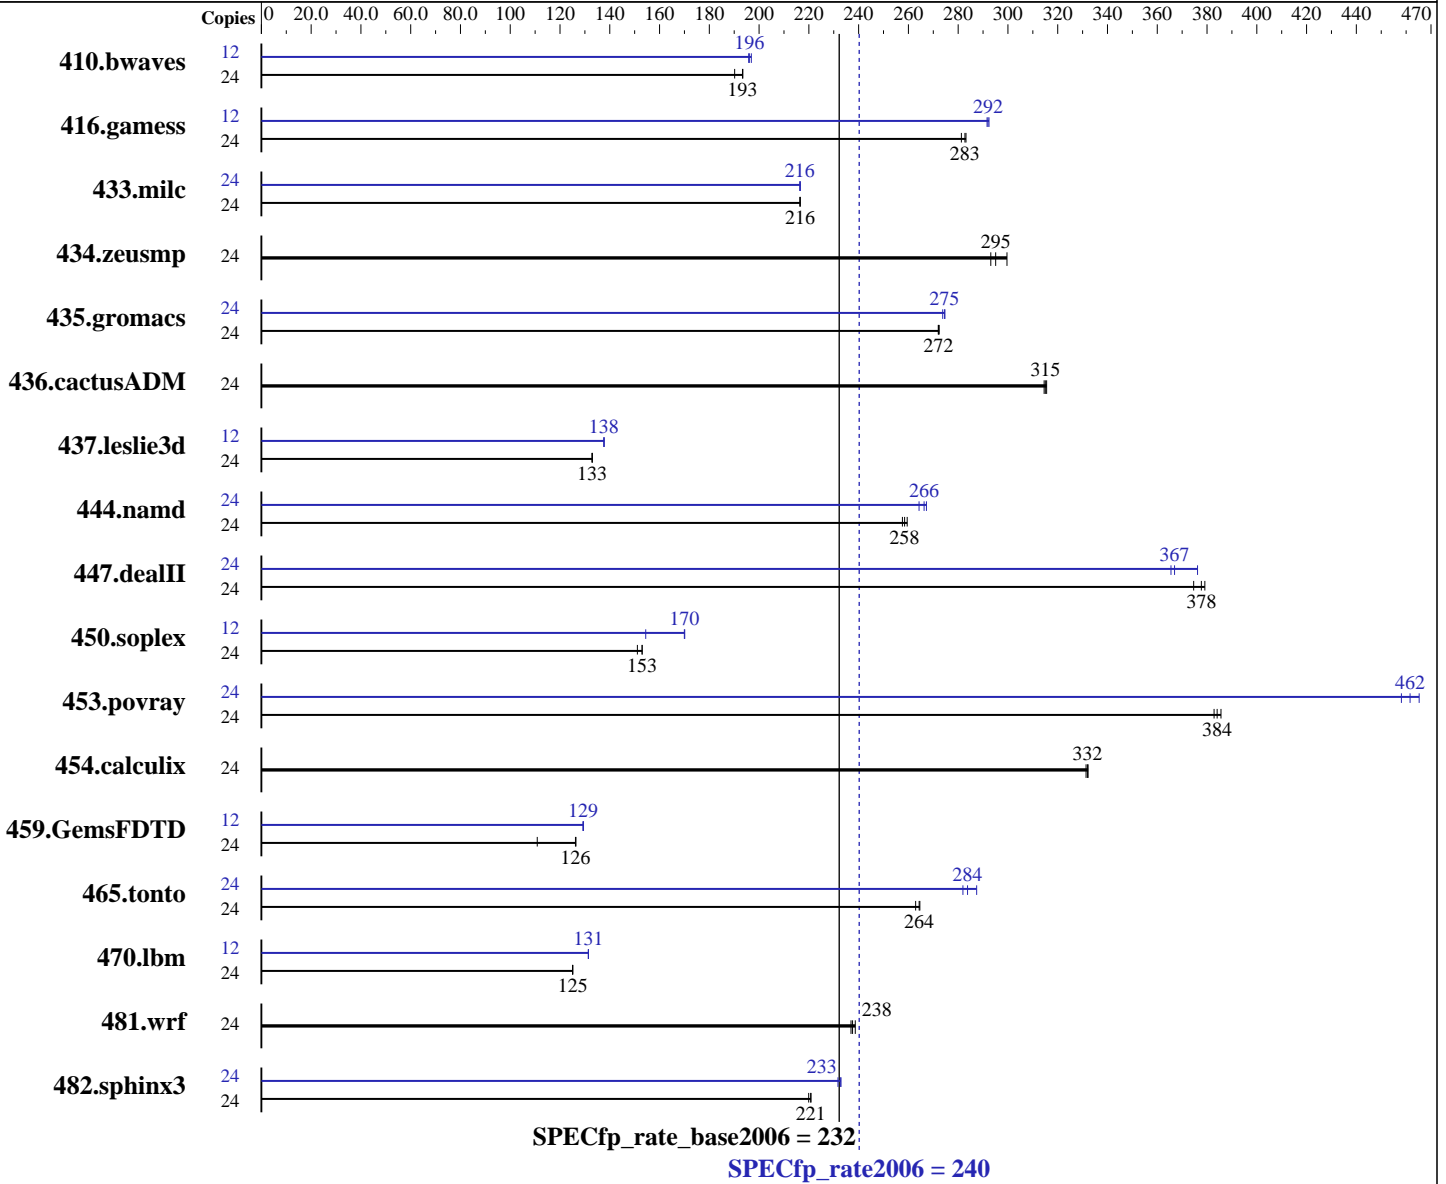

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2993
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 240

Acer AT350 F1 (Intel Xeon X5670)

SPECfp_rate_base2006 = 232

CPU2006 license: 97

Test date: Dec-2010

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 300 GB SATA, 10000RPM SATA HDD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1715	190	<u>1687</u>	<u>193</u>	1686	193	12	<u>832</u>	<u>196</u>	828	197	833	196
416.gamess	24	<u>1662</u>	<u>283</u>	1671	281	1660	283	12	806	292	<u>805</u>	<u>292</u>	804	292
433.milc	24	1018	216	<u>1018</u>	<u>216</u>	1018	216	24	1017	217	<u>1018</u>	<u>216</u>	1018	216
434.zeusmp	24	729	300	745	293	<u>740</u>	<u>295</u>	24	729	300	745	293	<u>740</u>	<u>295</u>
435.gromacs	24	629	272	<u>630</u>	<u>272</u>	630	272	24	<u>624</u>	<u>275</u>	626	274	624	275
436.cactusADM	24	909	316	912	315	<u>910</u>	<u>315</u>	24	909	316	912	315	<u>910</u>	<u>315</u>
437.leslie3d	24	1696	133	1698	133	<u>1697</u>	<u>133</u>	12	<u>819</u>	<u>138</u>	819	138	820	138
444.namd	24	742	260	747	258	<u>745</u>	<u>258</u>	24	728	264	720	267	<u>723</u>	<u>266</u>
447.dealII	24	<u>727</u>	<u>378</u>	733	375	724	379	24	730	376	<u>748</u>	<u>367</u>	751	366
450.soplex	24	1325	151	1308	153	<u>1308</u>	<u>153</u>	12	648	154	588	170	<u>589</u>	<u>170</u>
453.povray	24	331	386	334	383	<u>332</u>	<u>384</u>	24	279	458	274	465	<u>277</u>	<u>462</u>
454.calculix	24	598	331	<u>596</u>	<u>332</u>	596	332	24	598	331	<u>596</u>	<u>332</u>	596	332
459.GemsFDTD	24	2297	111	2014	126	<u>2018</u>	<u>126</u>	12	985	129	<u>984</u>	<u>129</u>	984	129
465.tonto	24	<u>893</u>	<u>264</u>	898	263	893	265	24	838	282	822	287	<u>832</u>	<u>284</u>
470.lbm	24	<u>2636</u>	<u>125</u>	2635	125	2637	125	12	1255	131	1254	131	<u>1254</u>	<u>131</u>
481.wrf	24	1123	239	<u>1128</u>	<u>238</u>	1131	237	24	1123	239	<u>1128</u>	<u>238</u>	1131	237
482.sphinx3	24	2127	220	<u>2119</u>	<u>221</u>	2118	221	24	2019	232	<u>2009</u>	<u>233</u>	2009	233

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
This result was measured on the Gateway GT350 F1.
The Acer AT350 F1 is electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 240

Acer AT350 F1 (Intel Xeon X5670)

SPECfp_rate_base2006 = 232

CPU2006 license: 97

Test date: Dec-2010

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 240

Acer AT350 F1 (Intel Xeon X5670)

SPECfp_rate_base2006 = 232

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 240

Acer AT350 F1 (Intel Xeon X5670)

SPECfp_rate_base2006 = 232

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 240

Acer AT350 F1 (Intel Xeon X5670)

SPECfp_rate_base2006 = 232

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revH.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 19:59:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 April 2011.