SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M3000

SPECint®_rate2006 = 56.2

SPECint_rate_base2006 = 50.3

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Fujitsu

Test date: Feb-2011
Hardware Availability: Apr-2011
Software Availability: Sep-2010

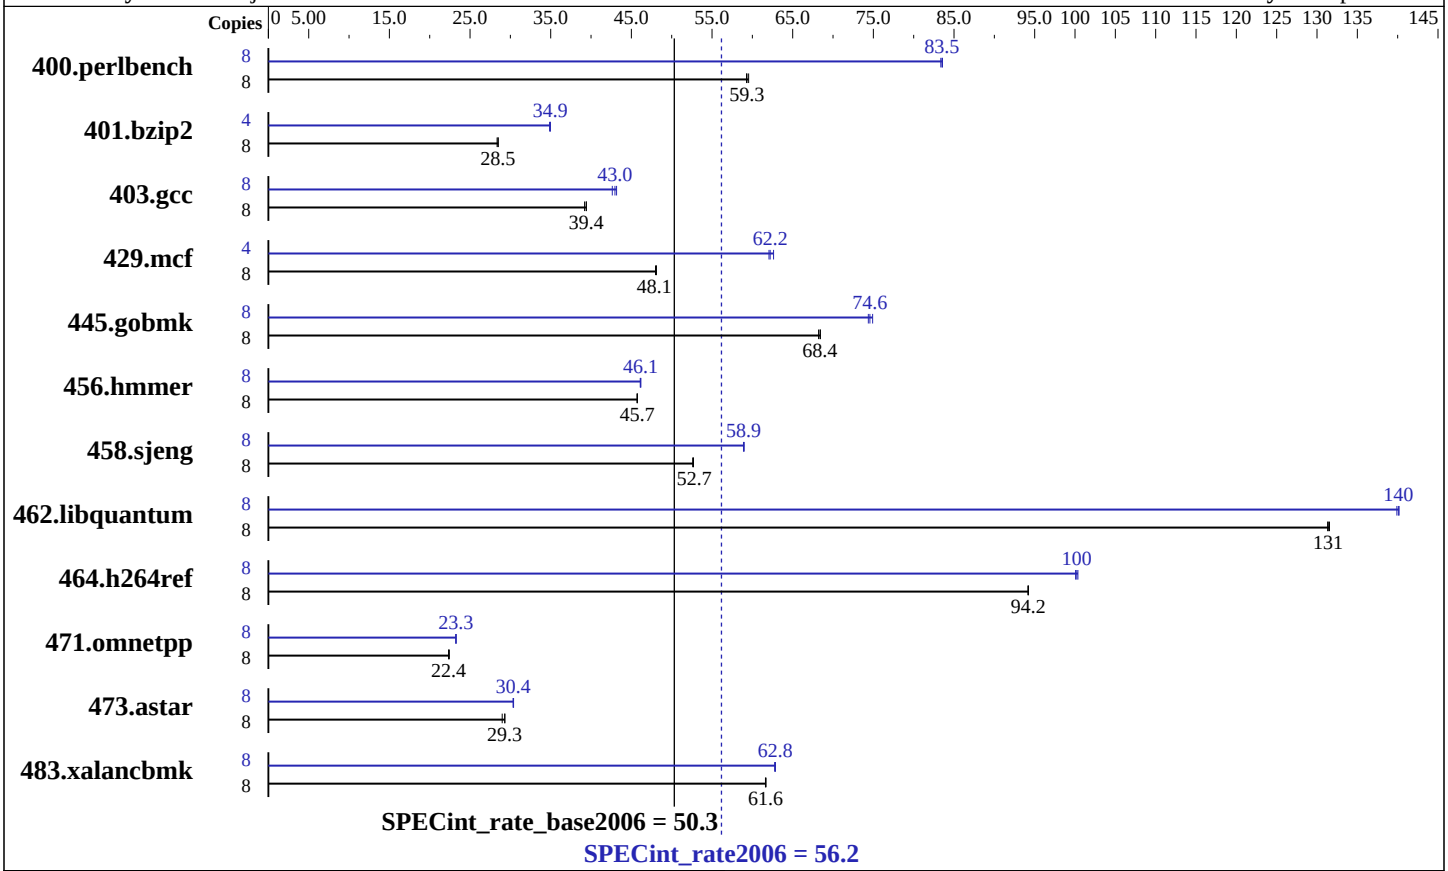

Hardware

CPU Name:	SPARC64 VII+
CPU Characteristics:	
CPU MHz:	2860
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	5632 KB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	32 GB (8 x 4 GB, 2-way interleaved)
Disk Subsystem:	1 x 300 GB 10,000 RPM SAS
Other Hardware:	None

Software

Operating System:	Oracle Solaris 10 9/10
Compiler:	Oracle Solaris Studio 12.2
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M3000

SPECint_rate2006 = 56.2

SPECint_rate_base2006 = 50.3

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Fujitsu

Test date: Feb-2011
Hardware Availability: Apr-2011
Software Availability: Sep-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	1313	59.5	1319	59.3	**1317**	**59.3**	8	935	83.6	938	83.4	**936**	**83.5**
401.bzip2	8	2723	28.4	**2711**	**28.5**	2710	28.5	4	1107	34.9	**1105**	**34.9**	1104	35.0
403.gcc	8	1634	39.4	**1634**	**39.4**	1643	39.2	8	**1499**	**43.0**	1511	42.6	1492	43.2
429.mcf	8	1517	48.1	**1517**	**48.1**	1520	48.0	4	588	62.1	582	62.6	**586**	**62.2**
445.gobmk	8	1230	68.2	**1227**	**68.4**	1226	68.4	8	1120	74.9	**1125**	**74.6**	1128	74.4
456.hmmer	8	1632	45.7	1633	45.7	**1632**	**45.7**	8	**1617**	**46.1**	1617	46.2	1619	46.1
458.sjeng	8	1837	52.7	1840	52.6	**1838**	**52.7**	8	1641	59.0	**1642**	**58.9**	1643	58.9
462.libquantum	8	**1261**	**131**	1262	131	1260	132	8	1183	140	1185	140	**1183**	**140**
464.h264ref	8	**1879**	**94.2**	1880	94.2	1879	94.2	8	**1767**	**100**	1764	100	1769	100
471.omnetpp	8	2230	22.4	**2235**	**22.4**	2238	22.3	8	2153	23.2	**2149**	**23.3**	2148	23.3
473.astar	8	1915	29.3	**1917**	**29.3**	1937	29.0	8	1851	30.3	1848	30.4	**1849**	**30.4**
483.xalancbmk	8	895	61.7	896	61.6	**895**	**61.6**	8	**878**	**62.8**	878	62.9	879	62.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
Oracle Solaris Studio 12.2 is distributed with mandatory OS patches
 118683-05  119963-20  120753-08
Oracle Solaris Studio 12.2 and patches are available at
 http://oracle.com/goto/solarisstudio
```

Submit Notes

```
Processes were assigned to specific processors using 'pbind'
commands.  The config file option 'submit' was used, along
with a list of processors in the 'BIND' variable, to generate
the pbind commands.  (For details, please see the config file.)
```

Operating System Notes

```
ulimit -s 131072 was used to limit the space
consumed by the stack (and therefore make more
space available to the heap).

System Tunables:
(/etc/system parameters)

    tune_t_fsflushr=10
       Controls how many seconds elapse between runs of the
       page flush daemon, fsflush.
```

Continued on next page

Operating System Notes (Continued)

```
      autoup=600
         Causes pages older than the listed number of seconds to
         be written by fsflush.
      bufhwm=3000
         Memory byte limit for caching I/O buffers.
      segmap_percent=1
         Set maximum percent memory for file system cache.

   Other System Settings:

       The "webconsole" service was turned off using
           svcadm disable webconsole
```

Platform Notes

```
    Memory is 2-way interleaved by filling all slots with
    the same capacity DIMMs.

   This result is measured on a SPARC Enterprise M3000 server from
   Fujitsu.  The SPARC Enterprise M3000 server from Oracle and from
   Fujitsu are electrically equivalent.
```

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-fast -xO4 -fma=fused -xipo=2 -xpagesize=4M -xcache=generic
-xalias_level=std -xunroll=12 -xprefetch=latx:0.5 -ll2amm

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
-library=stlport4 -M /usr/lib/ld/map.bssalign -fast -xO4 -fma=fused
-xipo=2 -xpagesize=4M -xcache=generic -xdepend
-xalias_level=compatible -xprefetch=latx:0.1 -lfast

Base Other Flags

C benchmarks:
-xjobs=2 -V -#

C++ benchmarks:
-xjobs=2 -verbose=diags,version

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=tcov:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=2 -xO4
-xalias_level=std -xrestrict -Xc -xprefetch=no%auto
-xunroll=6 -lfast -ll2amm -lbsdmalloc

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xalias_level=strong -xchip=generic
-xprefetch=latx:1.5 -xunroll=4 -ll2amm

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xalias_level=std -xO4
-xchip=generic -xprefetch_auto_type=indirect_array_access
-xprefetch_level=2 -xunroll=8 -ll2amm

429.mcf: -fast -fma=fused -xpagesize=4M -xipo=2
-xprefetch_auto_type=indirect_array_access
-xprefetch=latx:0.1 -W2,-Apf:llist=3 -W2,-Apf:noinnerllist
-Wc,-Qlp-prt=1 -Wc,-Qlp-prwt=3 -xunroll=5 -ll2amm

445.gobmk: -xprofile=tcov:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xalias_level=std -xrestrict
-xprefetch_auto_type=indirect_array_access -xunroll=2
-ll2amm

456.hmmer: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xalias_level=std -xprefetch_level=2
-xprefetch=latx:0.1 -xunroll=12

458.sjeng: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=2 -xO4
-xinline= -xprefetch=latx:0.1 -xunroll=8 -ll2amm

462.libquantum: -fast -fma=fused -xpagesize=4M -xalias_level=std -xipo=2
-xchip=generic -xprefetch_level=3 -xunroll=6 -lbsdmalloc
-ll2amm

464.h264ref: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xipo=2 -xalias_level=std -xlinkopt -ll2amm

C++ benchmarks:

471.omnetpp: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xalias_level=compatible
-M /usr/lib/ld/map.bssalign -xipo=1 -xO4
-Qoption cg -Qlp-av=0 -xprefetch=latx:1.2 -xunroll=5
-lfast

473.astar: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -fma=fused
-xpagesize=4M -xalias_level=compatible
-M /usr/lib/ld/map.bssalign -xipo=2 -xcache=generic
-xlinkopt -xprefetch=latx:0.1 -lfast

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `-library=stlport4 -xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast -fma=fused -xpagesize=4M -xalias_level=compatible -xipo=2 -xO4 -xcache=generic -xunroll=9 -lfast -lbsdmalloc`

Peak Other Flags

C benchmarks:
`-xjobs=2 -V -#`

C++ benchmarks:
`-xjobs=2 -verbose=diags,version`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.20110413.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.20110413.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 19:37:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 April 2011.