



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp®_rate2006 = 552

Acer AR585 F1 (AMD Opteron 6166 HE)

SPECfp_rate_base2006 = 511

CPU2006 license: 97


Test date: Mar-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jul-2010

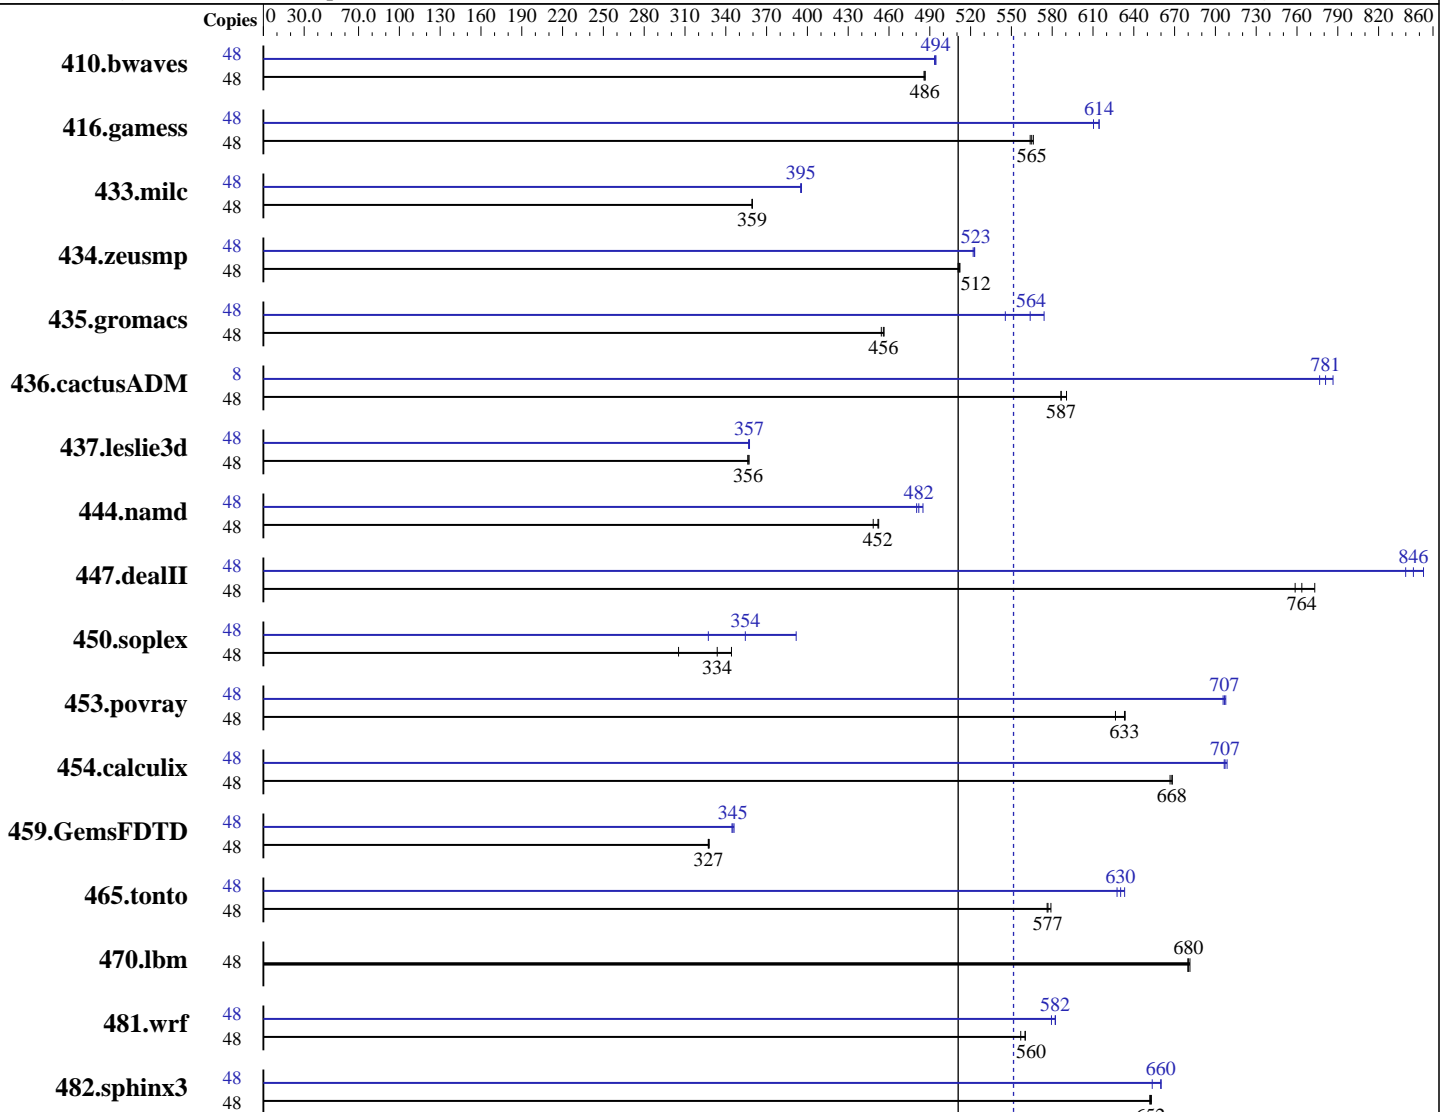

SPECfp_rate_base2006 = 511

SPECfp_rate2006 = 552

Hardware

CPU Name: AMD Opteron 6166 HE
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 SPI
 Kernel 2.6.32.12-0.7-default
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multiuser)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 552

Acer AR585 F1 (AMD Opteron 6166 HE)

SPECfp_rate_base2006 = 511

CPU2006 license: 97

Test date: Mar-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jul-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache: None
Memory: 128 GB (32 x 4 GB 2Rx8 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1343	486	1341	487	<u>1341</u>	<u>486</u>	48	<u>1320</u>	<u>494</u>	1322	493	1319	494
416.gamess	48	1660	566	<u>1664</u>	<u>565</u>	1667	564	48	1540	610	1529	615	<u>1530</u>	<u>614</u>
433.milc	48	1226	359	<u>1226</u>	<u>359</u>	1225	360	48	<u>1115</u>	<u>395</u>	1114	396	1115	395
434.zeusmp	48	<u>854</u>	<u>512</u>	855	511	853	512	48	835	523	837	522	<u>836</u>	<u>523</u>
435.gromacs	48	754	454	<u>752</u>	<u>456</u>	751	456	48	628	546	597	574	<u>608</u>	<u>564</u>
436.cactusADM	48	978	586	971	591	<u>978</u>	<u>587</u>	8	<u>122</u>	<u>781</u>	122	786	123	777
437.leslie3d	48	1266	356	1263	357	<u>1266</u>	<u>356</u>	48	1265	357	<u>1263</u>	<u>357</u>	1262	357
444.namd	48	859	448	<u>852</u>	<u>452</u>	851	452	48	<u>799</u>	<u>482</u>	801	480	794	485
447.dealII	48	<u>719</u>	<u>764</u>	710	773	724	759	48	644	853	654	840	<u>649</u>	<u>846</u>
450.soplex	48	1311	305	<u>1200</u>	<u>334</u>	1163	344	48	1224	327	<u>1130</u>	<u>354</u>	1022	392
453.povray	48	408	627	<u>403</u>	<u>633</u>	403	634	48	362	706	<u>361</u>	<u>707</u>	361	708
454.calculix	48	593	668	<u>593</u>	<u>668</u>	594	667	48	<u>560</u>	<u>707</u>	559	709	561	706
459.GemsFDTD	48	1557	327	1553	328	<u>1556</u>	<u>327</u>	48	1472	346	1478	345	<u>1475</u>	<u>345</u>
465.tonto	48	816	579	<u>819</u>	<u>577</u>	820	576	48	<u>749</u>	<u>630</u>	752	628	746	633
470.lbm	48	<u>970</u>	<u>680</u>	970	680	968	681	48	<u>970</u>	<u>680</u>	970	680	968	681
481.wrf	48	<u>957</u>	<u>560</u>	963	557	957	560	48	925	579	<u>921</u>	<u>582</u>	921	582
482.sphinx3	48	1435	652	<u>1434</u>	<u>652</u>	1433	653	48	1431	654	<u>1418</u>	<u>660</u>	1417	660

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=21600 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 552

Acer AR585 F1 (AMD Opteron 6166 HE)

SPECfp_rate_base2006 = 511

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jul-2010

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"

OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at

<http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18

This result was measured on the Gateway GR585 F1.

The Acer AR585 F1 and Gateway GR585 F1 are electronically equivalent.

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 552

Acer AR585 F1 (AMD Opteron 6166 HE)

SPECfp_rate_base2006 = 511

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jul-2010

Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 552

Acer AR585 F1 (AMD Opteron 6166 HE)

SPECfp_rate_base2006 = 511

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jul-2010

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 552

Acer AR585 F1 (AMD Opteron 6166 HE)

SPECfp_rate_base2006 = 511

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Jul-2010

Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -mso -Ofast
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0
-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on
-LNO:prefetch_ahead=30 -WOPT:unroll=2
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 19:00:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 April 2011.