SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X5 (Intel Xeon E7-4870)

SPECint®_rate2006 = 1070

SPECint_rate_base2006 = 1000

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2011
Hardware Availability: May-2011
Software Availability: Apr-2011

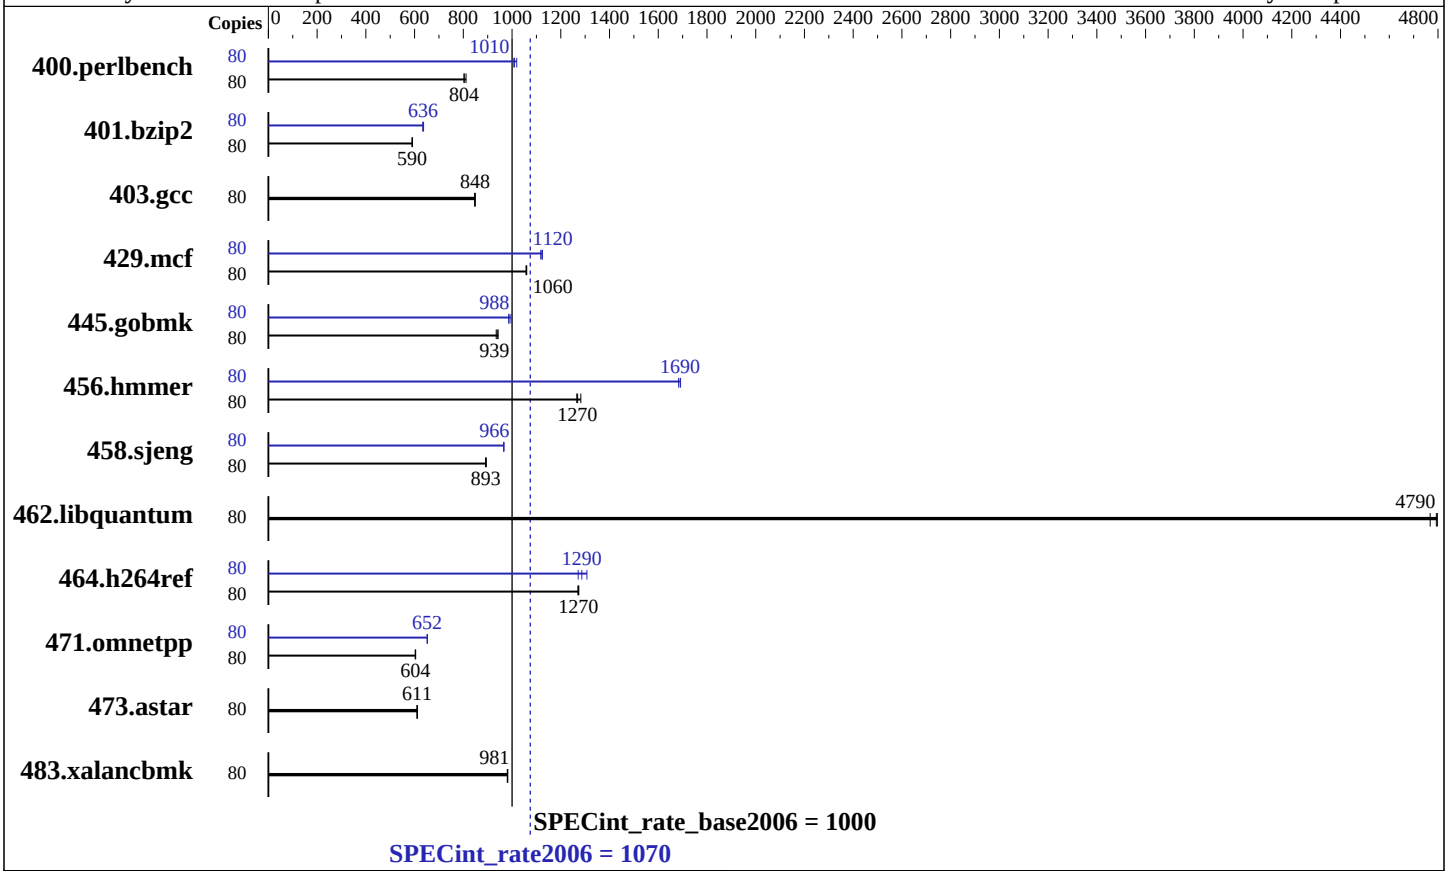

Hardware

CPU Name:	Intel Xeon E7-4870
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2,3,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (64 x 8 GB 4Rx8 PC3L-8500R-7, ECC)
Disk Subsystem:	2 x 146 GB SAS, 15000 RPM, RAID 0
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X5 (Intel Xeon E7-4870)

SPECint_rate2006 = 1070

SPECint_rate_base2006 = 1000

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2011
Hardware Availability: May-2011
Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	963	811	973	803	**973**	**804**	80	**774**	**1010**	767	1020	776	1010
401.bzip2	80	**1308**	**590**	1305	591	1309	590	80	1212	637	1219	633	**1214**	**636**
403.gcc	80	**759**	**848**	759	849	761	847	80	**759**	**848**	759	849	761	847
429.mcf	80	688	1060	690	1060	**689**	**1060**	80	649	1120	**650**	**1120**	653	1120
445.gobmk	80	898	935	**894**	**939**	890	943	80	851	986	**850**	**988**	843	996
456.hmmer	80	590	1270	**588**	**1270**	582	1280	80	443	1680	441	1690	**442**	**1690**
458.sjeng	80	**1084**	**893**	1083	894	1086	891	80	1001	967	**1002**	**966**	1003	965
462.libquantum	80	**346**	**4790**	348	4770	346	4800	80	**346**	**4790**	348	4770	346	4800
464.h264ref	80	**1391**	**1270**	1394	1270	1390	1270	80	1354	1310	1392	1270	**1376**	**1290**
471.omnetpp	80	**828**	**604**	830	603	828	604	80	767	652	**767**	**652**	767	652
473.astar	80	920	610	**919**	**611**	919	611	80	920	610	**919**	**611**	919	611
483.xalancbmk	80	**563**	**981**	563	980	562	983	80	**563**	**981**	563	980	562	983

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 52000 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
BIOS Settings:
Turbo Boost Power Optimization set to Traditional
```

General Notes

```
Binaries were compiled on RHEL5.5
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

Continued on next page

Peak Optimization Flags (Continued)

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.html`
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.xml`
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 18:44:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 April 2011.