



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®2006 = 39.1

Huawei XH620, Intel Xeon E5520

SPECfp_base2006 = 36.3

CPU2006 license: 3175


Test date: Apr-2011

Test sponsor: Huawei

Hardware Availability: Apr-2011

Tested by: Huawei

Software Availability: Jan-2011

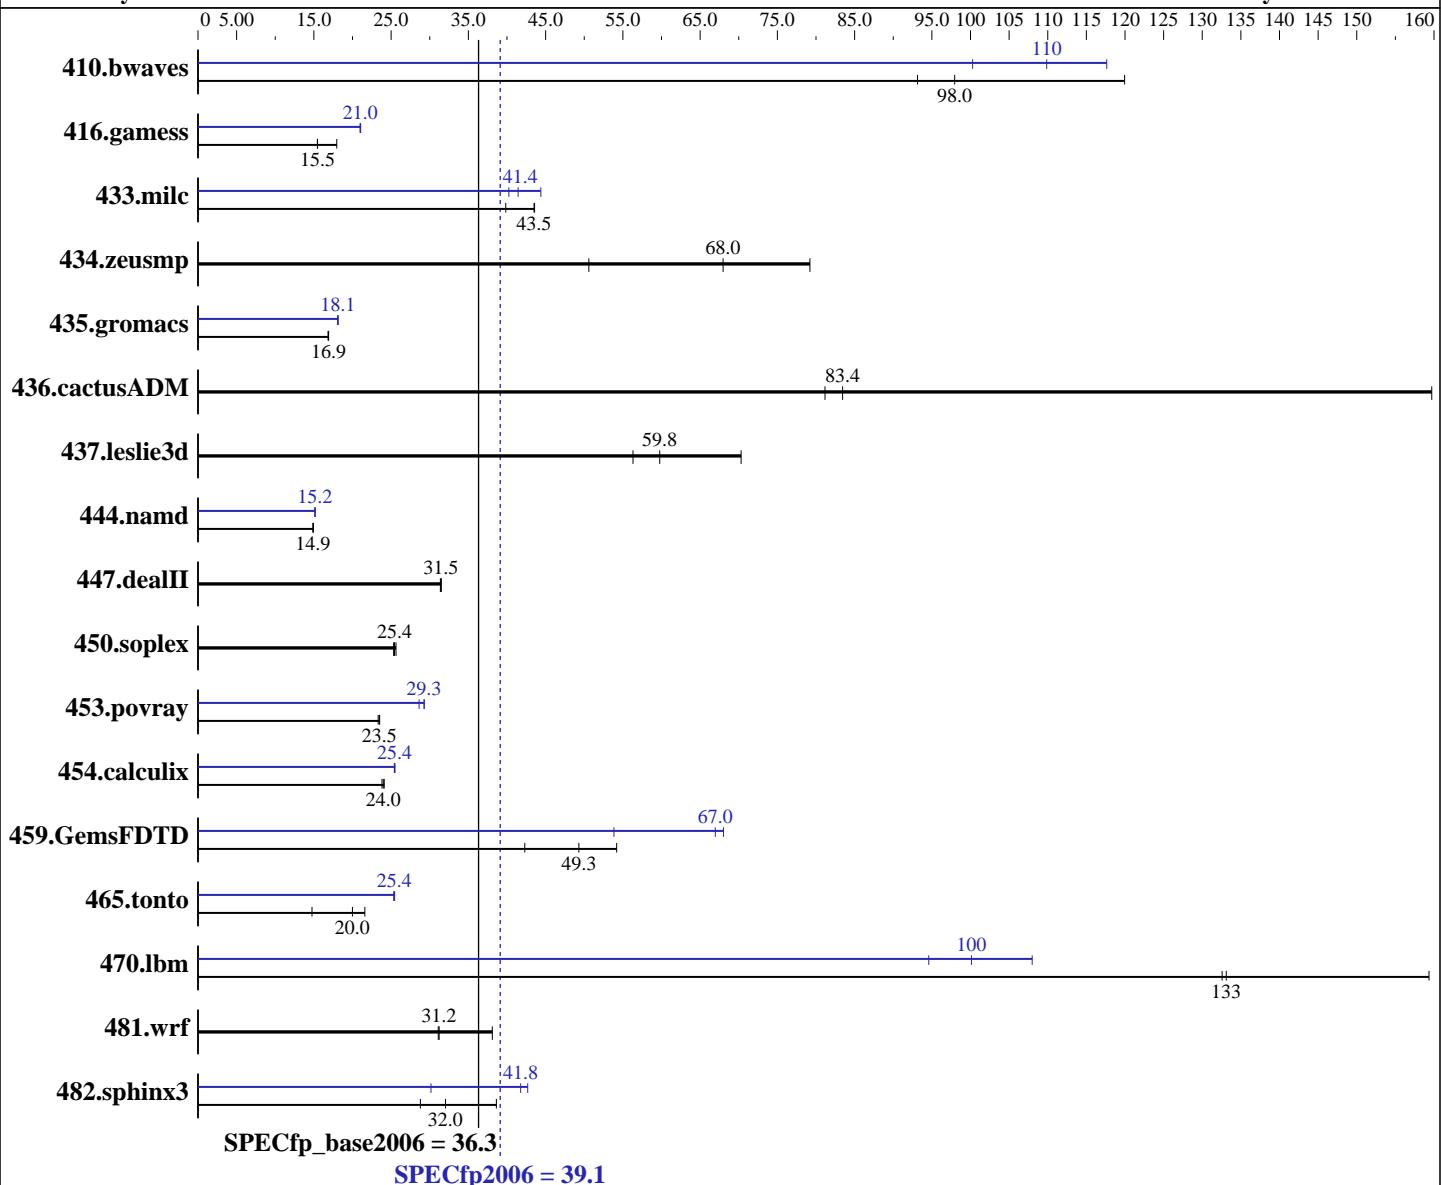

Hardware

CPU Name: Intel Xeon E5520
CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz: 2267
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12 Alpha Build 20110105
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 39.1

Huawei XH620,Intel Xeon E5520

SPECfp_base2006 = 36.3

CPU2006 license: 3175

Test date: Apr-2011

Test sponsor: Huawei

Hardware Availability: Apr-2011

Tested by: Huawei

Software Availability: Jan-2011

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 15K RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	113	120	139	98.0	146	93.1	116	118	136	100	124	110
416.gamess	1267	15.5	1265	15.5	1090	18.0	933	21.0	930	21.1	932	21.0
433.milc	230	39.8	211	43.6	211	43.5	228	40.2	207	44.4	222	41.4
434.zeusmp	115	79.2	180	50.6	134	68.0	115	79.2	180	50.6	134	68.0
435.gromacs	424	16.8	423	16.9	422	16.9	395	18.1	394	18.1	394	18.1
436.cactusADM	143	83.4	147	81.2	74.8	160	143	83.4	147	81.2	74.8	160
437.leslie3d	157	59.8	167	56.3	134	70.3	157	59.8	167	56.3	134	70.3
444.namd	538	14.9	538	14.9	538	14.9	530	15.1	529	15.2	529	15.2
447.dealII	363	31.5	365	31.4	363	31.5	363	31.5	365	31.4	363	31.5
450.soplex	329	25.3	328	25.4	325	25.6	329	25.3	328	25.4	325	25.6
453.povray	227	23.5	228	23.3	226	23.5	182	29.3	186	28.6	182	29.3
454.calculix	346	23.8	342	24.1	344	24.0	323	25.5	324	25.4	325	25.4
459.GemsFDTD	251	42.3	215	49.3	196	54.2	158	67.0	156	68.0	197	53.8
465.tonto	492	20.0	456	21.6	667	14.8	388	25.3	387	25.4	387	25.5
470.lbm	103	133	86.2	159	104	133	127	108	137	100	145	94.6
481.wrf	293	38.1	359	31.1	358	31.2	293	38.1	359	31.1	358	31.2
482.sphinx3	677	28.8	505	38.6	608	32.0	646	30.2	467	41.8	457	42.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
 Hugepages were not configured on the system.

Platform Notes

Data Reuse Optimization disabled in BIOS Setup.

General Notes

Binaries compiled on RHEL 5.5
 OMP_NUM_THREADS set to number of cores



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 39.1

Huawei XH620, Intel Xeon E5520

SPECfp_base2006 = 36.3

CPU2006 license: 3175

Test date: Apr-2011

Test sponsor: Huawei

Hardware Availability: Apr-2011

Tested by: Huawei

Software Availability: Jan-2011

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 39.1

Huawei XH620, Intel Xeon E5520

SPECfp_base2006 = 36.3

CPU2006 license: 3175

Test date: Apr-2011

Test sponsor: Huawei

Hardware Availability: Apr-2011

Tested by: Huawei

Software Availability: Jan-2011

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
           -ansi-alias
```

```
470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -parallel
           -ansi-alias -static -auto-ilp32
```

```
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
              -parallel
```

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
             -B /usr/share/libhugetlbfsl -Wl,-melf_x86_64 -Wl,-hugetlbfsl-link=BDT
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 39.1

Huawei XH620,Intel Xeon E5520

SPECfp_base2006 = 36.3

CPU2006 license: 3175

Test date: Apr-2011

Test sponsor: Huawei

Hardware Availability: Apr-2011

Tested by: Huawei

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel  
           -static  
  
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
           -inline-level=0 -scalar-rep- -static  
  
434.zeusmp: basepeak = yes  
  
437.leslie3d: basepeak = yes  
  
459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
           -inline-level=0 -opt-prefetch -parallel  
           -B /usr/share/libhugetlbfsl -Wl,-melf_x86_64 -Wl,-hugetlbfsl-link=BDT  
  
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
           -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
           -opt-malloc-options=3 -auto -unroll14  
           -B /usr/share/libhugetlbfsl -Wl,-melf_x86_64 -Wl,-hugetlbfsl-link=BDT
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
           -ansi-alias  
  
436.cactusADM: basepeak = yes  
  
454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias  
  
481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revA.html>
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revA.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 39.1

Huawei XH620,Intel Xeon E5520

SPECfp_base2006 = 36.3

CPU2006 license: 3175

Test date: Apr-2011

Test sponsor: Huawei

Hardware Availability: Apr-2011

Tested by: Huawei

Software Availability: Jan-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:12:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 May 2011.