



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

## SPECfp<sup>®</sup>\_rate2006 = 224

## Acer AR380 F1 (Intel Xeon X5667)

## SPECfp\_rate\_base2006 = 219

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Apr-2011

Hardware Availability: Jun-2010

Software Availability: Jan-2011

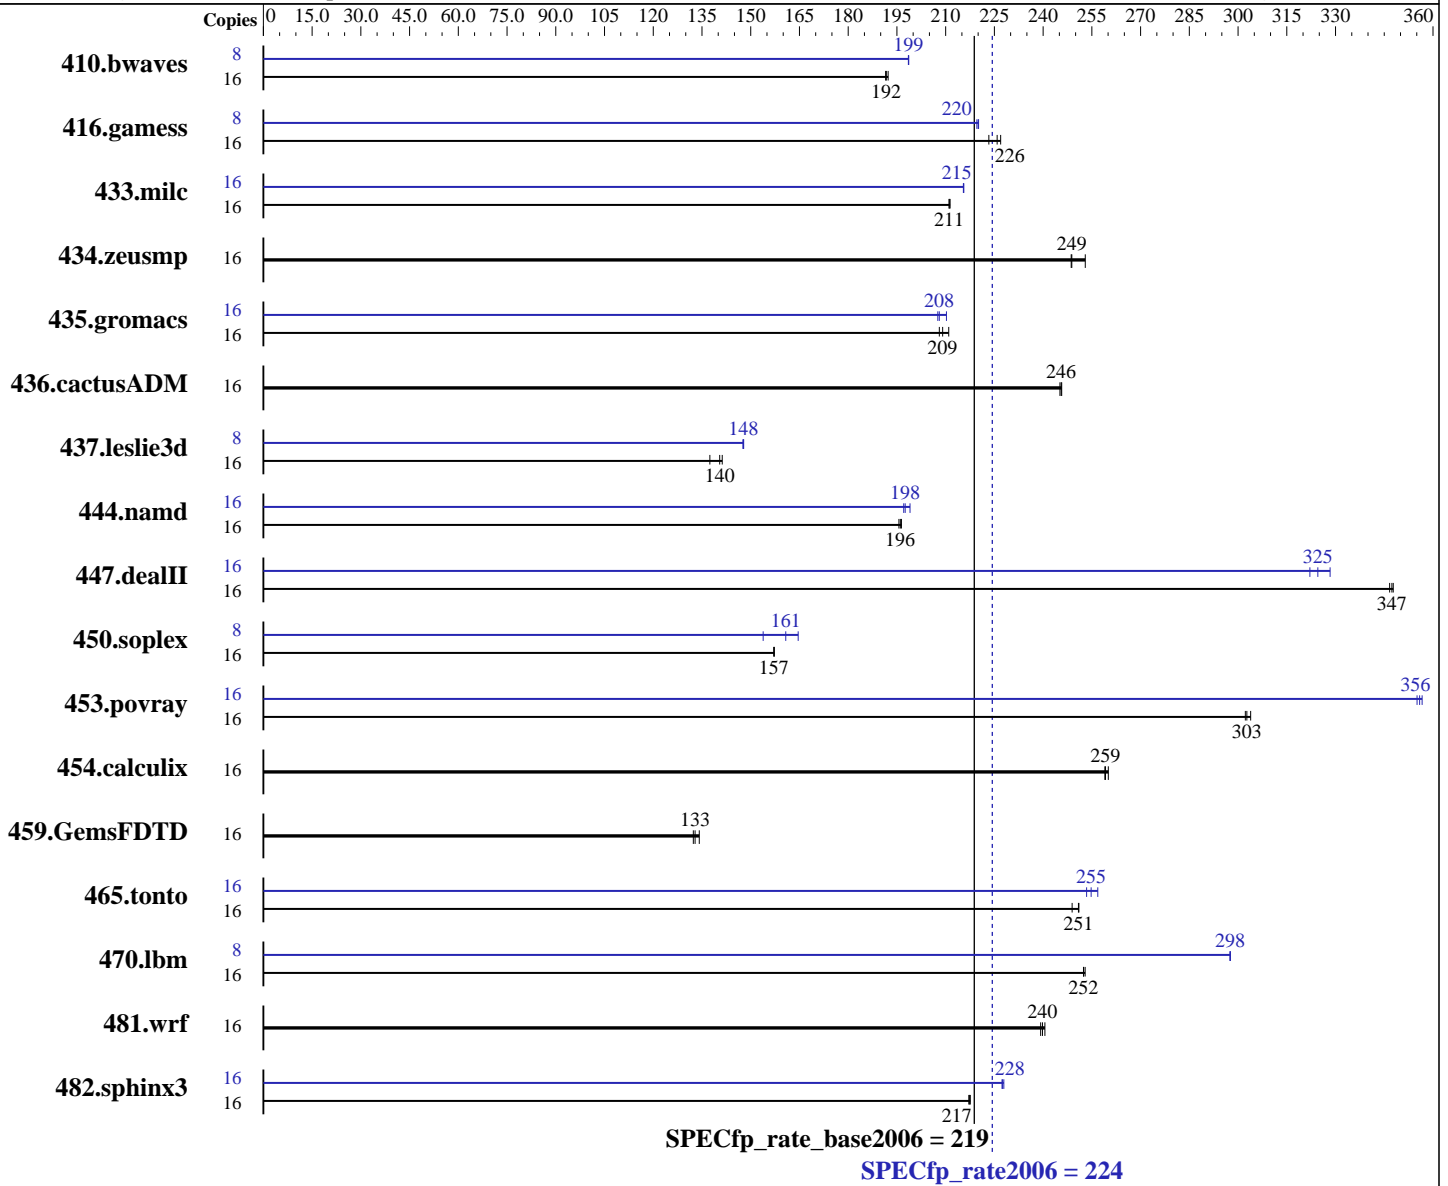

### Hardware

CPU Name: Intel Xeon X5667  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz  
 CPU MHz: 3067  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 224

Acer AR380 F1 (Intel Xeon X5667)

SPECfp\_rate\_base2006 = 219

CPU2006 license: 97  
Test sponsor: Acer Incorporated  
Tested by: Acer Incorporated

Test date: Apr-2011  
Hardware Availability: Jun-2010  
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 300 GB SATA, 10000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1131	192	<u>1134</u>	<u>192</u>	1135	192	8	547	199	548	199	<u>547</u>	<u>199</u>
416.gamess	16	<u>1387</u>	<u>226</u>	1381	227	1403	223	8	<u>712</u>	<u>220</u>	713	220	712	220
433.milc	16	<u>696</u>	<u>211</u>	695	211	696	211	16	<u>682</u>	<u>215</u>	681	216	682	215
434.zeusmp	16	576	253	<u>585</u>	<u>249</u>	586	249	16	576	253	<u>585</u>	<u>249</u>	586	249
435.gromacs	16	542	211	<u>546</u>	<u>209</u>	549	208	16	543	210	550	208	<u>549</u>	<u>208</u>
436.cactusADM	16	780	245	778	246	<u>779</u>	<u>246</u>	16	780	245	778	246	<u>779</u>	<u>246</u>
437.leslie3d	16	1065	141	<u>1071</u>	<u>140</u>	1094	137	8	509	148	<u>509</u>	<u>148</u>	510	148
444.namd	16	653	196	<u>655</u>	<u>196</u>	656	196	16	645	199	<u>650</u>	<u>198</u>	651	197
447.dealII	16	528	347	<u>527</u>	<u>347</u>	526	348	16	<u>564</u>	<u>325</u>	557	328	568	322
450.soplex	16	849	157	<u>849</u>	<u>157</u>	849	157	8	434	154	<u>415</u>	<u>161</u>	405	165
453.povray	16	<u>281</u>	<u>303</u>	282	302	280	304	16	<u>239</u>	<u>356</u>	240	355	239	357
454.calculix	16	508	260	510	259	<u>509</u>	<u>259</u>	16	508	260	510	259	<u>509</u>	<u>259</u>
459.GemsFDTD	16	1265	134	1283	132	<u>1278</u>	<u>133</u>	16	1265	134	1283	132	<u>1278</u>	<u>133</u>
465.tonto	16	<u>628</u>	<u>251</u>	632	249	627	251	16	613	257	621	253	<u>618</u>	<u>255</u>
470.lbm	16	869	253	<u>871</u>	<u>252</u>	871	252	8	<u>369</u>	<u>298</u>	369	298	369	298
481.wrf	16	<u>745</u>	<u>240</u>	747	239	743	241	16	<u>745</u>	<u>240</u>	747	239	743	241
482.sphinx3	16	1433	218	1436	217	<u>1435</u>	<u>217</u>	16	1372	227	1368	228	<u>1371</u>	<u>228</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
Large pages were disabled for this run

## Platform Notes

BIOS Settings:  
Fan speed = full speed (Default = Balanced)  
Data Reuse = Disabled (Default = Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 224

Acer AR380 F1 (Intel Xeon X5667)

SPECfp\_rate\_base2006 = 219

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Apr-2011

Hardware Availability: Jun-2010

Software Availability: Jan-2011

## General Notes

Binaries compiled on RHEL5.5

This result was measured on the Gateway GR380 F1.

The Acer AR360 F1, AR380 F1, Gateway GR360 F1 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 224**

**Acer AR380 F1 (Intel Xeon X5667)**

**SPECfp\_rate\_base2006 = 219**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Apr-2011

**Hardware Availability:** Jun-2010

**Software Availability:** Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3:icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex:icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
 416.gamess: `-DSPEC_CPU_LP64`  
 433.milc: `-DSPEC_CPU_LP64`  
 434.zeusmp: `-DSPEC_CPU_LP64`  
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
 437.leslie3d: `-DSPEC_CPU_LP64`  
 444.namd: `-DSPEC_CPU_LP64`  
 447.dealII: `-DSPEC_CPU_LP64`  
 453.povray: `-DSPEC_CPU_LP64`  
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
 459.GemsFDTD: `-DSPEC_CPU_LP64`  
 465.tonto: `-DSPEC_CPU_LP64`  
 470.lbm: `-DSPEC_CPU_LP64`  
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 224

Acer AR380 F1 (Intel Xeon X5667)

SPECfp\_rate\_base2006 = 219

CPU2006 license: 97

Test date: Apr-2011

Test sponsor: Acer Incorporated

Hardware Availability: Jun-2010

Tested by: Acer Incorporated

Software Availability: Jan-2011

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 224**

**Acer AR380 F1 (Intel Xeon X5667)**

**SPECfp\_rate\_base2006 = 219**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Apr-2011

**Hardware Availability:** Jun-2010

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 20:50:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 May 2011.