SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL465 (Intel Xeon E7520, 1.87 GHz)

SPECint®2006 = 24.0

SPECint_base2006 = 23.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2011
Hardware Availability: Jan-2011
Software Availability: Nov-2010

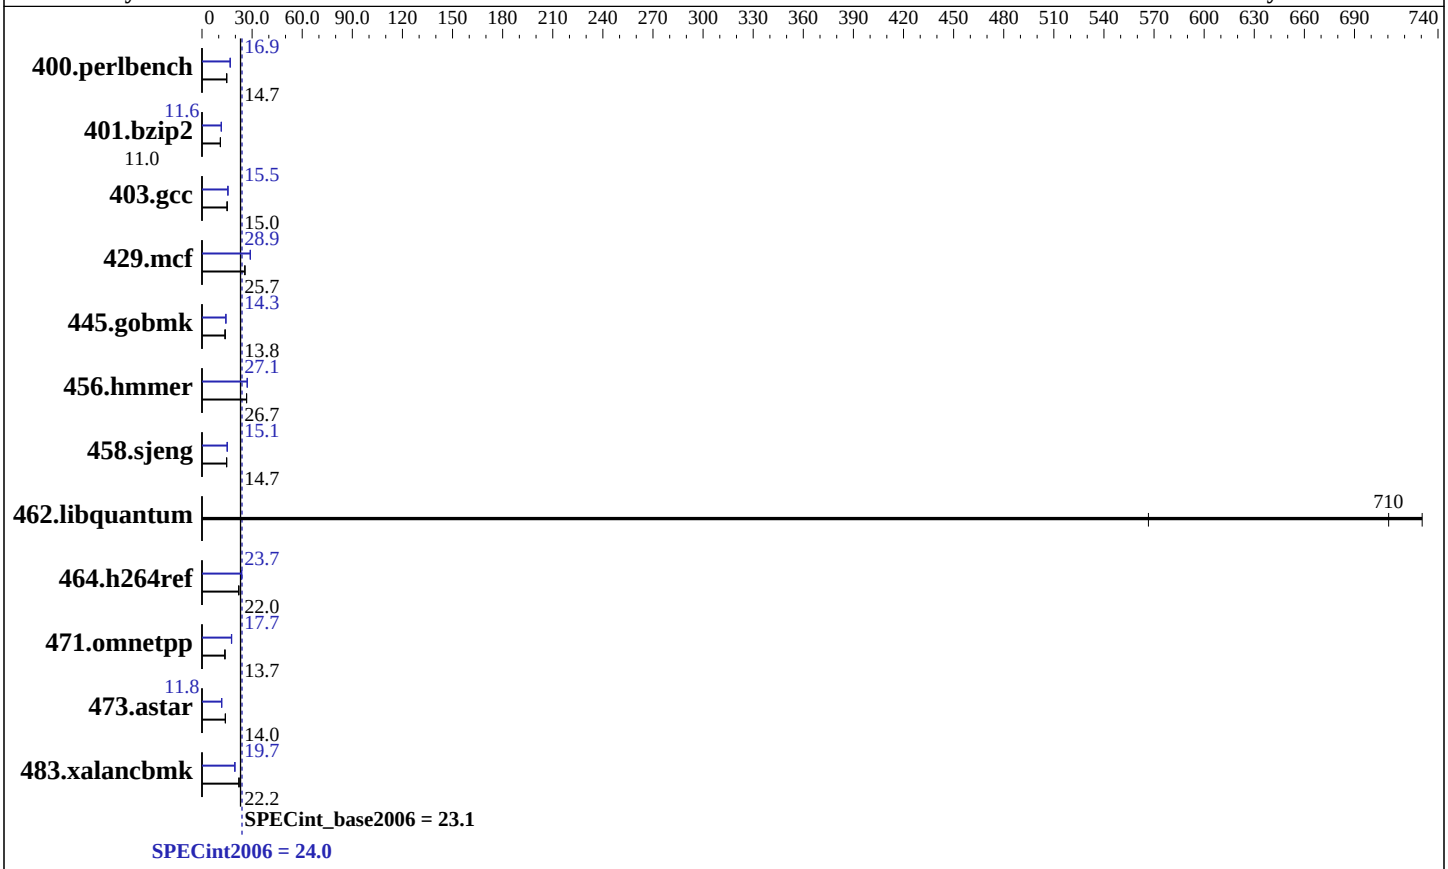

Hardware

CPU Name:	Intel Xeon E7520
CPU Characteristics:	
CPU MHz:	1866
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	18 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 4Rx8 PC3-8500R-7, ECC, running at 800 MHz)
Disk Subsystem:	2 x 50 GB SATA, SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

BL465 (Intel Xeon E7520, 1.87 GHz)

SPECint2006 = 24.0

SPECint_base2006 = 23.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2011
Hardware Availability: Jan-2011
Software Availability: Nov-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**664**	**14.7**	665	14.7	655	14.9	**578**	**16.9**	578	16.9	579	16.9
401.bzip2	876	11.0	**876**	**11.0**	876	11.0	835	11.6	**835**	**11.6**	835	11.6
403.gcc	533	15.1	**535**	**15.0**	536	15.0	**518**	**15.5**	521	15.5	518	15.6
429.mcf	356	25.6	**355**	**25.7**	354	25.7	316	28.9	315	29.0	**316**	**28.9**
445.gobmk	750	14.0	764	13.7	**760**	**13.8**	**734**	**14.3**	734	14.3	734	14.3
456.hmmer	350	26.7	349	26.7	**349**	**26.7**	**345**	**27.1**	345	27.1	344	27.1
458.sjeng	**822**	**14.7**	822	14.7	817	14.8	**799**	**15.1**	799	15.2	804	15.0
462.libquantum	36.6	567	**29.2**	**710**	28.4	731	36.6	567	**29.2**	**710**	28.4	731
464.h264ref	**1006**	**22.0**	1002	22.1	1009	21.9	931	23.8	**932**	**23.7**	933	23.7
471.omnetpp	**455**	**13.7**	459	13.6	452	13.8	355	17.6	352	17.8	**353**	**17.7**
473.astar	502	14.0	501	14.0	**502**	**14.0**	595	11.8	**595**	**11.8**	596	11.8
483.xalancbmk	310	22.2	314	22.0	**310**	**22.2**	351	19.7	351	19.7	**351**	**19.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Hugepages was enabled with the following:
  'nodev   /mnt/hugepages   hugetlbfs  defaults   0 0' added to /etc/fstab
   echo 900 > /proc/sys/vm/nr_hugepages
   export HUGETLB_MORECORE=yes
   export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
Power C-states enabled in BIOS
Demand Scrub disabled in BIOS
```

General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries were compiled on RHEL5.5
```

Base Compiler Invocation

C benchmarks:

```
icc  -m64
```

C++ benchmarks:

```
icpc -m64
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/smartheap -lsmartheap -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/smartheap -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/smartheap -lsmartheap -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.html
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.xml
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:09:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 May 2011.