



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

### SPECfp®\_rate2006 = 263

### ACTINA SOLAR 232 S4+ (Intel Xeon X5680)

### SPECfp\_rate\_base2006 = 256

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: May-2011

Hardware Availability: Apr-2010

Software Availability: Jan-2011

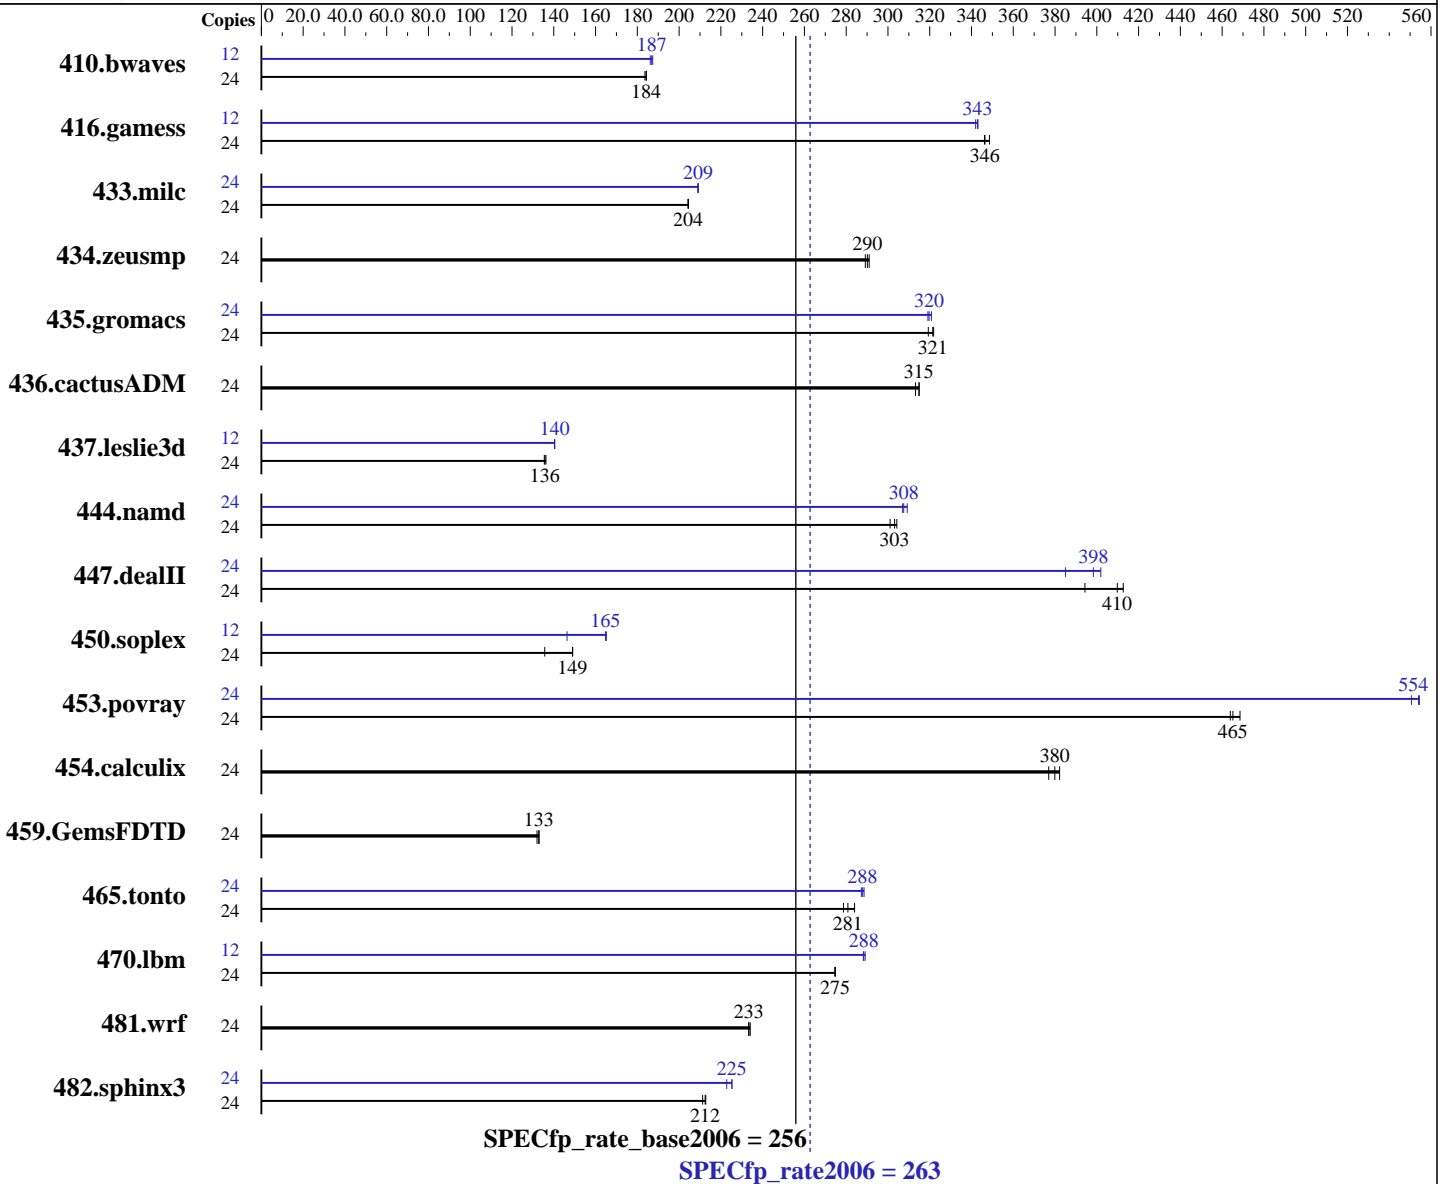

### Hardware

CPU Name: Intel Xeon X5680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SuSe Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 263**

**ACTINA SOLAR 232 S4+ (Intel Xeon X5680)**

**SPECfp\_rate\_base2006 = 256**

**CPU2006 license:** 9008

**Test date:** May-2011

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Apr-2010

**Tested by:** ACTION S.A.

**Software Availability:** Jan-2011

**L3 Cache:** 12 MB I+D on chip per chip  
**Other Cache:** None  
**Memory:** 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
**Disk Subsystem:** 1 x 500 GB SATA, 7200 RPM  
**Other Hardware:** None

**Peak Pointers:** 32/64-bit  
**Other Software:** None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1769	184	<u>1771</u>	<u>184</u>	1776	184	12	870	187	<u>873</u>	<u>187</u>	876	186
416.gamess	24	1348	349	<u>1356</u>	<u>346</u>	1357	346	12	685	343	687	342	<u>685</u>	<u>343</u>
433.milc	24	1078	204	1078	204	<u>1078</u>	<u>204</u>	24	1054	209	1053	209	<u>1054</u>	<u>209</u>
434.zeusmp	24	750	291	<u>753</u>	<u>290</u>	755	289	24	750	291	<u>753</u>	<u>290</u>	755	289
435.gromacs	24	<u>533</u>	<u>321</u>	537	319	532	322	24	537	319	534	321	<u>536</u>	<u>320</u>
436.cactusADM	24	<u>911</u>	<u>315</u>	916	313	911	315	24	<u>911</u>	<u>315</u>	916	313	911	315
437.leslie3d	24	1665	135	<u>1662</u>	<u>136</u>	1656	136	12	<u>803</u>	<u>140</u>	803	140	804	140
444.namd	24	639	301	<u>635</u>	<u>303</u>	633	304	24	<u>626</u>	<u>308</u>	627	307	622	309
447.dealII	24	<u>670</u>	<u>410</u>	696	394	665	413	24	683	402	<u>689</u>	<u>398</u>	713	385
450.soplex	24	1475	136	1343	149	<u>1343</u>	<u>149</u>	12	684	146	606	165	<u>607</u>	<u>165</u>
453.povray	24	<u>274</u>	<u>465</u>	273	469	275	464	24	230	554	<u>230</u>	<u>554</u>	232	551
454.calculix	24	518	382	<u>521</u>	<u>380</u>	525	377	24	518	382	<u>521</u>	<u>380</u>	525	377
459.GemsFDTD	24	1929	132	1915	133	<u>1918</u>	<u>133</u>	24	1929	132	1915	133	<u>1918</u>	<u>133</u>
465.tonto	24	<u>841</u>	<u>281</u>	832	284	847	279	24	822	287	818	289	<u>820</u>	<u>288</u>
470.lbm	24	<u>1200</u>	<u>275</u>	1200	275	1201	275	12	<u>572</u>	<u>288</u>	570	289	572	288
481.wrf	24	1145	234	<u>1148</u>	<u>233</u>	1149	233	24	1145	234	<u>1148</u>	<u>233</u>	1149	233
482.sphinx3	24	2214	211	<u>2202</u>	<u>212</u>	2198	213	24	2099	223	2076	225	<u>2077</u>	<u>225</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 263**

**ACTINA SOLAR 232 S4+ (Intel Xeon X5680)**

**SPECfp\_rate\_base2006 = 256**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** May-2011

**Hardware Availability:** Apr-2010

**Software Availability:** Jan-2011

## General Notes

Binaries compiled on RHEL5.5 with  
binutils-2.17.50.0.6-14.el5

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 263**

**ACTINA SOLAR 232 S4+ (Intel Xeon X5680)**

**SPECfp\_rate\_base2006 = 256**

**CPU2006 license:** 9008

**Test date:** May-2011

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Apr-2010

**Tested by:** ACTION S.A.

**Software Availability:** Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3:icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex:icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
 416.gamess: `-DSPEC_CPU_LP64`  
 433.milc: `-DSPEC_CPU_LP64`  
 434.zeusmp: `-DSPEC_CPU_LP64`  
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
 437.leslie3d: `-DSPEC_CPU_LP64`  
 444.namd: `-DSPEC_CPU_LP64`  
 447.dealII: `-DSPEC_CPU_LP64`  
 453.povray: `-DSPEC_CPU_LP64`  
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
 459.GemsFDTD: `-DSPEC_CPU_LP64`  
 465.tonto: `-DSPEC_CPU_LP64`  
 470.lbm: `-DSPEC_CPU_LP64`  
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 263**

**ACTINA SOLAR 232 S4+ (Intel Xeon X5680)**

**SPECfp\_rate\_base2006 = 256**

**CPU2006 license:** 9008

**Test date:** May-2011

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Apr-2010

**Tested by:** ACTION S.A.

**Software Availability:** Jan-2011

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 263**

**ACTINA SOLAR 232 S4+ (Intel Xeon X5680)**

**SPECfp\_rate\_base2006 = 256**

**CPU2006 license:** 9008

**Test date:** May-2011

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Apr-2010

**Tested by:** ACTION S.A.

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/ACTION-platform-linux64.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/ACTION-platform-linux64.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:14:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2011.