SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML110 G7 (3.50 GHz Intel Xeon E3-1280)

SPECint®_rate2006 = 165

SPECint_rate_base2006 = 157

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2011
Hardware Availability: Mar-2011
Software Availability: Dec-2010

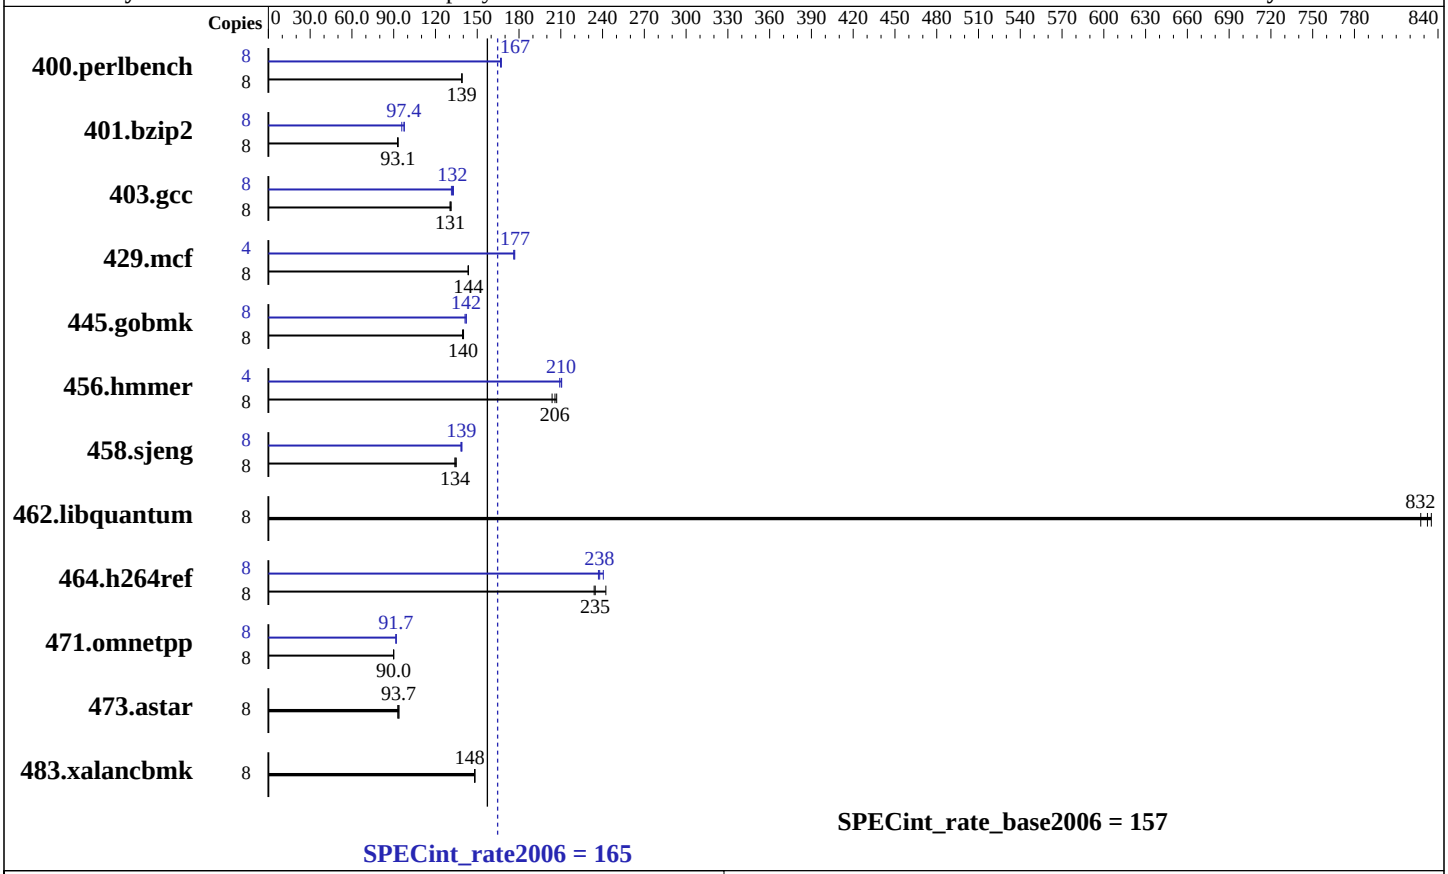

Hardware

CPU Name:	Intel Xeon E3-1280
CPU Characteristics:	Intel Turbo Boost Technology up to 3.90 GHz
CPU MHz:	3500
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (4 x 4 GB 2Rx8 PC3-10600E-9, ECC)
Disk Subsystem:	1 x 250 GB 7.2 K SATA
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML110 G7 (3.50 GHz Intel Xeon E3-1280)

SPECint_rate2006 = 165

SPECint_rate_base2006 = 157

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2011
Hardware Availability: Mar-2011
Software Availability: Dec-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	563	139	**562**	**139**	562	139	8	**468**	**167**	469	167	467	167
401.bzip2	8	833	92.7	**830**	**93.1**	829	93.1	8	791	97.6	**793**	**97.4**	806	95.8
403.gcc	8	493	131	**493**	**131**	491	131	8	490	131	485	133	**487**	**132**
429.mcf	8	508	144	509	143	**508**	**144**	4	**207**	**177**	206	177	207	176
445.gobmk	8	599	140	602	139	**600**	**140**	8	590	142	**591**	**142**	594	141
456.hmmer	8	366	204	**363**	**206**	360	207	4	178	209	177	211	**177**	**210**
458.sjeng	8	722	134	717	135	**721**	**134**	8	700	138	696	139	**698**	**139**
462.libquantum	8	**199**	**832**	200	828	198	835	8	**199**	**832**	200	828	198	835
464.h264ref	8	757	234	730	242	**754**	**235**	8	736	241	**744**	**238**	747	237
471.omnetpp	8	555	90.0	556	89.9	**556**	**90.0**	8	544	91.8	**545**	**91.7**	546	91.6
473.astar	8	599	93.7	604	92.9	**599**	**93.7**	8	599	93.7	604	92.9	**599**	**93.7**
483.xalancbmk	8	373	148	**372**	**148**	372	148	8	373	148	**372**	**148**	372	148

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
numactl was used to bind copies to the cores
The config file option 'submit' was used.
```

Operating System Notes

```
'nodev   /mnt/hugepages   hugetlbfs   defaults   0 0' added to /etc/fstab
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 3600 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
BIOS configuration:
 HP Power Profile set to Maximum Performance
 Thermal Configuration set to Increased Cooling
```

General Notes

```
Binaries compiled on RHEL5.5
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

C++ benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xAVX -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-auto-ilp32

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html
http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml
http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:01:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 May 2011.