SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1017C-TF (X9SCL-F, Intel Xeon E3-1230)

SPECfp®2006 = 53.6

SPECfp_base2006 = 49.0

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2011
Hardware Availability: Apr-2011
Software Availability: Apr-2011

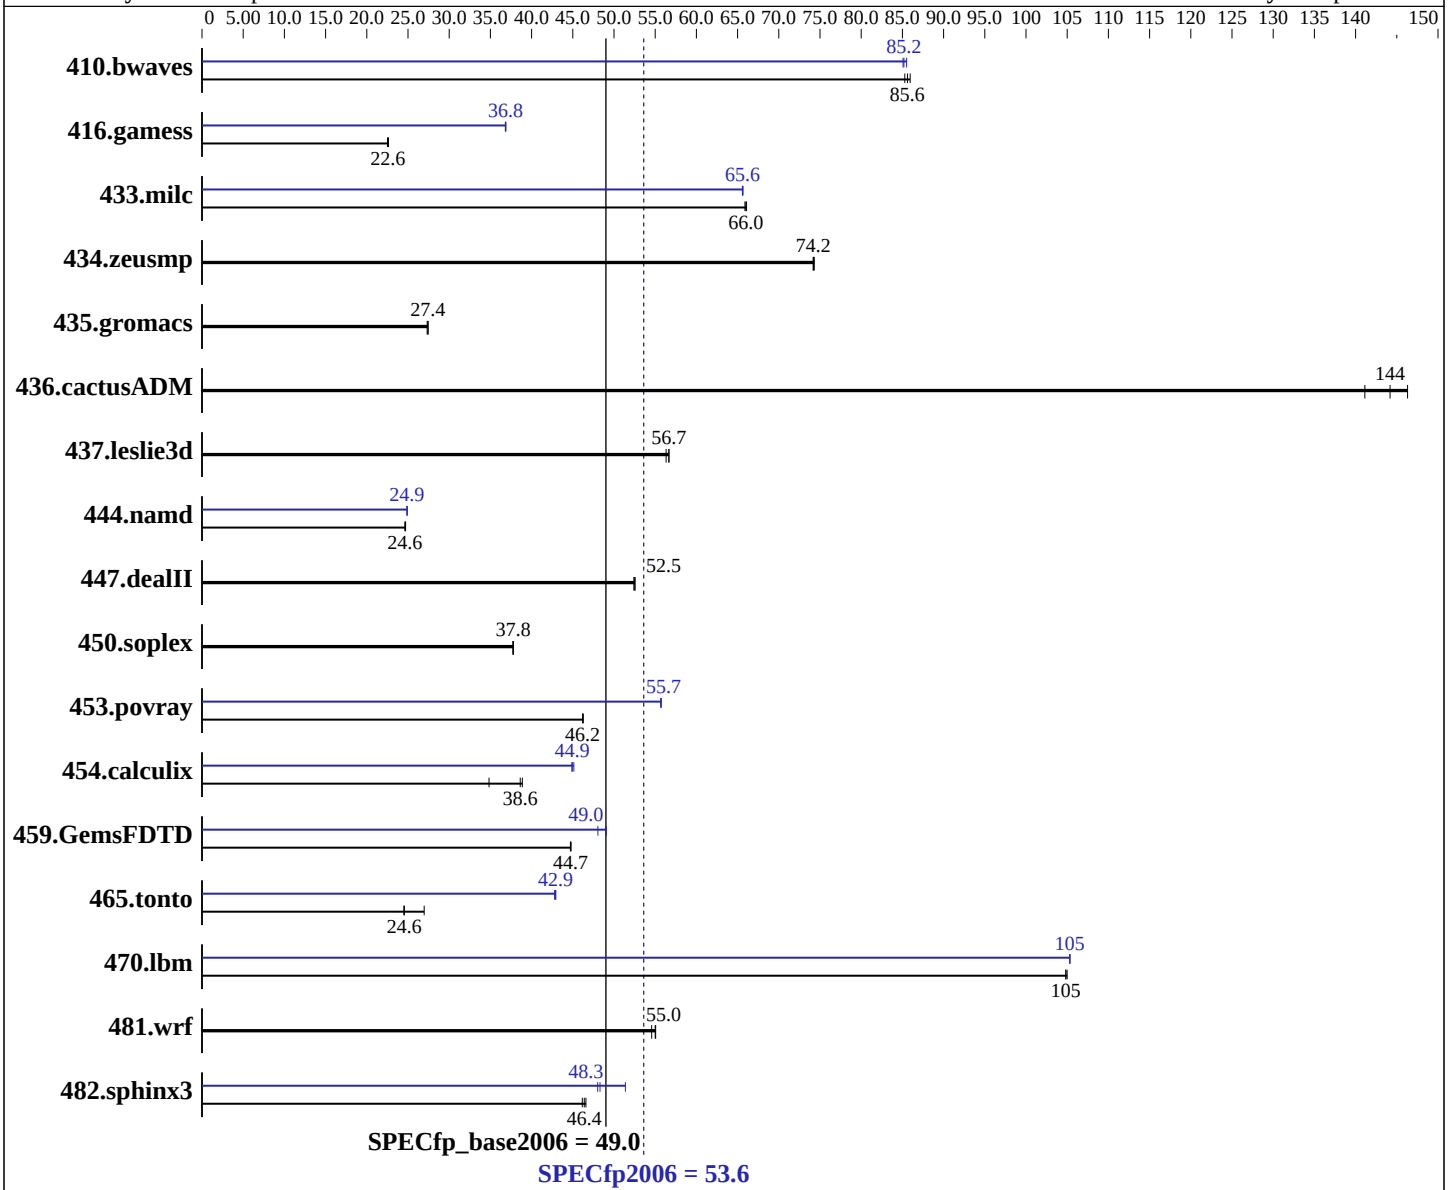

Hardware

CPU Name:	Intel Xeon E3-1230
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1 Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12 Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3
Auto Parallel:	Yes
File System:	ext3

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1017C-TF (X9SCL-F, Intel Xeon E3-1230)

SPECfp2006 = 53.6

SPECfp_base2006 = 49.0

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2011
Hardware Availability: Apr-2011
Software Availability: Apr-2011

L3 Cache:	8 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other Cache:	None	Base Pointers:	64-bit
Memory:	16 GB (4 x 4 GB 2Rx8 PC3-10600E-9, ECC)	Peak Pointers:	32/64-bit
Disk Subsystem:	1 x 500 GB SATA II, 7200 RPM	Other Software:	None
Other Hardware:	None		

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	158	85.9	**159**	**85.6**	159	85.3	159	85.5	160	85.1	**160**	**85.2**
416.gamess	**867**	**22.6**	865	22.6	870	22.5	531	36.9	532	36.8	**532**	**36.8**
433.milc	139	66.1	139	65.9	**139**	**66.0**	140	65.7	**140**	**65.6**	140	65.6
434.zeusmp	**123**	**74.2**	123	74.2	122	74.3	**123**	**74.2**	123	74.2	122	74.3
435.gromacs	**260**	**27.4**	260	27.4	261	27.3	**260**	**27.4**	260	27.4	261	27.3
436.cactusADM	**82.9**	**144**	81.7	146	84.7	141	**82.9**	**144**	81.7	146	84.7	141
437.leslie3d	167	56.3	166	56.7	**166**	**56.7**	167	56.3	166	56.7	**166**	**56.7**
444.namd	326	24.6	**325**	**24.6**	325	24.7	322	24.9	322	24.9	**322**	**24.9**
447.dealII	218	52.6	**218**	**52.5**	218	52.4	218	52.6	**218**	**52.5**	218	52.4
450.soplex	221	37.7	221	37.8	**221**	**37.8**	221	37.7	221	37.8	**221**	**37.8**
453.povray	115	46.2	**115**	**46.2**	115	46.3	**95.5**	**55.7**	95.5	55.7	95.5	55.7
454.calculix	**214**	**38.6**	237	34.8	212	38.9	184	44.9	**184**	**44.9**	183	45.1
459.GemsFDTD	237	44.8	**237**	**44.7**	237	44.7	216	49.1	**216**	**49.0**	221	48.0
465.tonto	365	27.0	402	24.5	**401**	**24.6**	**229**	**42.9**	230	42.8	229	42.9
470.lbm	131	105	131	105	**131**	**105**	130	105	130	105	**130**	**105**
481.wrf	**203**	**55.0**	205	54.6	203	55.1	**203**	**55.0**	205	54.6	203	55.1
482.sphinx3	**420**	**46.4**	422	46.2	418	46.6	379	51.4	**404**	**48.3**	406	48.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Hugepages was enabled with the following:
nodev   /mnt/hugepages   hugetlbfs  defaults   0 0' added to /etc/fstab
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
```

Platform Notes

```
Fan speed set to Full Speed in BIOS Setup.
```

General Notes

```
OMP_NUM_THREADS set to number of cores
Binaries compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -parallel
-ansi-alias -static -auto-ilp32

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:41:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 May 2011.