



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint®\_rate2006 = Not Run**

PowerEdge R810 (Intel Xeon E7-2870, 2.40 GHz)

**SPECint\_rate\_base2006 = 488**

CPU2006 license: 55


Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

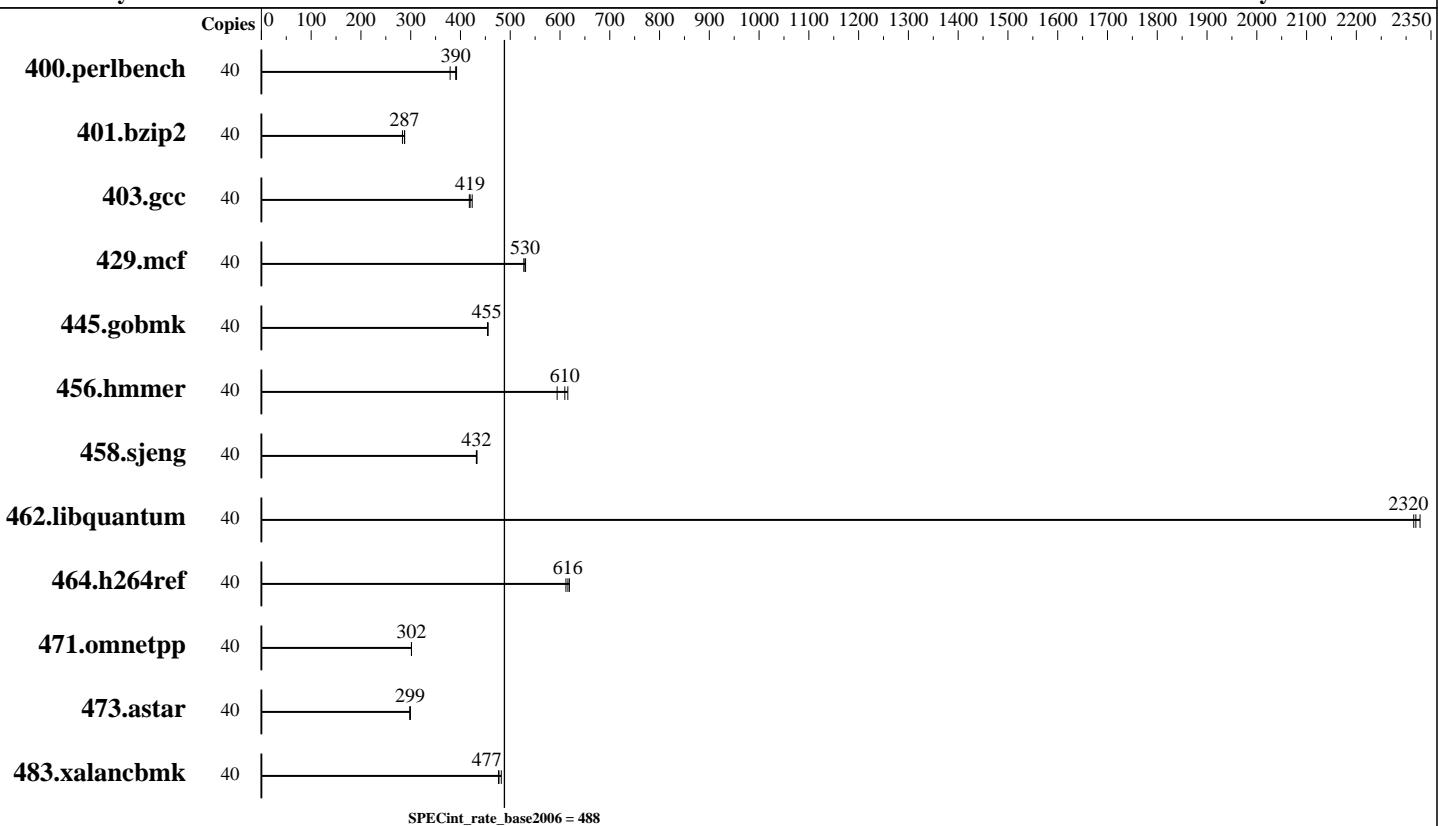

## Hardware

CPU Name: Intel Xeon E7-2870  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 4Rx8 PC3L-8500R-7, ECC)  
 Disk Subsystem: 2 x 300 GB 10000 RPM SAS, RAID0  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: Not Applicable  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = Not Run**

PowerEdge R810 (Intel Xeon E7-2870, 2.40 GHz)

**SPECint\_rate\_base2006 = 488**

CPU2006 license: 55

Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	1031	379	<b>1001</b>	<b>390</b>	997	392							
401.bzip2	40	1362	283	<b>1343</b>	<b>287</b>	1341	288							
403.gcc	40	771	418	760	424	<b>768</b>	<b>419</b>							
429.mcf	40	<b>689</b>	<b>530</b>	687	531	692	527							
445.gobmk	40	921	455	<b>922</b>	<b>455</b>	923	454							
456.hmmer	40	628	594	606	616	<b>612</b>	<b>610</b>							
458.sjeng	40	1121	432	<b>1119</b>	<b>432</b>	1117	433							
462.libquantum	40	358	2320	356	2330	<b>357</b>	<b>2320</b>							
464.h264ref	40	1430	619	1447	612	<b>1437</b>	<b>616</b>							
471.omnetpp	40	829	302	829	301	<b>829</b>	<b>302</b>							
473.astar	40	<b>940</b>	<b>299</b>	938	299	941	298							
483.xalancbmk	40	<b>578</b>	<b>477</b>	573	482	579	476							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 18000 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)

## General Notes

Binaries were compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = Not Run

PowerEdge R810 (Intel Xeon E7-2870, 2.40 GHz)

SPECint\_rate\_base2006 = 488

CPU2006 license: 55

Test date: Mar-2011

Test sponsor: Dell Inc.

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smarterheap -lsmarterheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECint\_rate2006 = Not Run**

PowerEdge R810 (Intel Xeon E7-2870, 2.40 GHz)

**SPECint\_rate\_base2006 = 488**

**CPU2006 license:** 55

**Test date:** Mar-2011

**Test sponsor:** Dell Inc.

**Hardware Availability:** Apr-2011

**Tested by:** Dell Inc.

**Software Availability:** Jan-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 17:33:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 June 2011.