SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Wipro Limited

Wipro NetPowerZ2243/NetPowerZ2243R

SPECint®_rate2006 = 379

SPECint_rate_base2006 = 358

CPU2006 license: 937
Test sponsor: Wipro Limited
Tested by: Wipro Limited

Test date: Jun-2011
Hardware Availability: Apr-2011
Software Availability: May-2011

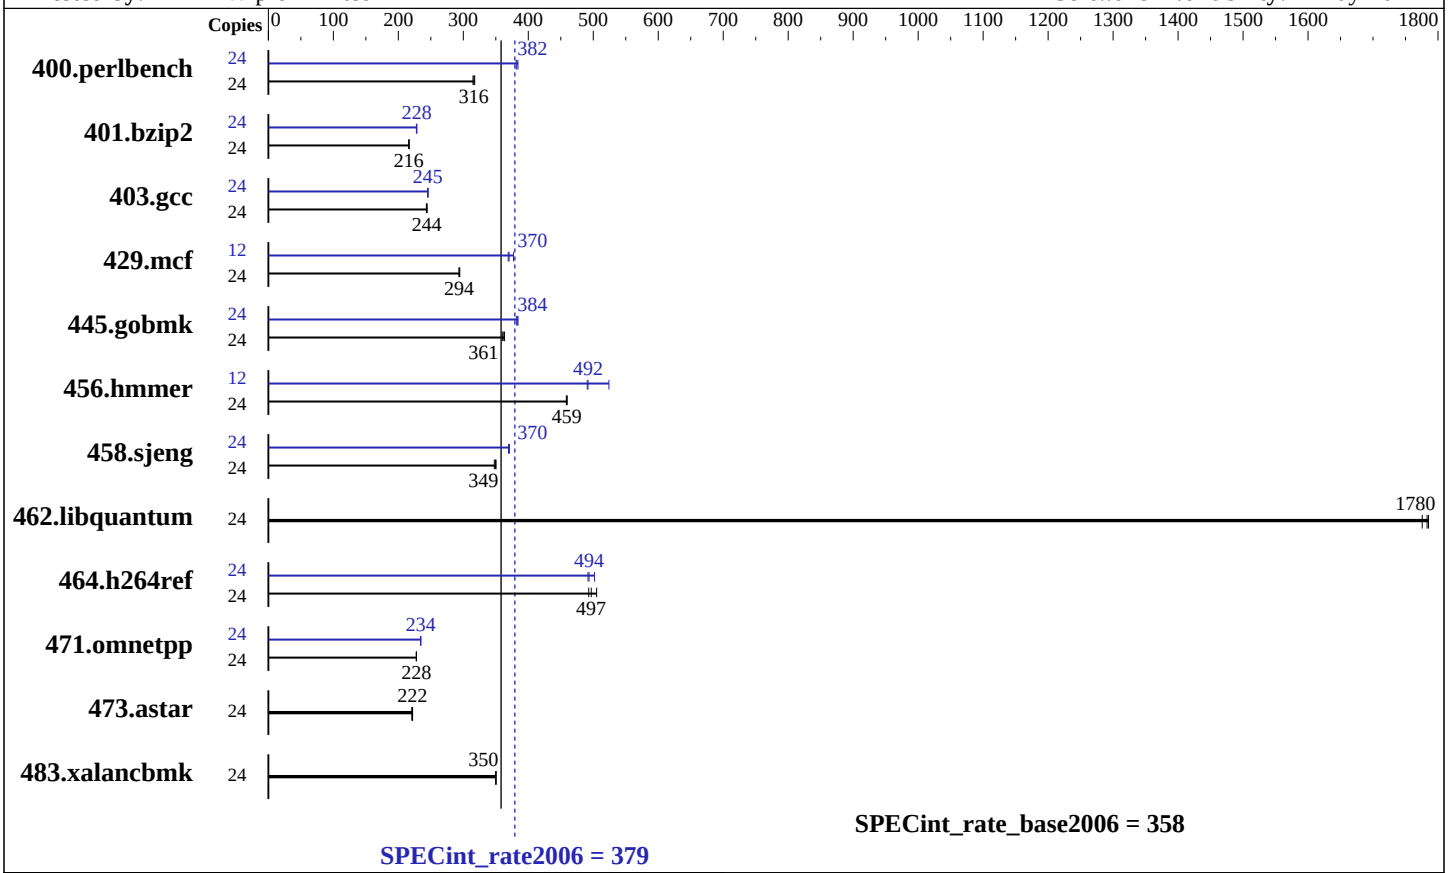

Hardware

CPU Name:	Intel Xeon X5670
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 160 GB SATA, 7200RPM
Other Hardware:	None

Software

Operating System:	SuSe Linux SLES10 (x86_64) SP1, Kernel 2.6.27.19-5-default
Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Wipro Limited

Wipro NetPowerZ2243/NetPowerZ2243R

SPECint_rate2006 = 379

SPECint_rate_base2006 = 358

CPU2006 license: 937
Test sponsor: Wipro Limited
Tested by: Wipro Limited

Test date: Jun-2011
Hardware Availability: Apr-2011
Software Availability: May-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	745	315	**741**	**316**	738	318	24	610	384	615	381	**613**	**382**
401.bzip2	24	**1071**	**216**	1070	217	1071	216	24	**1015**	**228**	1017	228	1014	228
403.gcc	24	791	244	795	243	**792**	**244**	24	788	245	786	246	**788**	**245**
429.mcf	24	746	293	**745**	**294**	743	295	12	297	369	290	377	**295**	**370**
445.gobmk	24	**697**	**361**	693	363	700	360	24	**656**	**384**	656	384	660	382
456.hmmer	24	487	460	488	458	**487**	**459**	12	214	524	228	491	**228**	**492**
458.sjeng	24	835	348	**831**	**349**	829	350	24	783	371	**786**	**370**	786	370
462.libquantum	24	**279**	**1780**	279	1790	280	1780	24	**279**	**1780**	279	1790	280	1780
464.h264ref	24	1077	493	**1069**	**497**	1051	505	24	1080	492	**1076**	**494**	1058	502
471.omnetpp	24	659	228	658	228	**659**	**228**	24	640	235	**640**	**234**	640	234
473.astar	24	759	222	**760**	**222**	763	221	24	759	222	**760**	**222**	763	221
483.xalancbmk	24	**473**	**350**	473	350	473	350	24	**473**	**350**	473	350	473	350

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Large pages were disabled for this run
```

General Notes

```
Binaries compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch`
`-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs`
`-L/smartheap -lsmartheap`
`-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

Continued on next page

Peak Optimization Flags (Continued)

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html`
`http://www.spec.org/cpu2006/flags/Wipro-Platform.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml`
`http://www.spec.org/cpu2006/flags/Wipro-Platform.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 23:38:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 August 2011.