SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Fire X4470 M2 (Intel Xeon E7-4870 2.40 GHz)

SPECint®_rate2006 = 1080

SPECint_rate_base2006 = 1010

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Jun-2011
Hardware Availability: Jun-2011
Software Availability: Aug-2011

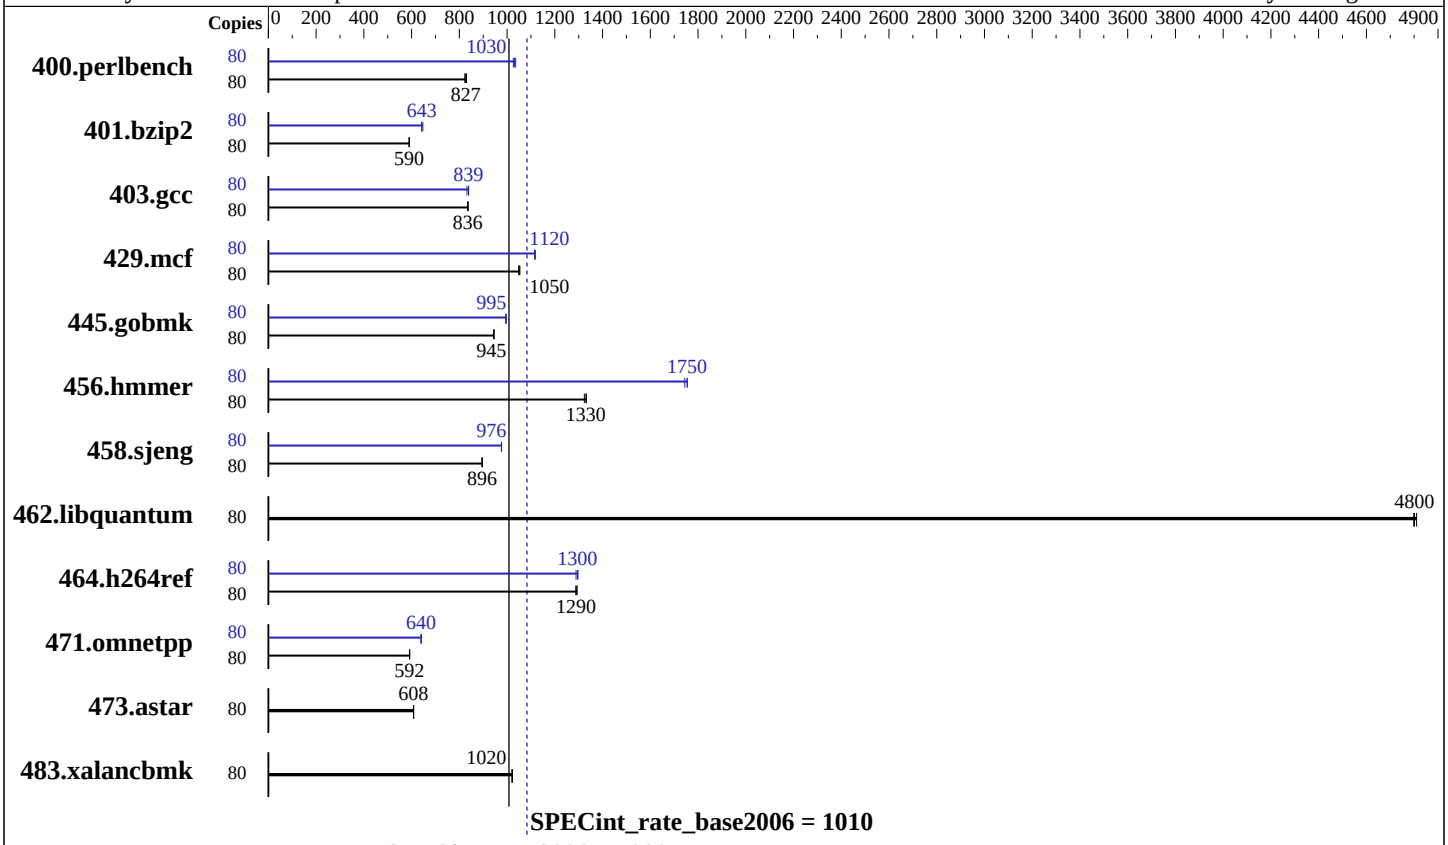

Hardware

CPU Name:	Intel Xeon E7-4870
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (64 x 8 GB 2Rx8 PC3L-10600R-9, ECC, running at 1066 MHz)
Disk Subsystem:	1 x 500 GB, SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Oracle Linux 6 kernel 2.6.32-100.28.5.el6.x86_64
Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Fire X4470 M2 (Intel Xeon E7-4870 2.40 GHz)

SPECint_rate2006 = 1080

SPECint_rate_base2006 = 1010

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Jun-2011
Hardware Availability: Jun-2011
Software Availability: Aug-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	**946**	**827**	942	830	950	823	80	**758**	**1030**	762	1030	755	1040
401.bzip2	80	1307	591	**1308**	**590**	1310	589	80	1193	647	**1202**	**643**	1202	642
403.gcc	80	769	837	772	834	**771**	**836**	80	**768**	**839**	774	832	768	839
429.mcf	80	696	1050	**694**	**1050**	692	1050	80	**654**	**1120**	654	1120	652	1120
445.gobmk	80	888	946	889	944	**888**	**945**	80	842	997	844	994	**843**	**995**
456.hmmer	80	560	1330	**561**	**1330**	564	1320	80	425	1760	**426**	**1750**	428	1740
458.sjeng	80	1080	896	**1080**	**896**	1082	895	80	**991**	**976**	991	977	992	976
462.libquantum	80	**345**	**4800**	345	4810	345	4800	80	**345**	**4800**	345	4810	345	4800
464.h264ref	80	**1373**	**1290**	1368	1290	1374	1290	80	1374	1290	**1367**	**1300**	1365	1300
471.omnetpp	80	844	592	**845**	**592**	846	591	80	**781**	**640**	781	641	782	639
473.astar	80	923	608	923	608	**923**	**608**	80	923	608	923	608	**923**	**608**
483.xalancbmk	80	**540**	**1020**	540	1020	541	1020	80	**540**	**1020**	540	1020	541	1020

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 Hugepages was enabled with the following:
   'nodev   /mnt/hugepages   hugetlbfs  defaults   0 0' added to /etc/fstab
    echo 36000 > /proc/sys/vm/nr_hugepages
    export HUGETLB_MORECORE=yes
    export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

```
Default BIOS Settings were used.
```

General Notes

```
Binaries were compiled on RHEL5.5
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs

Continued on next page

Peak Optimization Flags (Continued)

471.omnetpp (continued):
`-L/smartheap -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html`
`http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20110808.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml`
`http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.20110808.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:11:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 August 2011.