



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon E5606, 2.13GHz)

**SPECfp<sup>®</sup>\_rate2006 = 134**

**SPECfp\_rate\_base2006 = 127**

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jul-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

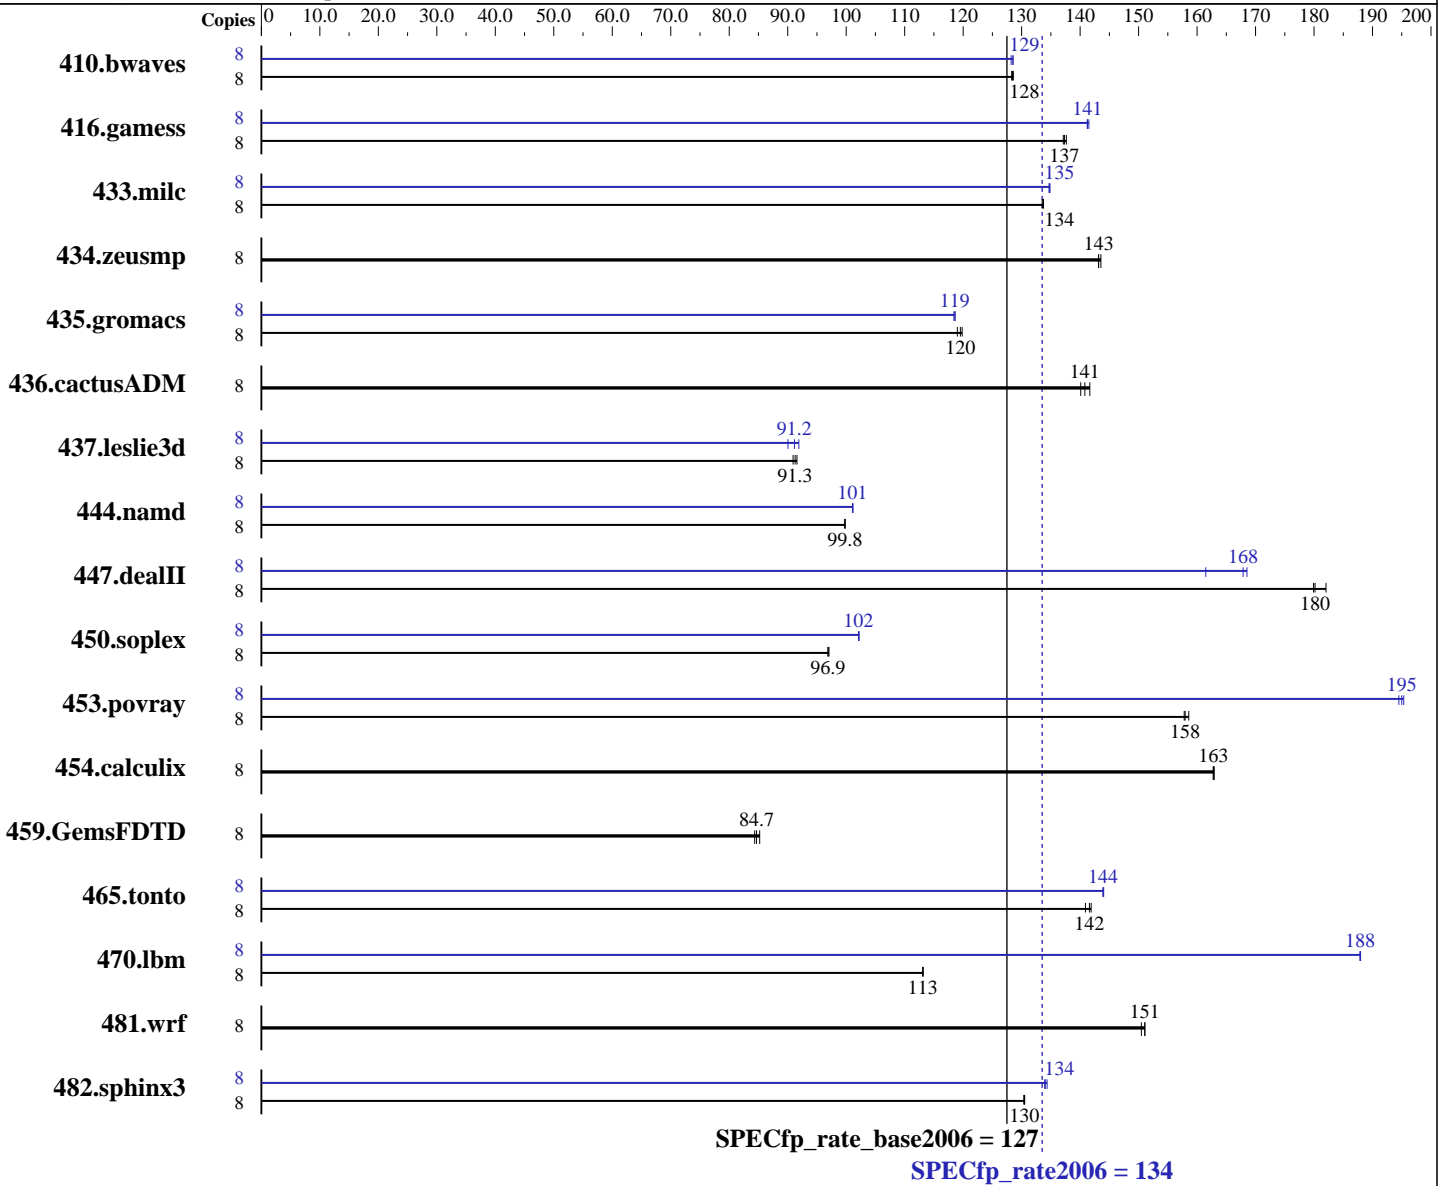

### Hardware

CPU Name: Intel Xeon E5606  
 CPU Characteristics: 2133  
 CPU MHz: Integrated  
 FPU: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) enabled: 1, 2 chips  
 CPU(s) orderable: 32 KB I + 32 KB D on chip per core  
 Primary Cache: 256 KB I+D on chip per core  
 Secondary Cache:

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon E5606, 2.13GHz)

SPECfp\_rate2006 = 134

SPECfp\_rate\_base2006 = 127

CPU2006 license: 97  
Test sponsor: Acer Incorporated  
Tested by: Acer Incorporated

Test date: Jul-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 1000 GB SATA 7200RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	846	129	847	128	<b>847</b>	<b>128</b>	8	<b>846</b>	<b>129</b>	848	128	846	129
416.gamess	8	<b>1141</b>	<b>137</b>	1142	137	1138	138	8	1109	141	<b>1109</b>	<b>141</b>	1107	141
433.milc	8	549	134	<b>550</b>	<b>134</b>	550	134	8	<b>545</b>	<b>135</b>	545	135	545	135
434.zeusmp	8	509	143	<b>508</b>	<b>143</b>	507	144	8	509	143	<b>508</b>	<b>143</b>	507	144
435.gromacs	8	477	120	480	119	<b>478</b>	<b>120</b>	8	482	119	482	118	<b>482</b>	<b>119</b>
436.cactusADM	8	682	140	<b>679</b>	<b>141</b>	675	142	8	682	140	<b>679</b>	<b>141</b>	675	142
437.leslie3d	8	827	90.9	<b>824</b>	<b>91.3</b>	821	91.6	8	835	90.0	<b>825</b>	<b>91.2</b>	818	91.9
444.namd	8	643	99.8	<b>643</b>	<b>99.8</b>	643	99.8	8	634	101	<b>635</b>	<b>101</b>	635	101
447.dealII	8	509	180	<b>508</b>	<b>180</b>	503	182	8	543	169	567	161	<b>545</b>	<b>168</b>
450.soplex	8	<b>689</b>	<b>96.9</b>	687	97.1	689	96.9	8	653	102	<b>653</b>	<b>102</b>	653	102
453.povray	8	270	158	<b>269</b>	<b>158</b>	268	159	8	<b>218</b>	<b>195</b>	218	195	219	195
454.calculix	8	405	163	<b>405</b>	<b>163</b>	406	163	8	405	163	<b>405</b>	<b>163</b>	406	163
459.GemsFDTD	8	<b>1002</b>	<b>84.7</b>	996	85.2	1006	84.4	8	<b>1002</b>	<b>84.7</b>	996	85.2	1006	84.4
465.tonto	8	<b>556</b>	<b>142</b>	555	142	559	141	8	547	144	<b>547</b>	<b>144</b>	547	144
470.lbm	8	<b>972</b>	<b>113</b>	972	113	971	113	8	<b>585</b>	<b>188</b>	585	188	585	188
481.wrf	8	592	151	<b>592</b>	<b>151</b>	594	150	8	592	151	<b>592</b>	<b>151</b>	594	150
482.sphinx3	8	1196	130	<b>1195</b>	<b>130</b>	1195	131	8	<b>1163</b>	<b>134</b>	1164	134	1161	134

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
Large pages were disabled for this run

## Platform Notes

BIOS Settings:  
Fan speed = full speed (Default = Balanced)  
Data Reuse = Disabled (Default = Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

Gateway GW2000ht-GW170ht F1 (Intel Xeon E5606, 2.13GHz)

**SPECfp\_rate2006 = 134**

**SPECfp\_rate\_base2006 = 127**

**CPU2006 license:** 97  
**Test sponsor:** Acer Incorporated  
**Tested by:** Acer Incorporated

**Test date:** Jul-2011  
**Hardware Availability:** Feb-2011  
**Software Availability:** Jan-2011

## General Notes

Binaries compiled on RHEL5.5

The Acer AW2000h-AW170h F1, Gateway GW2000h-GW170h F1, Acer AW2000ht-AW170ht F1 and Gateway GW2000ht-GW170ht F1 are electronically equivalent. This result was measured on Gateway GW2000ht-GW170ht F1.

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

Gateway GW2000ht-GW170ht F1 (Intel Xeon E5606, 2.13GHz)

**SPECfp\_rate2006 = 134**

**SPECfp\_rate\_base2006 = 127**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jul-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3: icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex: icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
 416.gamess: `-DSPEC_CPU_LP64`  
 433.milc: `-DSPEC_CPU_LP64`  
 434.zeusmp: `-DSPEC_CPU_LP64`  
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
 437.leslie3d: `-DSPEC_CPU_LP64`  
 444.namd: `-DSPEC_CPU_LP64`  
 447.deallI: `-DSPEC_CPU_LP64`  
 453.povray: `-DSPEC_CPU_LP64`  
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
 459.GemsFDTD: `-DSPEC_CPU_LP64`  
 465.tonto: `-DSPEC_CPU_LP64`  
 470.lbm: `-DSPEC_CPU_LP64`  
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon E5606, 2.13GHz)

**SPECfp\_rate2006 = 134**

**SPECfp\_rate\_base2006 = 127**

**CPU2006 license:** 97  
**Test sponsor:** Acer Incorporated  
**Tested by:** Acer Incorporated

**Test date:** Jul-2011  
**Hardware Availability:** Feb-2011  
**Software Availability:** Jan-2011

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon E5606, 2.13GHz)

SPECfp\_rate2006 = 134

SPECfp\_rate\_base2006 = 127

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jul-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 00:04:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 August 2011.