



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp®\_rate2006 = 135

Servidor Itautec MP224 (Intel Xeon X5670)

SPECfp\_rate\_base2006 = 132

CPU2006 license: 9001


Test sponsor: Itautec

Tested by: Itautec

Test date: Jul-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

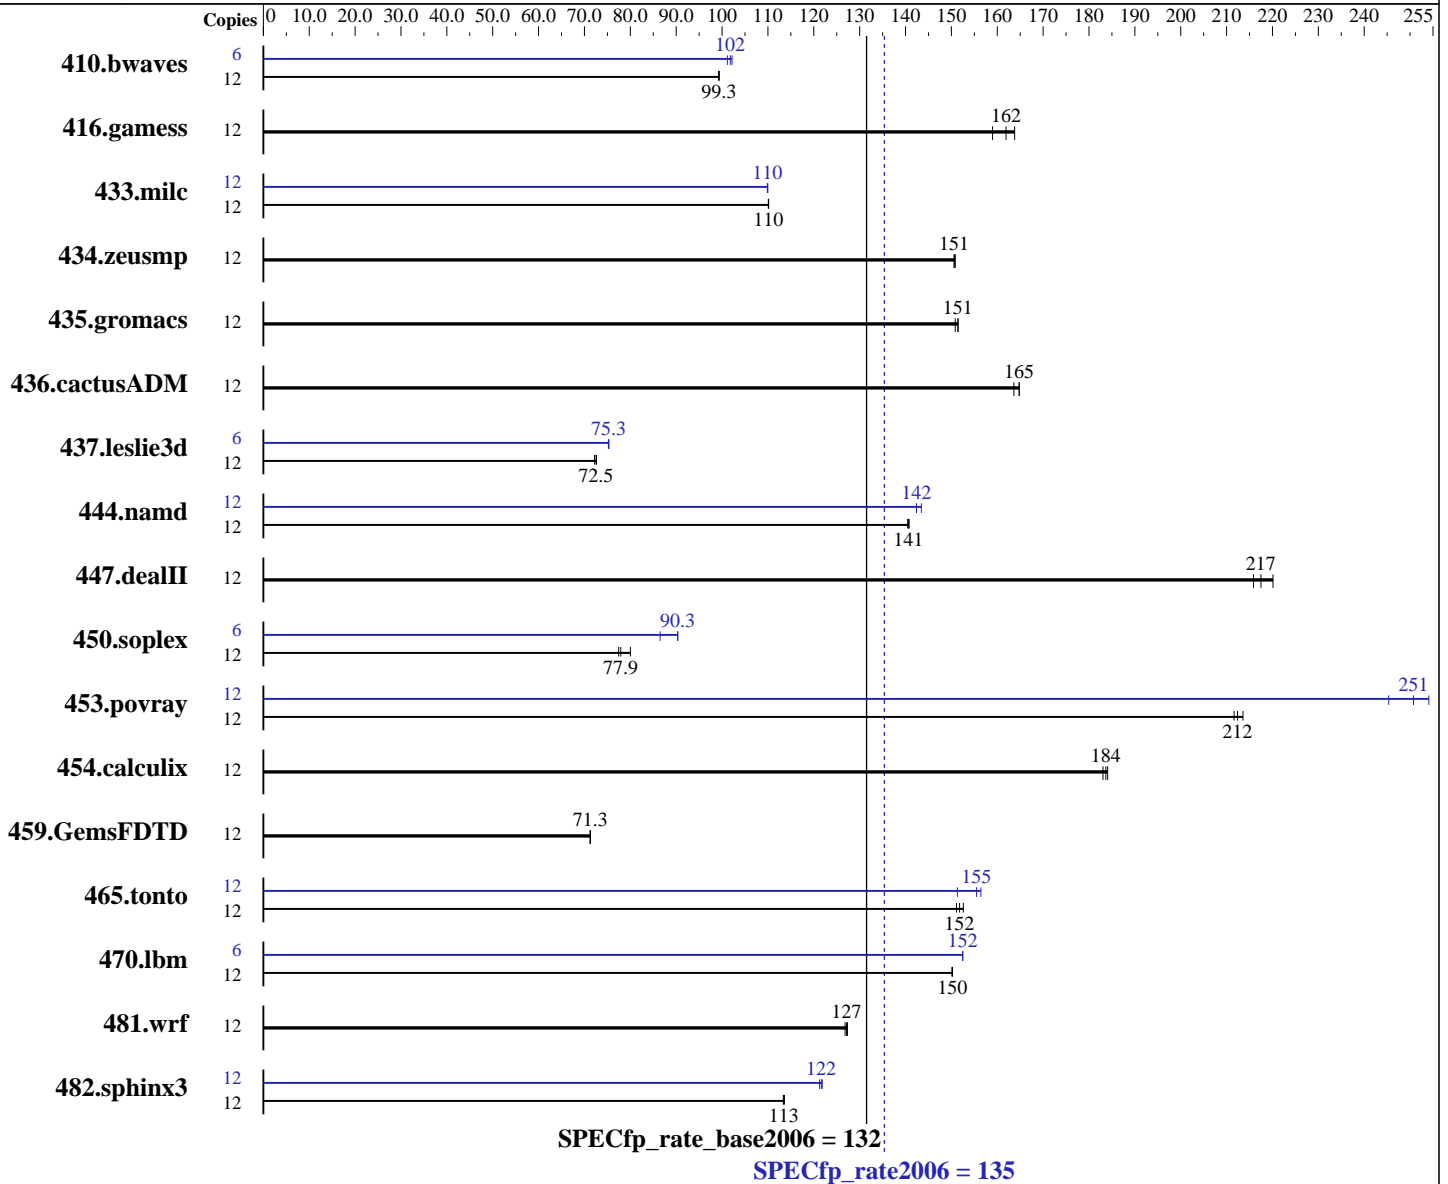

### Hardware

CPU Name: Intel Xeon X5670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.2 Build 20110112  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 135

Servidor Itaotec MP224 (Intel Xeon X5670)

SPECfp\_rate\_base2006 = 132

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Jul-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 500 GB SATA-2, 7200 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1641	99.4	<b><u>1642</u></b>	<b><u>99.3</u></b>	1643	99.2	6	798	102	<b><u>801</u></b>	<b><u>102</u></b>	806	101
416.gamess	12	1434	164	<b><u>1451</u></b>	<b><u>162</u></b>	1478	159	12	1434	164	<b><u>1451</u></b>	<b><u>162</u></b>	1478	159
433.milc	12	1000	110	<b><u>1000</u></b>	<b><u>110</u></b>	1000	110	12	1002	110	<b><u>1002</u></b>	<b><u>110</u></b>	1003	110
434.zeusmp	12	725	151	724	151	<b><u>725</u></b>	<b><u>151</u></b>	12	725	151	724	151	<b><u>725</u></b>	<b><u>151</u></b>
435.gromacs	12	568	151	<b><u>566</u></b>	<b><u>151</u></b>	566	151	12	568	151	<b><u>566</u></b>	<b><u>151</u></b>	566	151
436.cactusADM	12	<b><u>870</u></b>	<b><u>165</u></b>	876	164	870	165	12	<b><u>870</u></b>	<b><u>165</u></b>	876	164	870	165
437.leslie3d	12	1553	72.6	1563	72.2	<b><u>1555</u></b>	<b><u>72.5</u></b>	6	750	75.2	749	75.3	<b><u>749</u></b>	<b><u>75.3</u></b>
444.namd	12	<b><u>684</u></b>	<b><u>141</u></b>	684	141	685	140	12	<b><u>676</u></b>	<b><u>142</u></b>	671	143	676	142
447.dealII	12	624	220	<b><u>631</u></b>	<b><u>217</u></b>	636	216	12	624	220	<b><u>631</u></b>	<b><u>217</u></b>	636	216
450.soplex	12	<b><u>1284</u></b>	<b><u>77.9</u></b>	1292	77.5	1251	80.0	6	578	86.5	<b><u>554</u></b>	<b><u>90.3</u></b>	554	90.3
453.povray	12	302	212	<b><u>301</u></b>	<b><u>212</u></b>	299	214	12	260	245	<b><u>255</u></b>	<b><u>251</u></b>	251	254
454.calculix	12	538	184	<b><u>539</u></b>	<b><u>184</u></b>	541	183	12	538	184	<b><u>539</u></b>	<b><u>184</u></b>	541	183
459.GemsFDTD	12	1786	71.3	1787	71.2	<b><u>1786</u></b>	<b><u>71.3</u></b>	12	1786	71.3	1787	71.2	<b><u>1786</u></b>	<b><u>71.3</u></b>
465.tonto	12	<b><u>778</u></b>	<b><u>152</u></b>	781	151	774	153	12	755	156	<b><u>759</u></b>	<b><u>155</u></b>	780	151
470.lbm	12	<b><u>1098</u></b>	<b><u>150</u></b>	1097	150	1098	150	6	541	152	541	152	<b><u>541</u></b>	<b><u>152</u></b>
481.wrf	12	1057	127	1053	127	<b><u>1054</u></b>	<b><u>127</u></b>	12	1057	127	1053	127	<b><u>1054</u></b>	<b><u>127</u></b>
482.sphinx3	12	<b><u>2062</u></b>	<b><u>113</u></b>	2059	114	2063	113	12	<b><u>1923</u></b>	<b><u>122</u></b>	1929	121	1919	122

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

Data Reuse disabled in BIOS.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp\_rate2006 = 135

Servidor Itautec MP224 (Intel Xeon X5670)

SPECfp\_rate\_base2006 = 132

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Jul-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -noFOR\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -noFOR\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -noFOR\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 135

Servidor Itaotec MP224 (Intel Xeon X5670)

SPECfp\_rate\_base2006 = 132

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Jul-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp\_rate2006 = 135

Servidor Itautec MP224 (Intel Xeon X5670)

SPECfp\_rate\_base2006 = 132

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Jul-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.deallI: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 135

Servidor Itaotec MP224 (Intel Xeon X5670)

SPECfp\_rate\_base2006 = 132

CPU2006 license: 9001

Test date: Jul-2011

Test sponsor: Itaotec

Hardware Availability: Feb-2011

Tested by: Itaotec

Software Availability: Jan-2011

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-Linux64-Platform.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-Linux64-Platform.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 23:14:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 August 2011.