SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH67BLB3 Motherboard (Intel Pentium G620T)

SPECint®2006 = 26.2

SPECint_base2006 = 24.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jul-2011
Hardware Availability: May-2011
Software Availability: Apr-2011

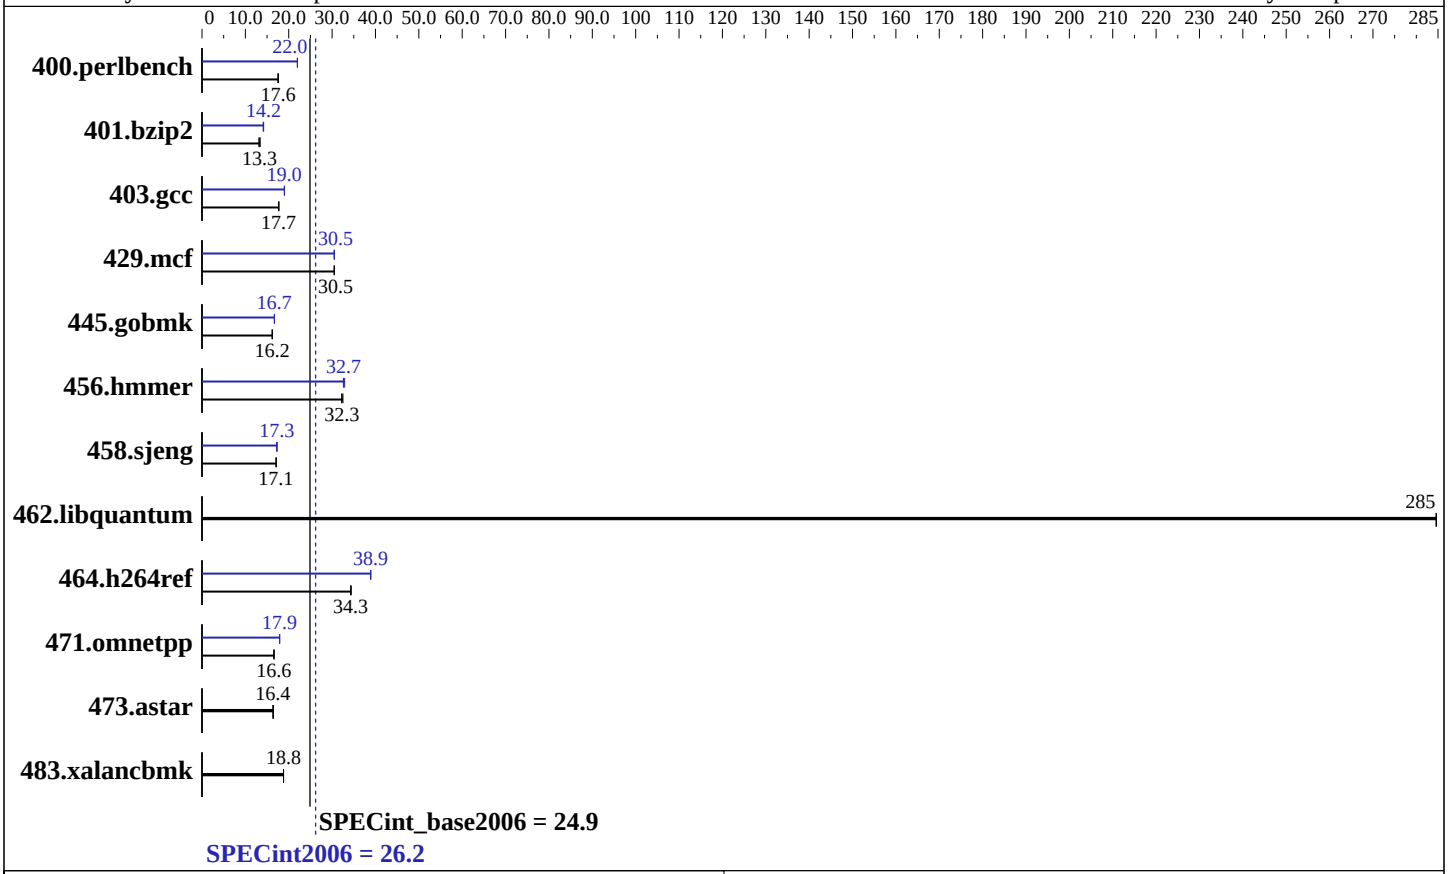

Hardware

CPU Name:	Intel Pentium G620T
CPU Characteristics:	
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	3 MB I+D on chip per chip
Other Cache:	None
Memory:	4 GB (2 x 2 GB 2Rx8 PC3-10600U-9, running at 1066 MHz)
Disk Subsystem:	Seagate 1 TB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows 7 Ultimate (64-bit)
Compiler:	Intel C++ Compiler XE for Intel64 Version 12.0.3.176 Build 20110309 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 9.01 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH67BLB3 Motherboard (Intel Pentium G620T)

SPECint2006 = 26.2

SPECint_base2006 = 24.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jul-2011
Hardware Availability: May-2011
Software Availability: Apr-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	557	17.5	**557**	**17.6**	556	17.6	444	22.0	**444**	**22.0**	444	22.0
401.bzip2	734	13.1	719	13.4	**727**	**13.3**	684	14.1	678	14.2	**679**	**14.2**
403.gcc	454	17.7	454	17.7	**454**	**17.7**	423	19.0	424	19.0	**424**	**19.0**
429.mcf	299	30.5	**299**	**30.5**	299	30.5	299	30.5	**299**	**30.5**	300	30.5
445.gobmk	**646**	**16.2**	646	16.2	646	16.2	**629**	**16.7**	629	16.7	629	16.7
456.hmmer	287	32.5	**289**	**32.3**	290	32.2	**285**	**32.7**	286	32.6	284	32.9
458.sjeng	**709**	**17.1**	709	17.1	709	17.1	**701**	**17.3**	702	17.2	701	17.3
462.libquantum	72.8	285	**72.8**	**285**	72.8	285	72.8	285	**72.8**	**285**	72.8	285
464.h264ref	644	34.4	**645**	**34.3**	645	34.3	**568**	**38.9**	568	38.9	569	38.9
471.omnetpp	377	16.6	377	16.6	**377**	**16.6**	350	17.9	349	17.9	**349**	**17.9**
473.astar	429	16.4	429	16.4	**429**	**16.4**	429	16.4	429	16.4	**429**	**16.4**
483.xalancbmk	367	18.8	**367**	**18.8**	367	18.8	367	18.8	**367**	**18.8**	367	18.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64
-DSPEC_CPU_NO_NEED_VA_COPY
401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
429.mcf: -DSPEC_CPU_P64
445.gobmk: -DSPEC_CPU_P64
456.hmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64

Continued on next page

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES
471.omnetpp: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -DSPEC_CPU_P64 -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F512000000

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F512000000 shlW64M.lib

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench (continued):
-link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias -Qauto-ilp32 /F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F512000000

456.hmmer: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F512000000

458.sjeng: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto-ilp32 /F512000000

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.html
http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.xml
http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 22:10:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 August 2011.