



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon E5607, 2.26 GHz)

**SPECfp®\_rate2006 = 137**

**SPECfp\_rate\_base2006 = 131**

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jul-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

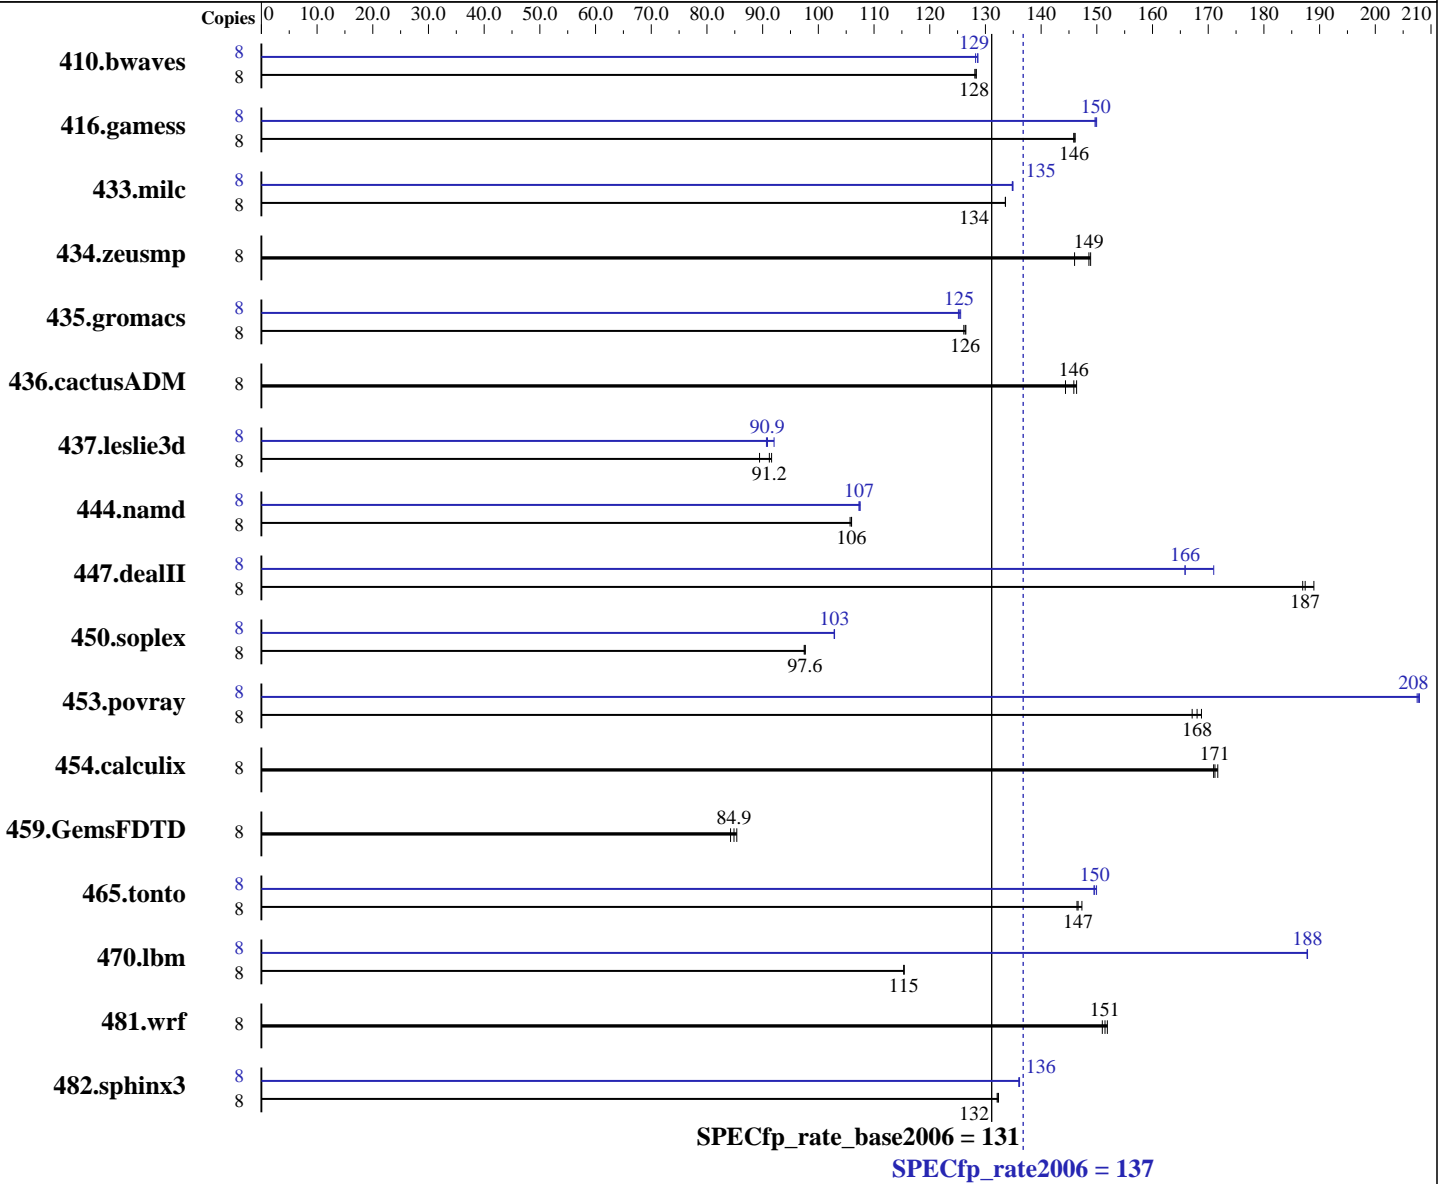

### Hardware

CPU Name: Intel Xeon E5607  
 CPU Characteristics:  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon E5607, 2.26 GHz)

SPECfp\_rate2006 = 137

SPECfp\_rate\_base2006 = 131

CPU2006 license: 97  
Test sponsor: Acer Incorporated  
Tested by: Acer Incorporated

Test date: Jul-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 1000 GB SATA 7200 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<b>847</b>	<b>128</b>	849	128	847	128	8	848	128	<b>845</b>	<b>129</b>	845	129
416.gamess	8	1072	146	<b>1073</b>	<b>146</b>	1074	146	8	1046	150	1045	150	<b>1045</b>	<b>150</b>
433.milc	8	<b>550</b>	<b>134</b>	550	134	550	134	8	544	135	545	135	<b>545</b>	<b>135</b>
434.zeusmp	8	489	149	499	146	<b>490</b>	<b>149</b>	8	489	149	499	146	<b>490</b>	<b>149</b>
435.gromacs	8	452	126	453	126	<b>452</b>	<b>126</b>	8	456	125	455	126	<b>456</b>	<b>125</b>
436.cactusADM	8	662	144	653	146	<b>655</b>	<b>146</b>	8	662	144	653	146	<b>655</b>	<b>146</b>
437.leslie3d	8	841	89.4	<b>825</b>	<b>91.2</b>	821	91.6	8	817	92.1	<b>828</b>	<b>90.9</b>	829	90.7
444.namd	8	607	106	<b>606</b>	<b>106</b>	605	106	8	597	108	<b>598</b>	<b>107</b>	598	107
447.dealII	8	484	189	489	187	<b>488</b>	<b>187</b>	8	<b>552</b>	<b>166</b>	552	166	535	171
450.soplex	8	685	97.5	<b>684</b>	<b>97.6</b>	683	97.7	8	<b>648</b>	<b>103</b>	649	103	648	103
453.povray	8	255	167	<b>253</b>	<b>168</b>	252	169	8	205	208	<b>205</b>	<b>208</b>	205	208
454.calculix	8	384	172	386	171	<b>385</b>	<b>171</b>	8	384	172	386	171	<b>385</b>	<b>171</b>
459.GemsFDTD	8	<b>1000</b>	<b>84.9</b>	1008	84.2	994	85.4	8	<b>1000</b>	<b>84.9</b>	1008	84.2	994	85.4
465.tonto	8	538	146	534	147	<b>537</b>	<b>147</b>	8	525	150	527	149	<b>526</b>	<b>150</b>
470.lbm	8	953	115	<b>953</b>	<b>115</b>	953	115	8	585	188	<b>585</b>	<b>188</b>	585	188
481.wrf	8	<b>590</b>	<b>151</b>	588	152	592	151	8	<b>590</b>	<b>151</b>	588	152	592	151
482.sphinx3	8	1180	132	<b>1179</b>	<b>132</b>	1178	132	8	1146	136	1145	136	<b>1146</b>	<b>136</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
Large pages were disabled for this run

## Platform Notes

BIOS Settings:  
Fan speed = full speed (Default = Balanced)  
Data Reuse = Disabled (Default = Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon E5607, 2.26 GHz)

SPECfp\_rate2006 = 137

SPECfp\_rate\_base2006 = 131

**CPU2006 license:** 97  
**Test sponsor:** Acer Incorporated  
**Tested by:** Acer Incorporated

**Test date:** Jul-2011  
**Hardware Availability:** Feb-2011  
**Software Availability:** Jan-2011

## General Notes

Binaries compiled on RHEL5.5  
None

The Acer AW2000h-AW170h F1, Gateway GW2000h-GW170h F1, Acer AW2000ht-AW170ht F1 and Gateway GW2000ht-GW170ht F1 are electronically equivalent. This result was measured on Gateway GW2000ht-GW170ht F1.

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon E5607, 2.26 GHz)

SPECfp\_rate2006 = 137

SPECfp\_rate\_base2006 = 131

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jul-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon E5607, 2.26 GHz)

**SPECfp\_rate2006 = 137**

**SPECfp\_rate\_base2006 = 131**

**CPU2006 license:** 97  
**Test sponsor:** Acer Incorporated  
**Tested by:** Acer Incorporated

**Test date:** Jul-2011  
**Hardware Availability:** Feb-2011  
**Software Availability:** Jan-2011

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Gateway GW2000ht-GW170ht F1 (Intel Xeon E5607, 2.26 GHz)

**SPECfp\_rate2006 = 137**

**SPECfp\_rate\_base2006 = 131**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jul-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 21:40:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 August 2011.