



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon X5650, 2.66GHz)

SPECfp<sup>®</sup>\_rate2006 = 252

SPECfp\_rate\_base2006 = 246

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Aug-2011

Hardware Availability: Aug-2010

Software Availability: Jan-2011

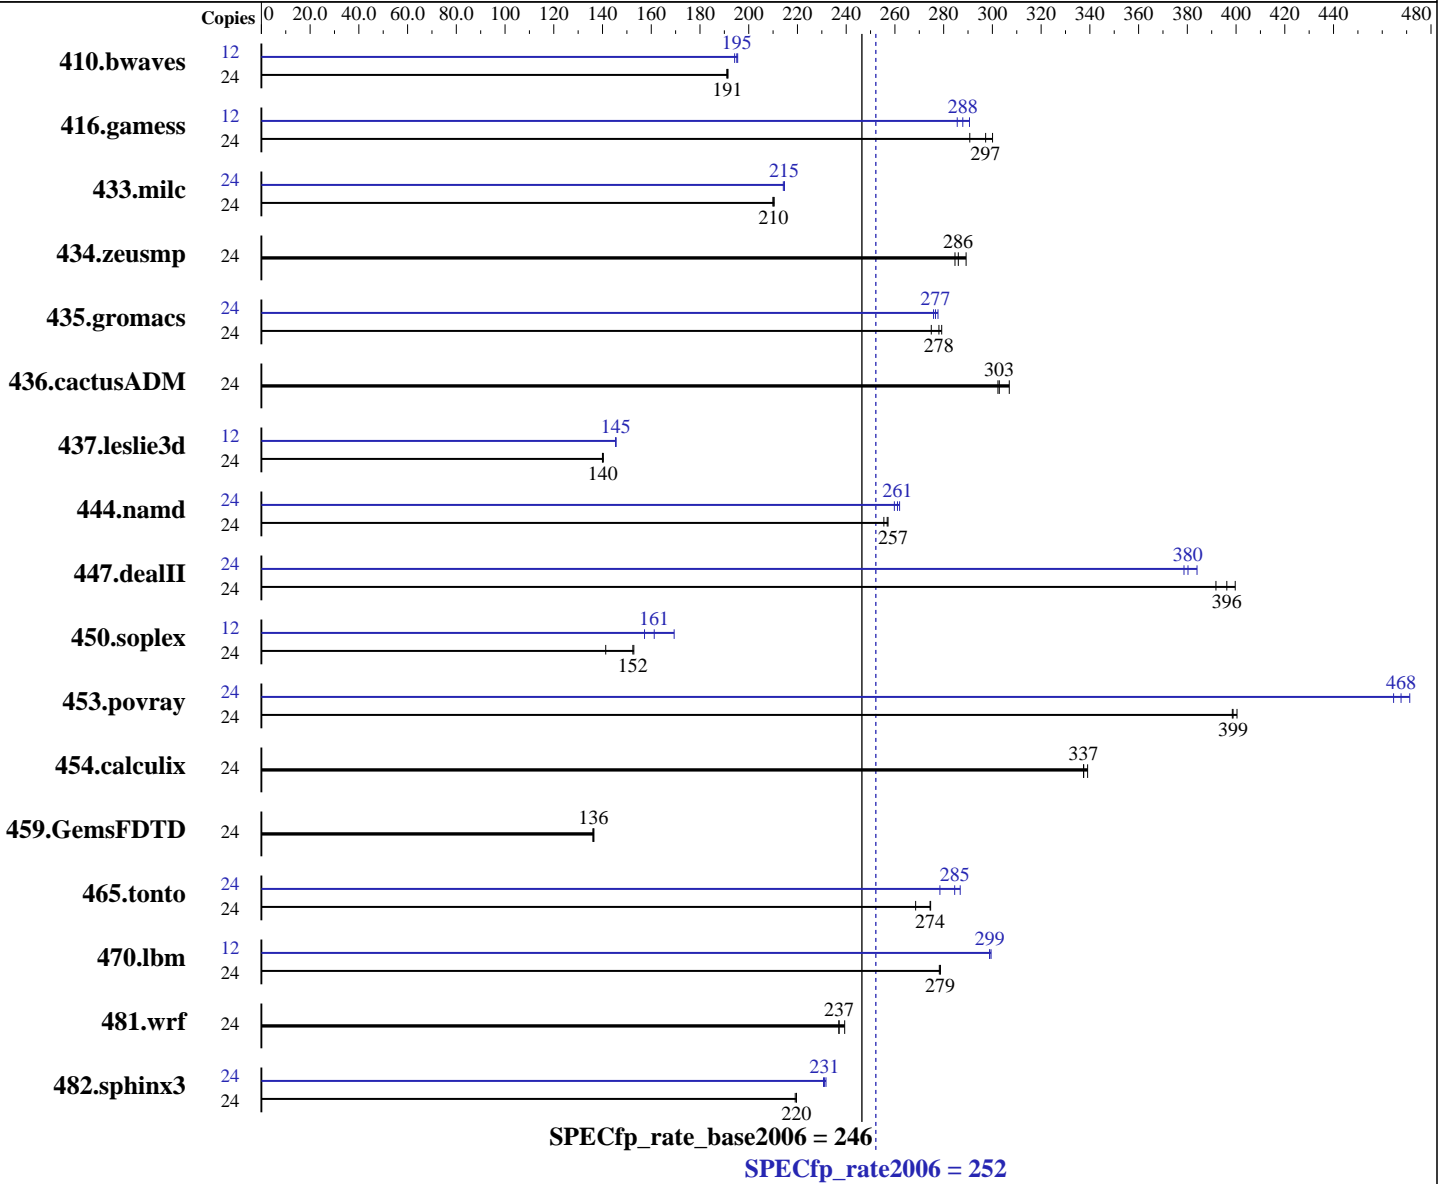

### Hardware

CPU Name: Intel Xeon X5650  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon X5650, 2.66GHz)

SPECfp\_rate2006 = 252

SPECfp\_rate\_base2006 = 246

CPU2006 license: 97  
Test sponsor: Acer Incorporated  
Tested by: Acer Incorporated

Test date: Aug-2011  
Hardware Availability: Aug-2010  
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 1000 GB SATA 7200RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1703	192	<u>1705</u>	<u>191</u>	1708	191	12	834	195	<u>836</u>	<u>195</u>	840	194
416.gamess	24	1566	300	1616	291	<u>1581</u>	<u>297</u>	12	823	286	<u>816</u>	<u>288</u>	809	291
433.milc	24	1047	210	<u>1049</u>	<u>210</u>	1049	210	24	1029	214	1026	215	<u>1027</u>	<u>215</u>
434.zeusmp	24	755	289	<u>764</u>	<u>286</u>	767	285	24	755	289	<u>764</u>	<u>286</u>	767	285
435.gromacs	24	614	279	<u>616</u>	<u>278</u>	623	275	24	<u>619</u>	<u>277</u>	617	278	621	276
436.cactusADM	24	934	307	949	302	<u>947</u>	<u>303</u>	24	934	307	949	302	<u>947</u>	<u>303</u>
437.leslie3d	24	1608	140	1612	140	<u>1610</u>	<u>140</u>	12	<u>776</u>	<u>145</u>	775	146	776	145
444.namd	24	753	255	748	257	<u>749</u>	<u>257</u>	24	735	262	<u>737</u>	<u>261</u>	741	260
447.dealII	24	<u>693</u>	<u>396</u>	687	400	701	392	24	715	384	725	379	<u>722</u>	<u>380</u>
450.soplex	24	1416	141	<u>1313</u>	<u>152</u>	1309	153	12	636	157	<u>621</u>	<u>161</u>	591	169
453.povray	24	<u>320</u>	<u>399</u>	319	400	320	398	24	<u>273</u>	<u>468</u>	271	471	275	465
454.calculix	24	584	339	587	337	<u>587</u>	<u>337</u>	24	584	339	587	337	<u>587</u>	<u>337</u>
459.GemsFDTD	24	1872	136	<u>1868</u>	<u>136</u>	1866	136	24	1872	136	<u>1868</u>	<u>136</u>	1866	136
465.tonto	24	880	269	<u>861</u>	<u>274</u>	860	275	24	848	278	<u>830</u>	<u>285</u>	823	287
470.lbm	24	<u>1184</u>	<u>279</u>	1185	278	1183	279	12	551	299	<u>552</u>	<u>299</u>	552	299
481.wrf	24	1120	239	1131	237	<u>1131</u>	<u>237</u>	24	1120	239	1131	237	<u>1131</u>	<u>237</u>
482.sphinx3	24	2135	219	2130	220	<u>2130</u>	<u>220</u>	24	2028	231	<u>2024</u>	<u>231</u>	2019	232

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
Large pages were disabled for this run

## Platform Notes

BIOS Settings:  
Fan speed = full speed (Default = Balanced)  
Data Reuse = Disabled (Default = Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon X5650, 2.66GHz)

SPECfp\_rate2006 = 252

SPECfp\_rate\_base2006 = 246

**CPU2006 license:** 97  
**Test sponsor:** Acer Incorporated  
**Tested by:** Acer Incorporated

**Test date:** Aug-2011  
**Hardware Availability:** Aug-2010  
**Software Availability:** Jan-2011

## General Notes

Binaries compiled on RHEL5.5

The Acer AW2000h-AW170h F1, Gateway GW2000h-GW170h F1, Acer AW2000ht-AW170ht F1 and Gateway GW2000ht-GW170ht F1 are electronically equivalent. This result was measured on Gateway GW2000ht-GW170ht F1.

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

Acer AW2000ht-AW170ht F1 (Intel Xeon X5650, 2.66GHz)

**SPECfp\_rate2006 = 252**

**SPECfp\_rate\_base2006 = 246**

**CPU2006 license:** 97  
**Test sponsor:** Acer Incorporated  
**Tested by:** Acer Incorporated

**Test date:** Aug-2011  
**Hardware Availability:** Aug-2010  
**Software Availability:** Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3:icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex:icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
444.namd: `-DSPEC_CPU_LP64`  
447.dealII: `-DSPEC_CPU_LP64`  
453.povray: `-DSPEC_CPU_LP64`  
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
459.GemsFDTD: `-DSPEC_CPU_LP64`  
465.tonto: `-DSPEC_CPU_LP64`  
470.lbm: `-DSPEC_CPU_LP64`  
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon X5650, 2.66GHz)

SPECfp\_rate2006 = 252

SPECfp\_rate\_base2006 = 246

**CPU2006 license:** 97  
**Test sponsor:** Acer Incorporated  
**Tested by:** Acer Incorporated

**Test date:** Aug-2011  
**Hardware Availability:** Aug-2010  
**Software Availability:** Jan-2011

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AW2000ht-AW170ht F1 (Intel Xeon X5650, 2.66GHz)

**SPECfp\_rate2006 = 252**

**SPECfp\_rate\_base2006 = 246**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Aug-2011

**Hardware Availability:** Aug-2010

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Acer-Intel-Linux-Settings-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 22:37:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 September 2011.