



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp[®]2006 = **63.6**

ASUS ESC4000(Z8PG-D18) Server System
(Intel Xeon X5690, 3.46 GHz)

SPECfp_base2006 = **60.0**

CPU2006 license: 9016


Test date: Aug-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

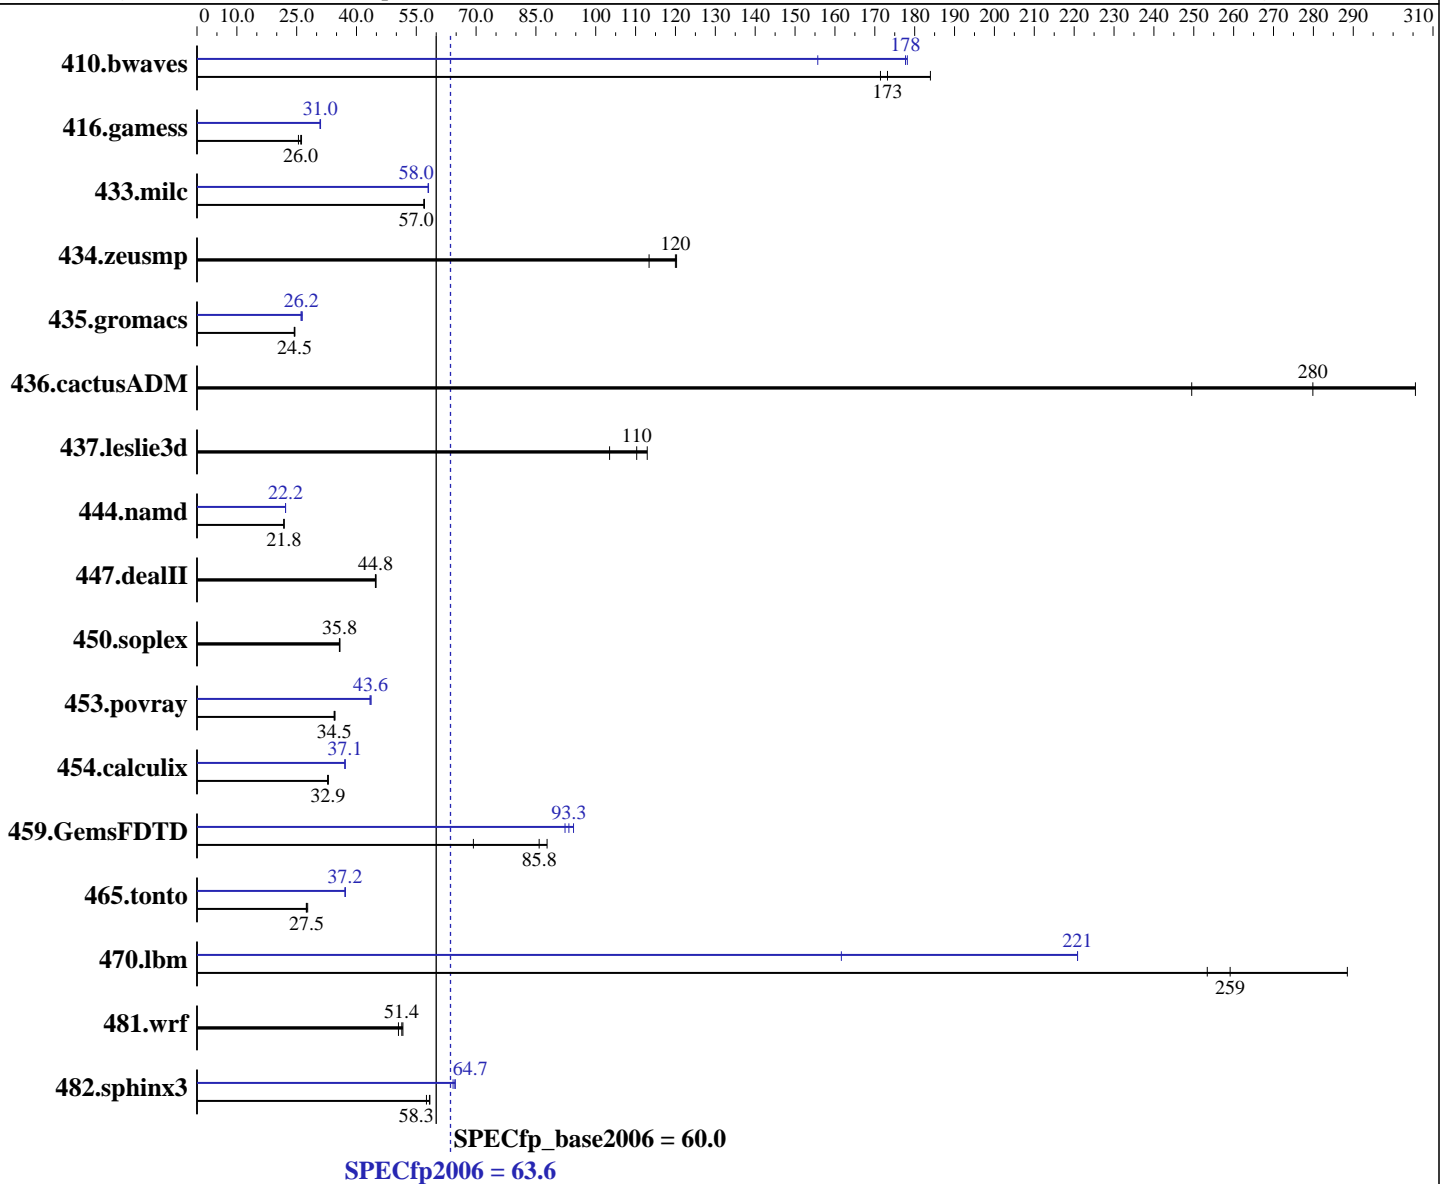

Hardware

CPU Name: Intel Xeon X5690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz
 CPU MHz: 3467
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64),
 Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE
 for applications running on Intel 64
 Version 12.0 Update 3
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = **63.6**

ASUS ESC4000(Z8PG-D18) Server System
(Intel Xeon X5690, 3.46 GHz)

SPECfp_base2006 = **60.0**

CPU2006 license: 9016

Test date: Aug-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx8 PC3L-10600E-9, ECC)
Disk Subsystem: Seagate ST3500320AS 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	78.5	173	79.3	171	73.9	184	76.5	178	76.3	178	87.3	156
416.gamess	770	25.4	747	26.2	753	26.0	632	31.0	635	30.8	632	31.0
433.milc	161	57.0	161	57.1	161	56.9	158	58.0	158	58.0	158	58.1
434.zeusmp	75.8	120	75.7	120	80.3	113	75.8	120	75.7	120	80.3	113
435.gromacs	293	24.4	291	24.6	292	24.5	273	26.1	273	26.2	270	26.4
436.cactusADM	47.9	249	42.7	280	39.1	306	47.9	249	42.7	280	39.1	306
437.leslie3d	90.8	103	85.2	110	83.2	113	90.8	103	85.2	110	83.2	113
444.namd	367	21.8	368	21.8	367	21.8	361	22.2	361	22.2	361	22.2
447.dealII	255	44.8	255	44.9	256	44.7	255	44.8	255	44.9	256	44.7
450.soplex	233	35.8	234	35.7	233	35.8	233	35.8	234	35.7	233	35.8
453.povray	155	34.4	154	34.5	154	34.6	123	43.4	122	43.6	122	43.6
454.calculix	252	32.8	250	32.9	251	32.9	222	37.1	222	37.1	222	37.1
459.GemsFDTD	121	87.8	124	85.8	153	69.3	115	92.3	114	93.3	112	94.4
465.tonto	358	27.5	359	27.4	354	27.8	264	37.2	265	37.2	265	37.2
470.lbm	53.0	259	54.2	253	47.6	289	62.2	221	62.2	221	85.0	162
481.wrf	217	51.4	221	50.5	216	51.6	217	51.4	221	50.5	216	51.6
482.sphinx3	334	58.3	339	57.5	334	58.4	303	64.2	301	64.8	301	64.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
Binaries compiled on RHEL5.5
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 63.6

ASUS ESC4000(Z8PG-D18) Server System
(Intel Xeon X5690, 3.46 GHz)

SPECfp_base2006 = 60.0

CPU2006 license: 9016

Test date: Aug-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -noFOR_main
 436.cactusADM: -DSPEC_CPU_LP64 -noFOR_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -noFOR_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 63.6

ASUS ESC4000(Z8PG-D18) Server System
(Intel Xeon X5690, 3.46 GHz)

SPECfp_base2006 = 60.0

CPU2006 license: 9016

Test date: Aug-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -parallel
-ansi-alias -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 63.6

ASUS ESC4000(Z8PG-D18) Server System
(Intel Xeon X5690, 3.46 GHz)

SPECfp_base2006 = 60.0

CPU2006 license: 9016

Test date: Aug-2011

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2011

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>
<http://www.spec.org/cpu2006/flags/ASUSTekPlatform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>
<http://www.spec.org/cpu2006/flags/ASUSTekPlatform.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000(Z8PG-D18) Server System
(Intel Xeon X5690, 3.46 GHz)

SPECfp2006 = 63.6

SPECfp_base2006 = 60.0

CPU2006 license: 9016

Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Aug-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 22:32:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 September 2011.