



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]_rate2006 = 122

IBM System x3250 M4 (Intel Xeon E3-1280)

SPECfp_rate_base2006 = 118

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2011

Hardware Availability: Oct-2011

Software Availability: Aug-2011

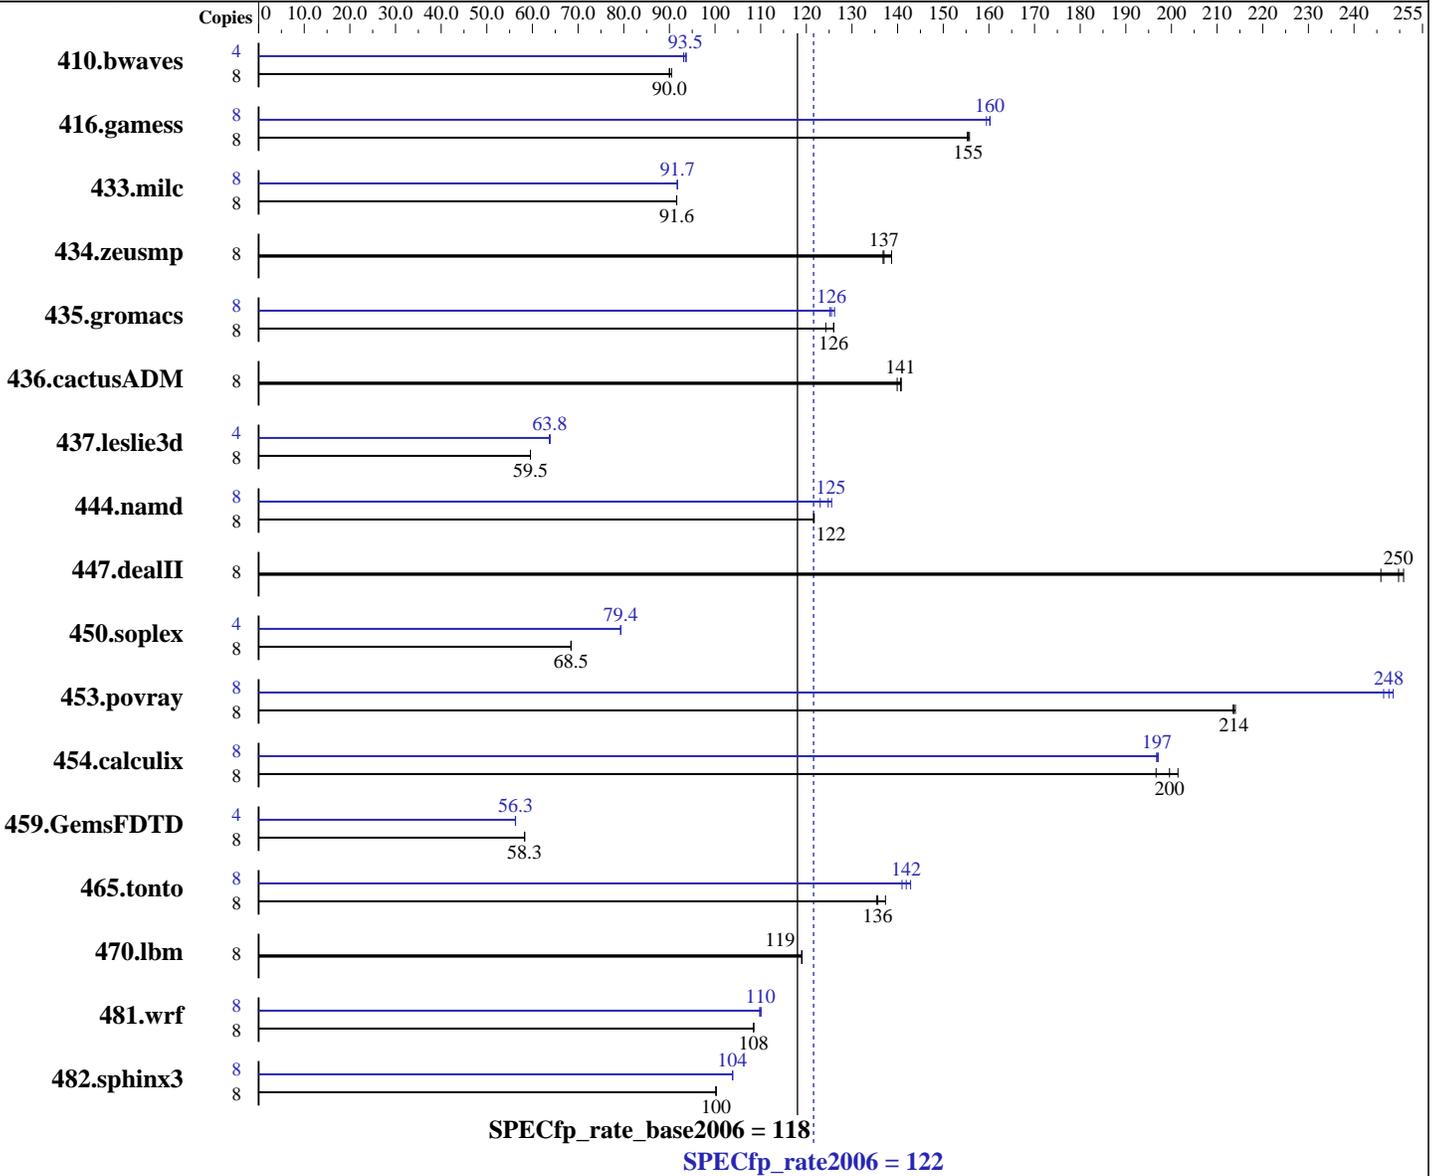

Hardware

CPU Name: Intel Xeon E3-1280
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on IA32 and Intel 64 12.1.0.225 Build 20110803
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = **122**

IBM System x3250 M4 (Intel Xeon E3-1280)

SPECfp_rate_base2006 = **118**

CPU2006 license: 11

Test date: Aug-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-10600E-9, ECC)
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1201	90.5	1208	90.0	1208	90.0	4	584	93.1	580	93.7	581	93.5
416.gamess	8	1009	155	1007	155	1006	156	8	978	160	977	160	982	159
433.milc	8	802	91.6	802	91.6	802	91.6	8	801	91.7	800	91.7	800	91.8
434.zeusmp	8	531	137	525	139	532	137	8	531	137	525	139	532	137
435.gromacs	8	453	126	453	126	460	124	8	453	126	455	126	456	125
436.cactusADM	8	679	141	683	140	680	141	8	679	141	683	140	680	141
437.leslie3d	8	1263	59.5	1263	59.5	1262	59.6	4	589	63.9	589	63.8	590	63.7
444.namd	8	528	122	527	122	527	122	8	511	126	521	123	514	125
447.dealII	8	372	246	365	251	366	250	8	372	246	365	251	366	250
450.soplex	8	974	68.5	975	68.4	974	68.5	4	421	79.3	420	79.4	420	79.4
453.povray	8	199	214	199	214	199	214	8	172	248	173	246	171	249
454.calculix	8	331	200	328	201	336	197	8	335	197	335	197	335	197
459.GemsFDTD	8	1457	58.3	1456	58.3	1457	58.3	4	754	56.3	754	56.3	754	56.3
465.tonto	8	581	135	573	137	580	136	8	551	143	555	142	558	141
470.lbm	8	924	119	923	119	923	119	8	924	119	923	119	923	119
481.wrf	8	824	108	823	109	824	108	8	812	110	813	110	814	110
482.sphinx3	8	1555	100	1557	100	1556	100	8	1501	104	1502	104	1502	104

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind copies to the cores

Platform Notes

BIOS Settings:
Turbo Mode enabled in BIOS
C-State enabled in BIOS



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 122

IBM System x3250 M4 (Intel Xeon E3-1280)

SPECfp_rate_base2006 = 118

CPU2006 license: 11

Test date: Aug-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/SPECcpu12.1/smartheap:/root/SPECcpu12.1/ic12.1-libs/ia32:/root/SPECcpu12.1/ic12.1-libs/intel64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

memory using RHEL5.5 with binutils-2.17.50.0.6-14.el5

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages disabled with:

echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 122

IBM System x3250 M4 (Intel Xeon E3-1280)

SPECfp_rate_base2006 = 118

CPU2006 license: 11

Test date: Aug-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 122

IBM System x3250 M4 (Intel Xeon E3-1280)

SPECfp_rate_base2006 = 118

CPU2006 license: 11

Test date: Aug-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -static -auto-ilp32
 470.lbm: basepeak = yes
 482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
 -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32
 447.dealII: basepeak = yes
 450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -opt-malloc-options=3
 453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static
 416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep- -static
 434.zeusmp: basepeak = yes
 437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 122

IBM System x3250 M4 (Intel Xeon E3-1280)

SPECfp_rate_base2006 = 118

CPU2006 license: 11

Test date: Aug-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

Peak Optimization Flags (Continued)

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 00:26:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 September 2011.