SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M4 (Intel Xeon E3-1260L)

SPECfp®2006 = 55.6

SPECfp_base2006 = 53.0

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2011
Hardware Availability: Oct-2011
Software Availability: Aug-2011

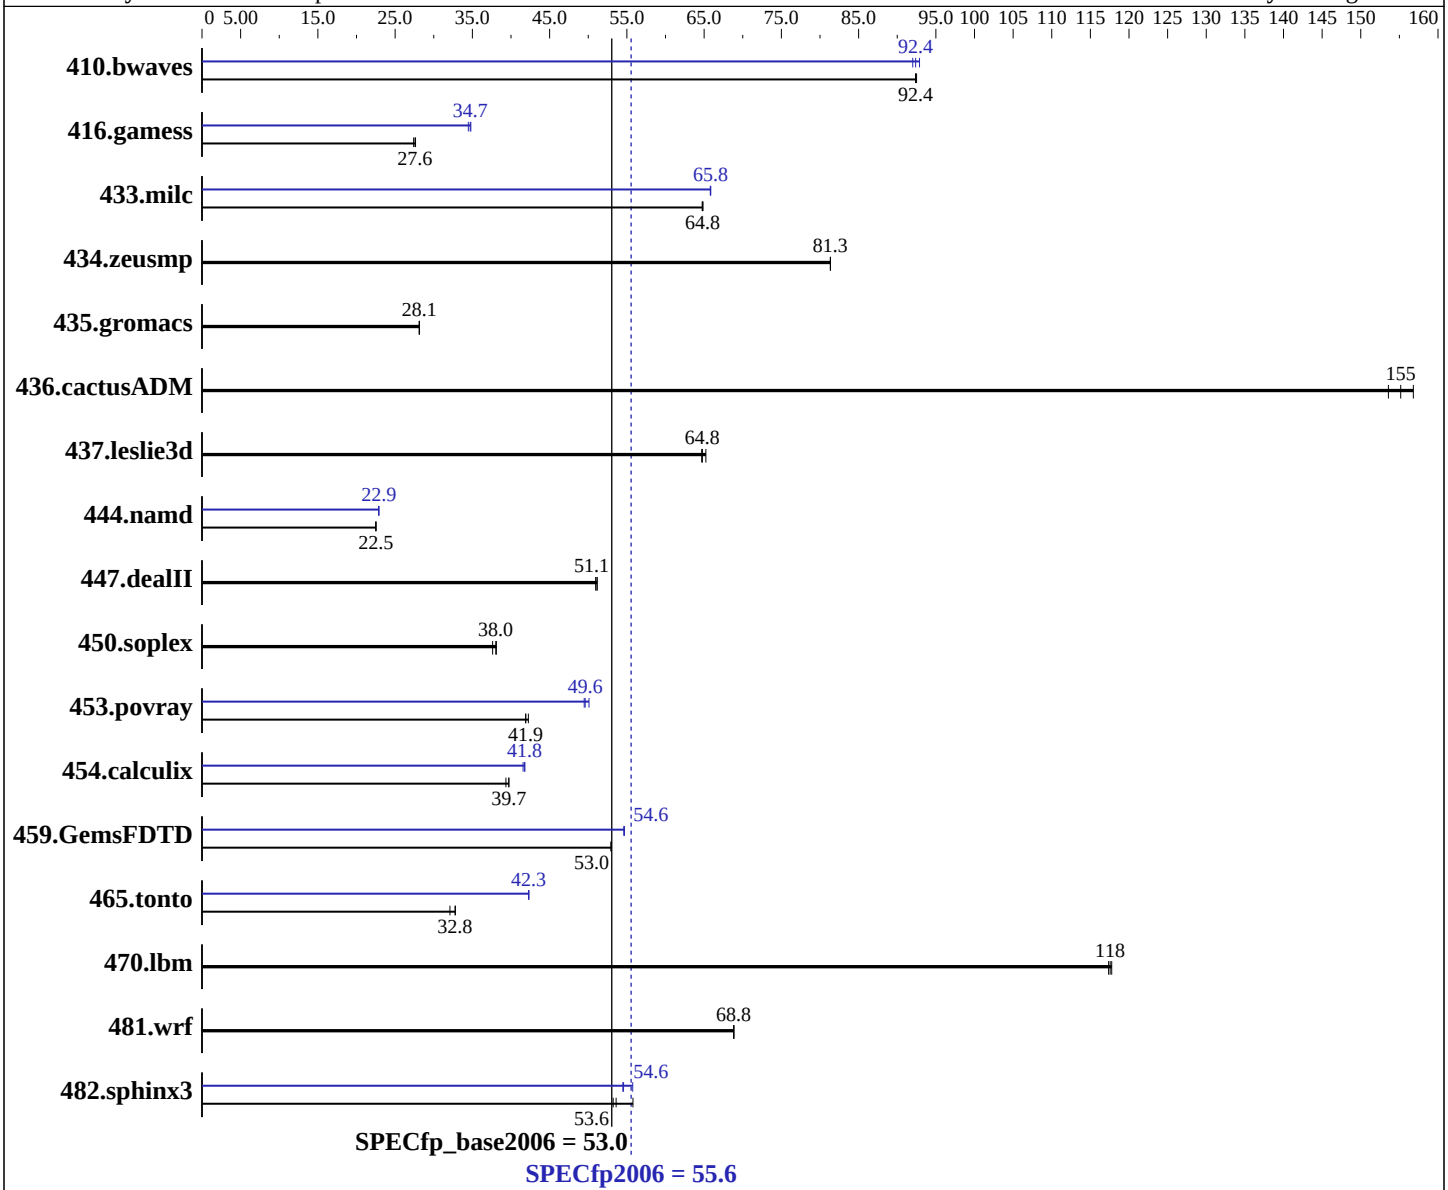

Hardware

CPU Name:	Intel Xeon E3-1260L
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++/Fortran: Version 12.1.0.225 of Intel Compiler XE Build 20110803
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M4 (Intel Xeon E3-1260L)

SPECfp2006 = 55.6

SPECfp_base2006 = 53.0

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2011
Hardware Availability: Oct-2011
Software Availability: Aug-2011

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)
Disk Subsystem: 1 x 146 GB SAS, 15000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	147	92.4	147	92.5	**147**	**92.4**	148	92.0	**147**	**92.4**	146	92.9
416.gamess	708	27.6	**710**	**27.6**	715	27.4	**564**	**34.7**	568	34.5	563	34.8
433.milc	**142**	**64.8**	142	64.9	142	64.7	139	65.9	**139**	**65.8**	140	65.8
434.zeusmp	112	81.3	**112**	**81.3**	112	81.4	112	81.3	**112**	**81.3**	112	81.4
435.gromacs	254	28.2	**254**	**28.1**	254	28.1	254	28.2	**254**	**28.1**	254	28.1
436.cactusADM	**77.0**	**155**	77.8	154	76.2	157	**77.0**	**155**	77.8	154	76.2	157
437.leslie3d	144	65.2	**145**	**64.8**	145	64.7	144	65.2	**145**	**64.8**	145	64.7
444.namd	356	22.5	**356**	**22.5**	356	22.5	350	22.9	351	22.9	**350**	**22.9**
447.dealII	225	51.0	**224**	**51.1**	224	51.1	225	51.0	**224**	**51.1**	224	51.1
450.soplex	222	37.6	219	38.1	**219**	**38.0**	222	37.6	219	38.1	**219**	**38.0**
453.povray	**127**	**41.9**	127	41.9	126	42.2	108	49.5	106	50.1	**107**	**49.6**
454.calculix	**208**	**39.7**	208	39.7	210	39.3	**198**	**41.8**	197	41.8	198	41.6
459.GemsFDTD	200	53.0	**200**	**53.0**	200	53.0	194	54.7	194	54.6	**194**	**54.6**
465.tonto	307	32.1	300	32.8	**300**	**32.8**	**233**	**42.3**	232	42.3	233	42.3
470.lbm	117	118	**117**	**118**	117	117	117	118	**117**	**118**	117	117
481.wrf	162	68.8	**162**	**68.8**	162	68.8	162	68.8	**162**	**68.8**	162	68.8
482.sphinx3	366	53.2	349	55.8	**364**	**53.6**	350	55.8	358	54.5	**357**	**54.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
BIOS Settings:
Turbo Mode enabled in BIOS
C-State enabled in BIOS
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/SPECcpu12.1/smartheap:/root/SPECcpu12.1/ic12.1-libs/ia32/:/root/SPECcpu12.1/ic12.1-libs/intel64"
OMP_NUM_THREADS = "4"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory
 using RHEL5.5 with binutils-2.17.50.0.6-14.el5
 Stack size set to unlimited using "ulimit -s unlimited"
```

Continued on next page

General Notes (Continued)

```
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-static -auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel`

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html
http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.20111206.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml
http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.20111206.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M4 (Intel Xeon E3-1260L)

SPECfp2006 = 55.6

SPECfp_base2006 = 53.0

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2011
Hardware Availability: Oct-2011
Software Availability: Aug-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:16:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 December 2011.