SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML110 G7 (3.10 GHz Intel Xeon E3-1220)

SPECint®_rate2006 = 143

SPECint_rate_base2006 = 137

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Nov-2011
Hardware Availability: Mar-2011
Software Availability: Sep-2011

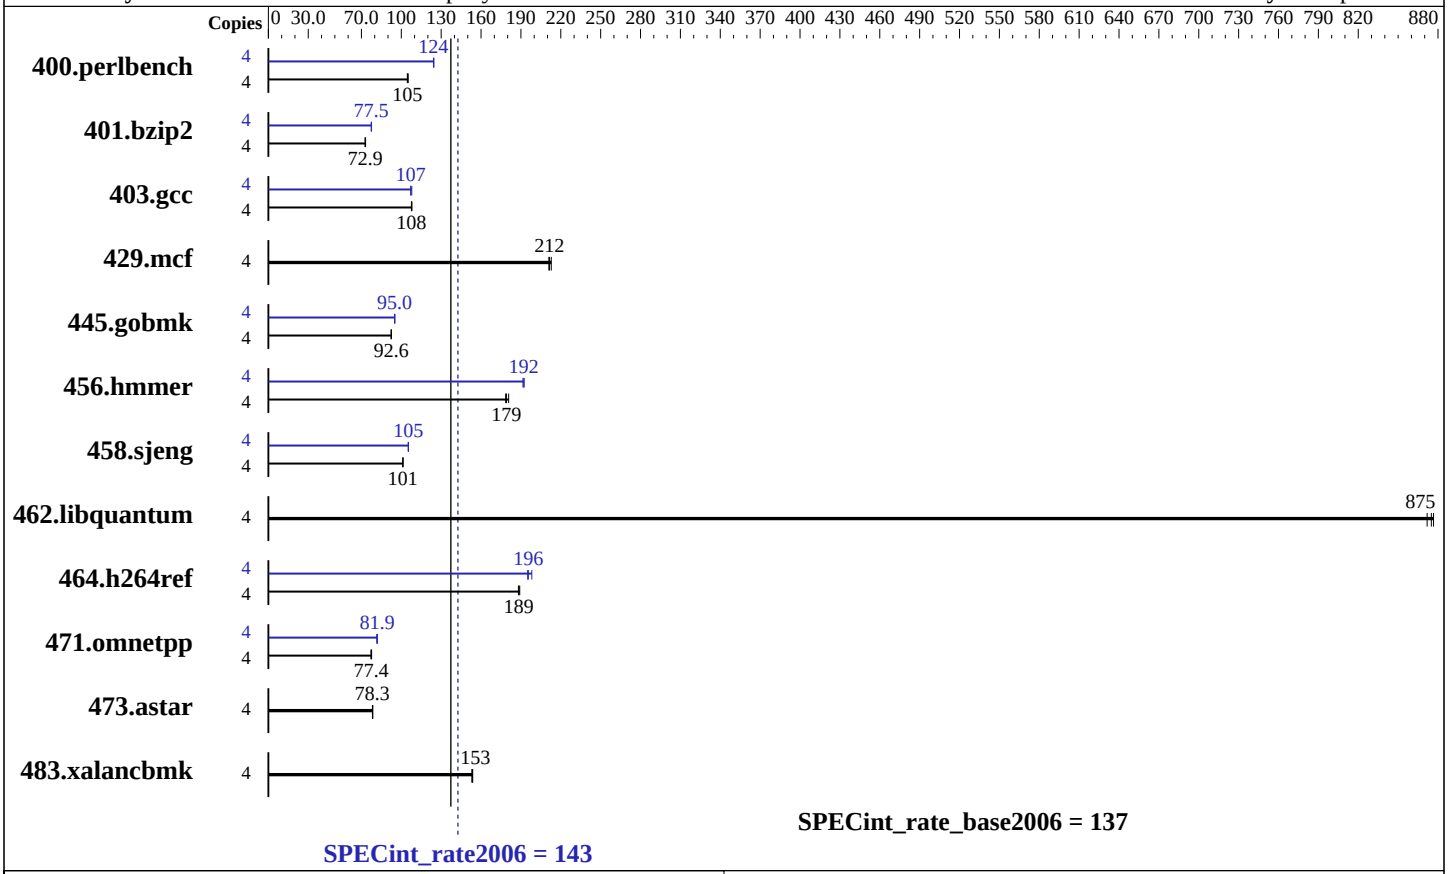

Hardware

CPU Name:	Intel Xeon E3-1220
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	3100
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)
Disk Subsystem:	1 x 500 GB 7.2 K SATA (OS), 1 x 750 GB 7.2 K SATA (benchmark files)
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.1 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML110 G7 (3.10 GHz Intel Xeon E3-1220)

SPECint_rate2006 = 143

SPECint_rate_base2006 = 137

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Nov-2011
Hardware Availability: Mar-2011
Software Availability: Sep-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	372	105	374	105	**373**	**105**	4	315	124	314	125	**314**	**124**
401.bzip2	4	**529**	**72.9**	528	73.1	531	72.8	4	**498**	**77.5**	497	77.6	499	77.4
403.gcc	4	299	108	298	108	**299**	**108**	4	298	108	301	107	**300**	**107**
429.mcf	4	173	211	**172**	**212**	171	213	4	173	211	**172**	**212**	171	213
445.gobmk	4	455	92.3	453	92.6	**453**	**92.6**	4	442	94.9	**442**	**95.0**	441	95.2
456.hmmer	4	**208**	**179**	209	179	206	181	4	**194**	**192**	195	192	194	192
458.sjeng	4	**478**	**101**	478	101	478	101	4	460	105	**460**	**105**	460	105
462.libquantum	4	**94.7**	**875**	95.1	872	94.5	877	4	**94.7**	**875**	95.1	872	94.5	877
464.h264ref	4	**470**	**189**	468	189	471	188	4	447	198	454	195	**453**	**196**
471.omnetpp	4	322	77.7	**323**	**77.4**	324	77.2	4	305	81.9	306	81.6	**305**	**81.9**
473.astar	4	359	78.3	357	78.6	**359**	**78.3**	4	359	78.3	357	78.6	**359**	**78.3**
483.xalancbmk	4	180	154	180	153	**180**	**153**	4	180	154	180	153	**180**	**153**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/SPEC/libs/32:/SPEC/libs/64"
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
```
icpc -m32
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20111122.html`
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20111122.xml`
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 01:04:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 December 2011.