SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX203 (Intel Xeon X5675)

SPECint®_rate2006 = 406

SPECint_rate_base2006 = 385

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Nov-2011
Hardware Availability: Jul-2011
Software Availability: Aug-2011

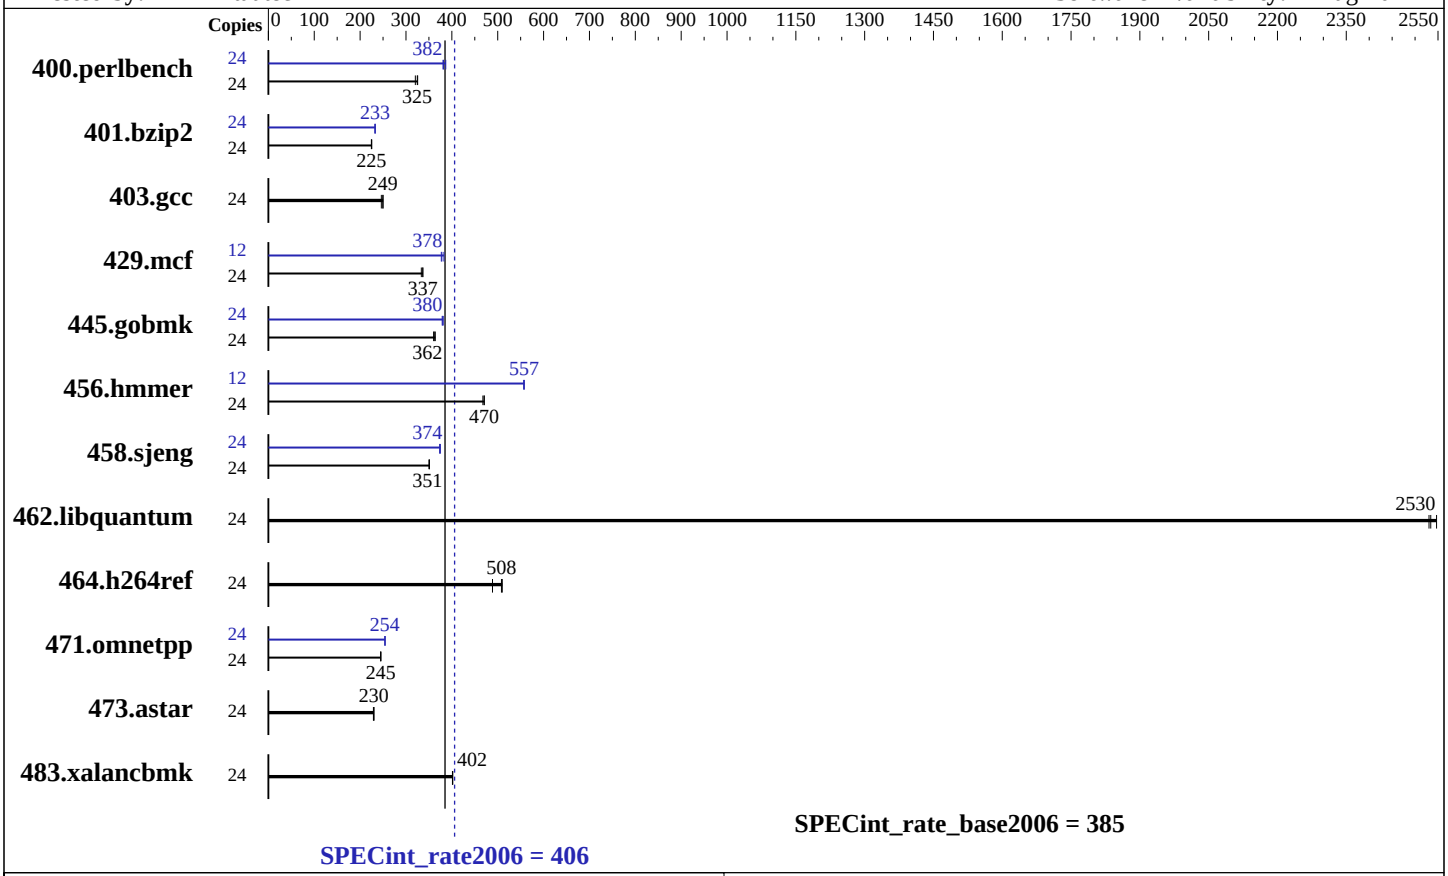

Hardware

CPU Name:	Intel Xeon X5675
CPU Characteristics:	Intel Turbo Boost Technology up to 3.46 GHz
CPU MHz:	3067
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 500 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	C/C++: Version 12.1.0 of Intel Compiler XE Build 20110811
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX203 (Intel Xeon X5675)

SPECint_rate2006 = 406

SPECint_rate_base2006 = 385

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Nov-2011
Hardware Availability: Jul-2011
Software Availability: Aug-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	720	325	732	320	**722**	**325**	24	606	387	616	381	**614**	**382**
401.bzip2	24	1028	225	**1029**	**225**	1031	225	24	997	232	994	233	**996**	**233**
403.gcc	24	785	246	**775**	**249**	772	250	24	785	246	**775**	**249**	772	250
429.mcf	24	650	337	656	333	**650**	**337**	12	**289**	**378**	290	377	286	383
445.gobmk	24	**696**	**362**	692	364	699	360	24	660	381	**663**	**380**	664	379
456.hmmer	24	**476**	**470**	479	468	476	471	12	**201**	**557**	201	558	201	557
458.sjeng	24	**828**	**351**	827	351	829	351	24	775	375	778	373	**776**	**374**
462.libquantum	24	195	2550	**196**	**2530**	197	2530	24	195	2550	**196**	**2530**	197	2530
464.h264ref	24	1042	510	**1045**	**508**	1087	489	24	1042	510	**1045**	**508**	1087	489
471.omnetpp	24	613	245	**612**	**245**	612	245	24	**590**	**254**	590	254	590	254
473.astar	24	732	230	**733**	**230**	736	229	24	732	230	**733**	**230**	736	229
483.xalancbmk	24	**412**	**402**	413	401	412	402	24	**412**	**402**	413	401	412	402

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run
```

Platform Notes

```
Data Reuse disabled in BIOS.
```

General Notes

```
This result was measured on the Servidor Itautec MX223.
The Servidor Itautec MX203 and the Servidor Itautec MX223
are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

Continued on next page

Peak Optimization Flags (Continued)

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.html`
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.xml`
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:43:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 December 2011.