SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL585 G7
(2.30 GHz AMD Opteron 6276)

SPECint®_rate2006 = 949

SPECint_rate_base2006 = 829

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Nov-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

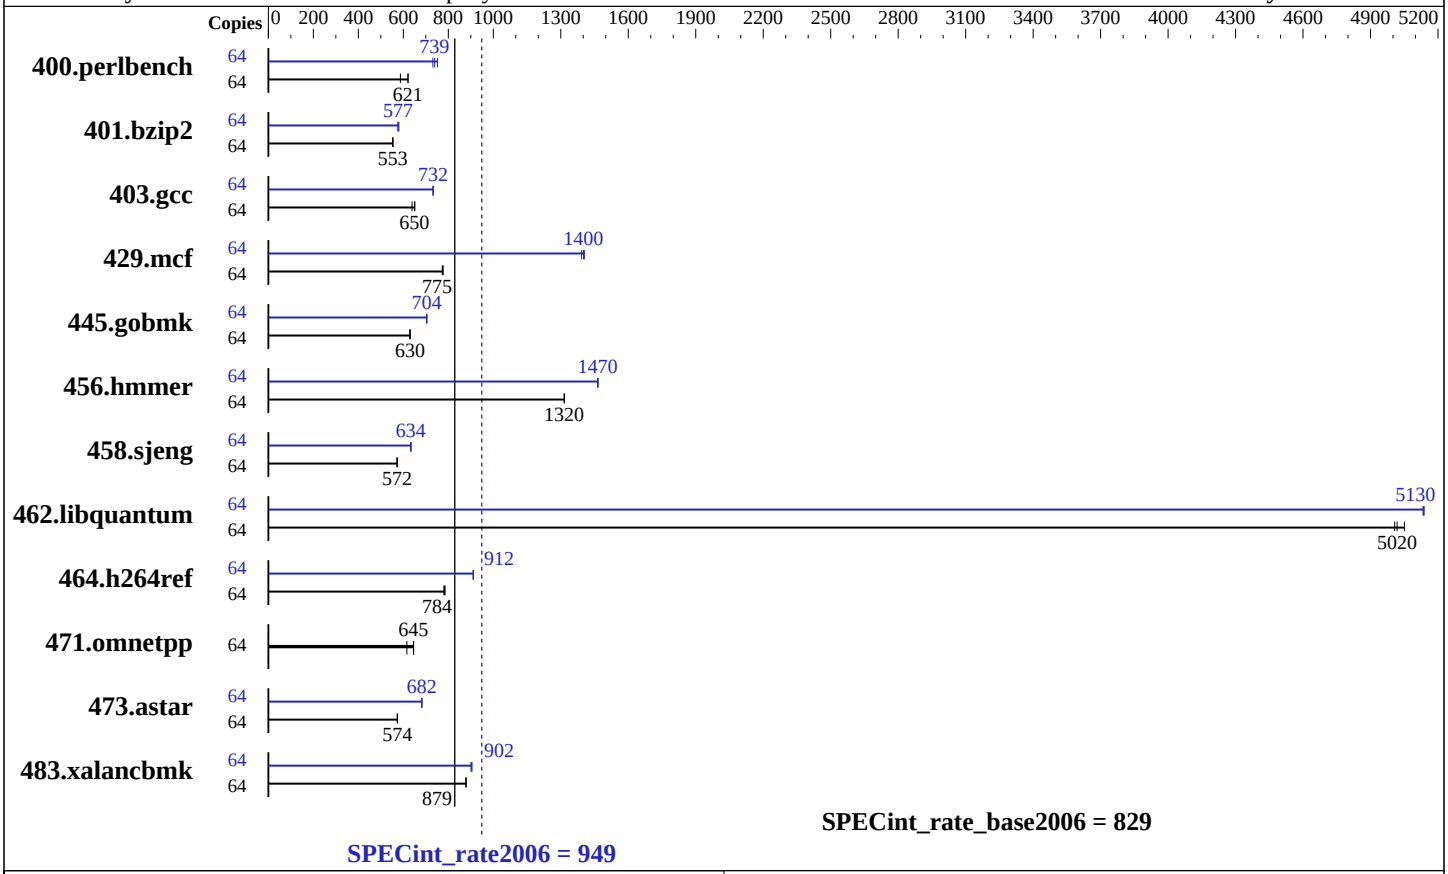

Hardware

CPU Name:	AMD Opteron 6276
CPU Characteristics:	AMD Turbo CORE technology up to 3.20 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	64 cores, 4 chips, 16 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	512 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	16 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 8 cores
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 500 GB 7.2 K SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 10.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL585 G7
(2.30 GHz AMD Opteron 6276)

SPECint_rate2006 = 949

SPECint_rate_base2006 = 829

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Nov-2011
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1007	621	1065	587	**1008**	**621**	64	855	731	832	751	**846**	**739**
401.bzip2	64	**1117**	**553**	1115	554	1119	552	64	**1071**	**577**	1073	576	1064	580
403.gcc	64	791	651	**793**	**650**	807	639	64	703	733	**703**	**732**	703	732
429.mcf	64	**753**	**775**	752	777	755	773	64	**417**	**1400**	419	1390	415	1400
445.gobmk	64	1067	629	1066	630	**1066**	**630**	64	953	704	954	704	**953**	**704**
456.hmmer	64	454	1320	454	1320	**454**	**1320**	64	**408**	**1470**	407	1470	408	1460
458.sjeng	64	**1353**	**572**	1354	572	1352	573	64	1221	634	1224	633	**1222**	**634**
462.libquantum	64	265	5010	263	5050	**264**	**5020**	64	258	5130	**258**	**5130**	258	5140
464.h264ref	64	1815	780	1804	785	**1807**	**784**	64	**1553**	**912**	1553	912	1557	910
471.omnetpp	64	650	616	619	646	**620**	**645**	64	650	616	619	646	**620**	**645**
473.astar	64	784	573	**783**	**574**	783	574	64	658	683	**658**	**682**	659	682
483.xalancbmk	64	**503**	**879**	503	879	503	878	64	488	905	490	901	**490**	**902**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot paramenter in /boot/grub/menu.lst
Set kernel/randomize_va_space=0 in /etc/sysctl.conf

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
Set "nodev       /mnt/hugepages    hugetlbfs   defaults  0 0" in /etc/fstab
```

Platform Notes

```
BIOS settings:
 HP Power Profile set to Maximum Performance
 Thermal Configuration set to Increased Cooling
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/cpu2006/amd1104-rate-libs-revA/32:/cpu2006/amd1104-rate-libs-revA/64"
```

Continued on next page

General Notes (Continued)

```
The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=on
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
-IPA:plimit=20000 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
-CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
-OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
-INLINE:aggressive=on -CG:gcm=off
-GRA:prioritize_by_density=on -m32 -HP:bdt=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
-OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1
-LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
-OPT:alias=disjoint -OPT:unroll_times_max=16
-OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
-CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
-HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
-LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:bd=2m:heap=2m
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll_size=512
-OPT:unroll_times_max=16 -LNO:prefetch=2
-LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=15000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -IPA:plimit=20000
-OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-GRA:optimize_boundary=on -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000
-m32 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.html
http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html
http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.xml
http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml
http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:47:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 December 2011.