



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4280

**SPECfp<sup>®</sup>\_rate2006 = 198**

**SPECfp\_rate\_base2006 = 185**

**CPU2006 license:** 49


**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Dec-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

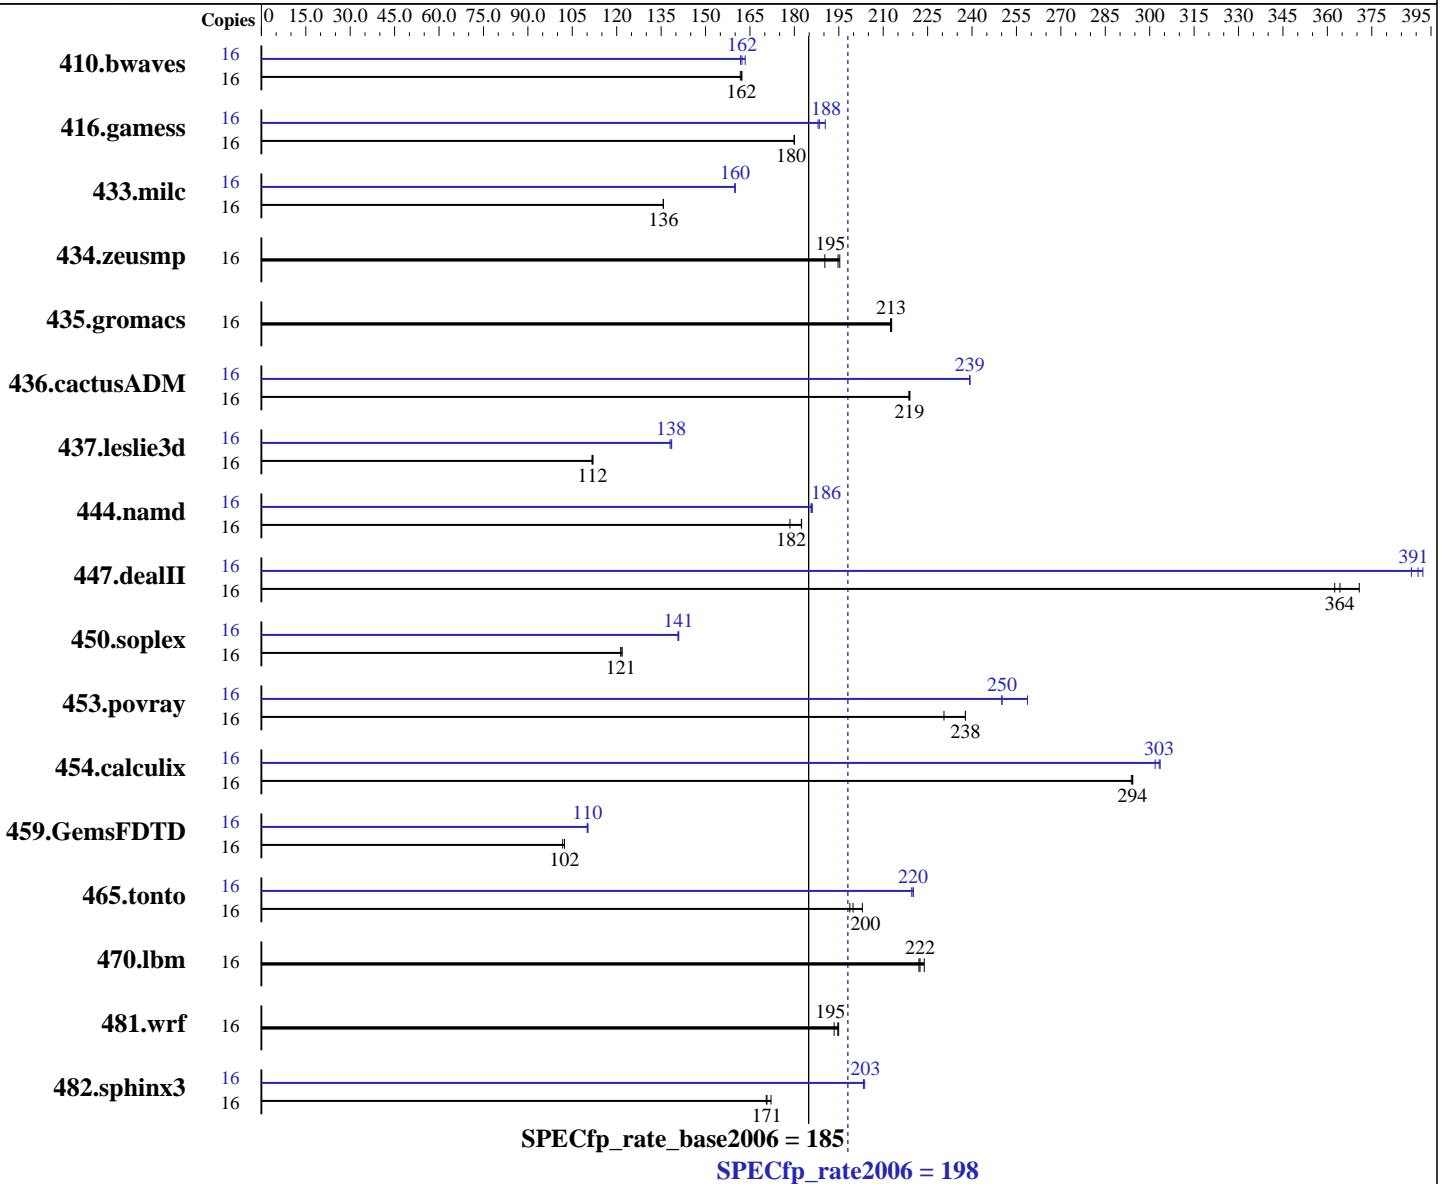

### Hardware

CPU Name: AMD Opteron 4280  
 CPU Characteristics: AMD Turbo CORE technology up to 3.50 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4280

SPECfp\_rate2006 = 198

SPECfp\_rate\_base2006 = 185

CPU2006 license: 49  
Test sponsor: Advanced Micro Devices  
Tested by: Advanced Micro Devices

Test date: Dec-2011  
Hardware Availability: Nov-2011  
Software Availability: Jul-2011

Primary Cache: 256 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core  
Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores  
L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 120 GB SATA, 7200 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	<u>1341</u>	<u>162</u>	1340	162	1344	162	16	1344	162	1331	163	<u>1340</u>	<u>162</u>		
416.gamess	16	1741	180	<u>1741</u>	<u>180</u>	1741	180	16	1666	188	<u>1663</u>	<u>188</u>	1645	190		
433.milc	16	1082	136	1082	136	<u>1082</u>	<u>136</u>	16	918	160	918	160	<u>918</u>	<u>160</u>		
434.zeusmp	16	765	190	<u>748</u>	<u>195</u>	745	195	16	765	190	<u>748</u>	<u>195</u>	745	195		
435.gromacs	16	537	213	538	212	<u>537</u>	<u>213</u>	16	537	213	538	212	<u>537</u>	<u>213</u>		
436.cactusADM	16	<u>874</u>	<u>219</u>	873	219	874	219	16	799	239	799	239	<u>799</u>	<u>239</u>		
437.leslie3d	16	1347	112	<u>1345</u>	<u>112</u>	1343	112	16	1090	138	1085	139	<u>1086</u>	<u>138</u>		
444.namd	16	719	179	<u>704</u>	<u>182</u>	703	182	16	691	186	<u>691</u>	<u>186</u>	690	186		
447.dealII	16	<u>503</u>	<u>364</u>	505	362	494	371	16	<u>469</u>	<u>391</u>	471	388	467	392		
450.soplex	16	<u>1099</u>	<u>121</u>	1095	122	1099	121	16	947	141	<u>947</u>	<u>141</u>	949	141		
453.povray	16	<u>358</u>	<u>238</u>	358	238	369	231	16	<u>340</u>	<u>250</u>	340	250	329	259		
454.calculix	16	<u>449</u>	<u>294</u>	449	294	449	294	16	437	302	435	304	<u>435</u>	<u>303</u>		
459.GemsFDTD	16	1668	102	<u>1658</u>	<u>102</u>	1658	102	16	1539	110	1543	110	<u>1541</u>	<u>110</u>		
465.tonto	16	792	199	776	203	<u>788</u>	<u>200</u>	16	<u>715</u>	<u>220</u>	715	220	717	220		
470.lbm	16	<u>988</u>	<u>222</u>	982	224	990	222	16	<u>988</u>	<u>222</u>	982	224	990	222		
481.wrf	16	<u>918</u>	<u>195</u>	917	195	924	193	16	<u>918</u>	<u>195</u>	917	195	924	193		
482.sphinx3	16	<u>1826</u>	<u>171</u>	1812	172	1829	171	16	1534	203	1531	204	<u>1533</u>	<u>203</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4280

**SPECfp\_rate2006 = 198**

**SPECfp\_rate\_base2006 = 185**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Dec-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

## Operating System Notes (Continued)

Set kernel/randomize\_va\_space=0 in /etc/sysctl.conf

Huge pages were not configured for this run.

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/work/cpu2006v1.2/amd1104-rate-libs-revB/32:/root/work/cpu2006v1.2/amd1104-rate-libs-revB/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6282SE chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4280

**SPECfp\_rate2006 = 198**

**SPECfp\_rate\_base2006 = 185**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Dec-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso -LNO:blocking=off  
-OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4280

**SPECfp\_rate2006 = 198**

**SPECfp\_rate\_base2006 = 185**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Dec-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

## Peak Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
        -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
        -HP:bd=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
        -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
        -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
        -CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
        -LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
        -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
        -CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
        -fno-exceptions -HP:bd=2m:heap=2m

```

```

447.deallI: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
        -INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
        -fno-emit-exceptions -m32 -OPT:unroll_times_max=8
        -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bd=2m:heap=2m
        -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
        -TENV:frame_pointer=off

```

```

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
        -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
        -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
        -OPT:fold_unsigned_relops=on -fno-exceptions -m32
        -HP:bd=2m:heap=2m -WOPT:sib=on

```

```

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
        -fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
        -INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4280

**SPECfp\_rate2006 = 198**

**SPECfp\_rate\_base2006 = 185**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Dec-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

## Peak Optimization Flags (Continued)

453.povray (continued):

-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:ignore\_feedback=off -LNO:fu=4  
-LNO:loop\_model\_simd=on -LNO:simd\_rm\_unity\_remainder=on  
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp\_peep=on

416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: basepeak = yes

437.leslie3d: -march=bdver1 -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0  
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll\_size=0 -LNO:fission=2  
-CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
-LNO:prefetch=2 -HP -CG:locs\_shallow\_depth=1 -CG:load\_exe=0  
-WOPT:sib=on

454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.html>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228  
AMD Opteron 4280

**SPECfp\_rate2006 = 198**

**SPECfp\_rate\_base2006 = 185**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Dec-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 03:22:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 January 2012.