



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

(Test Sponsor: Acer Incorporation)

SPECint®2006 = 54.2

Acer AT310 F2 (Xeon E3-1280)

SPECint_base2006 = 51.0

CPU2006 license: 97


Test sponsor: Acer Incorporation

Tested by: Acer Incorporation

Test date: Dec-2011

Hardware Availability: Jan-2012

Software Availability: Dec-2011

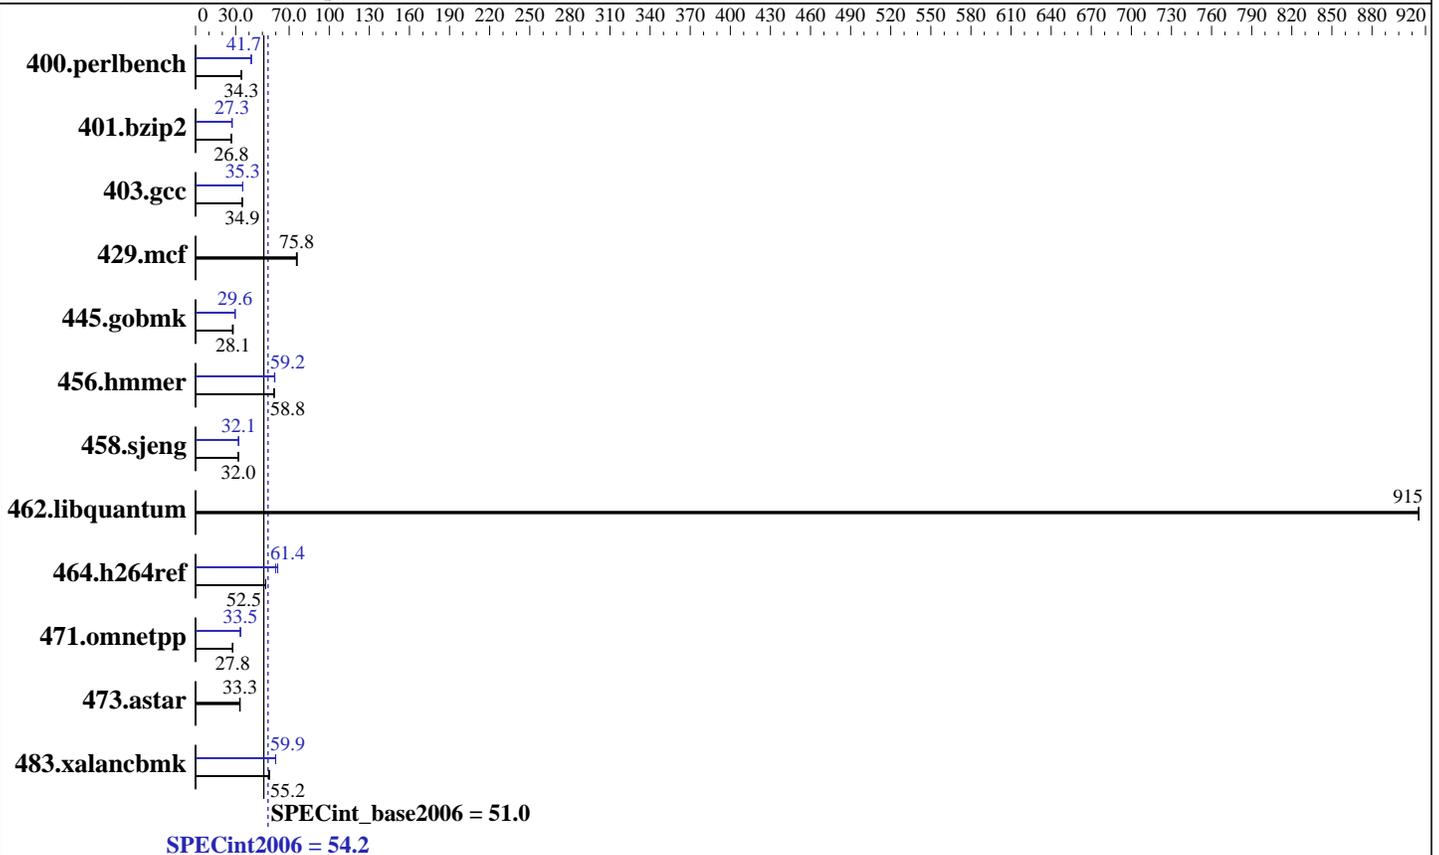

Hardware

CPU Name: Intel Xeon E3-1280
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9,ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1
 Kernel 2.6.32-131.0.15.el6.x86_64-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated
(Test Sponsor: Acer Incorporation)

SPECint2006 = 54.2

Acer AT310 F2 (Xeon E3-1280)

SPECint_base2006 = 51.0

CPU2006 license: 97
Test sponsor: Acer Incorporation
Tested by: Acer Incorporation

Test date: Dec-2011
Hardware Availability: Jan-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	285	34.3	285	34.3	285	34.2	234	41.7	235	41.6	234	41.7
401.bzip2	361	26.8	361	26.8	360	26.8	353	27.3	354	27.3	353	27.3
403.gcc	230	35.0	231	34.9	231	34.9	228	35.3	228	35.3	228	35.3
429.mcf	120	76.0	121	75.4	120	75.8	120	76.0	121	75.4	120	75.8
445.gobmk	381	27.5	374	28.1	374	28.1	355	29.6	355	29.6	355	29.6
456.hmmr	159	58.8	159	58.8	159	58.8	157	59.3	158	59.0	158	59.2
458.sjeng	378	32.0	378	32.0	378	32.0	376	32.2	376	32.1	376	32.1
462.libquantum	22.6	915	22.6	915	22.6	915	22.6	915	22.6	915	22.6	915
464.h264ref	422	52.5	422	52.5	422	52.4	369	60.0	360	61.5	360	61.4
471.omnetpp	225	27.8	227	27.5	224	27.9	186	33.7	187	33.5	186	33.5
473.astar	211	33.3	211	33.3	212	33.0	211	33.3	211	33.3	212	33.0
483.xalancbmk	125	55.2	125	55.2	126	54.7	115	59.9	115	60.0	115	59.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Large pages were disabled for this run.

General Notes

Binaries compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:
icc -m64
C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated
(Test Sponsor: Acer Incorporation)

SPECint2006 = 54.2

Acer AT310 F2 (Xeon E3-1280)

SPECint_base2006 = 51.0

CPU2006 license: 97

Test date: Dec-2011

Test sponsor: Acer Incorporation

Hardware Availability: Jan-2012

Tested by: Acer Incorporation

Software Availability: Dec-2011

Base Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated
(Test Sponsor: Acer Incorporation)

SPECint2006 = 54.2

Acer AT310 F2 (Xeon E3-1280)

SPECint_base2006 = 51.0

CPU2006 license: 97

Test date: Dec-2011

Test sponsor: Acer Incorporation

Hardware Availability: Jan-2012

Tested by: Acer Incorporation

Software Availability: Dec-2011

Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
           -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
         -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
           -ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
           -ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2)
             -opt-ra-region-strategy=block -ansi-alias
             -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated
(Test Sponsor: Acer Incorporation)

SPECint2006 = 54.2

Acer AT310 F2 (Xeon E3-1280)

SPECint_base2006 = 51.0

CPU2006 license: 97
Test sponsor: Acer Incorporation
Tested by: Acer Incorporation

Test date: Dec-2011
Hardware Availability: Jan-2012
Software Availability: Dec-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 01:57:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 February 2012.